

Superior Attachments Inc

FREE STALL MANAGEMENT EQUIPMENT



- **SUPERIOR SCRAPER**
- **FEED PUSHER**
- **MAT MATE**
- **BEDDING EXTRACTOR**
- **LIME DISPENSER**
- **SANDMAN**

VISIT OUR WEBSITE SUPERIORATTACHMENTS.COM



800-450-7292



INFO@SUPERIORATTACHMENTS.COM



MADE IN THE USA




SUPERIOR SCRAPER

SKID STEER MOUNT

AN EASY, AUTOMATICALLY ADJUSTABLE MANURE SCRAPER

- Floating linkage prevents excessive down pressure
- Improved skid steer traction
- Reduces uneven wear of scraper wings
- Self adjusting wings ensure consistent curb contact & pressure, ensuring effective manure removal
- Operated with boom down to increase operator visibility
- Independent wing movement
- Automatically adjusts to variable width alleyways
- Open and close wings with skid steer auxiliary hydraulics
- Operating width 6 ft to 14 ft



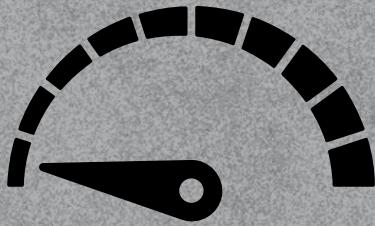


Floating linkage prevents excessive down pressure



Reduces labor and increases efficiency



Operated with boom down to increase operator's visibility

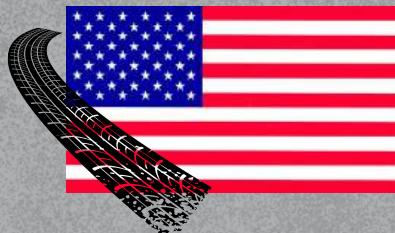

Durable, adjustable high-tensile rubber ensures long service life. USA made.



**COMPACT DESIGN
FOLDS FOR EASY MANEUVERABILITY
AND BACK SCRAPING**



**CONSTANT OUTWARD PRESSURE
WITH LOW PSI RELIEF KEEPS WINGS
AGAINST CURBS.**



3 SUPERIOR SCRAPER SIZES

S610 - 10FT OPEN | 6FT CLOSED

S712 - 12FT OPEN | 7FT CLOSED

S814 - 14FT OPEN | 8FT CLOSED



SUPERIOR SCRAPER

3-POINT MOUNT


AN EASY, AUTOMATICALLY ADJUSTABLE MANURE SCRAPER

- Reduces labor and increases efficiency
- Built for rugged farm use
- Two hydraulic options. Hard plumb electric valve for easy operation by switches or run off rear remotes with optional accumulator
- Flat back design allows closer proximity to gates and end walls
- Automatic hydraulic float with variable outward pressure on curbs
- Automatically adjusts to variable width alleys
- Electric controls allow for cylinders to have a low PSI relief to protect the cylinders and the three point arms of the tractor
- Open width of 14ft and closed width of 8ft
- Speeds up a labor intensive job





Built for rugged farm use



Open width of 14 feet



Speeds up a labor intensive job



Rear 3-point scraper clears away from walls and gates, eliminating the need for turning around



FLAT BACK
ALLOWS CLOSER PROXIMITY TO GATES AND END WALLS



ONE PASS CLEANING
HYDRAULICS GIVE CONSTANT OUTWARD PRESSURE ON CURBS, EVEN IF THE OPERATOR DRIFTS OFF CENTER



3 POINT MOUNT
GREATER STABILITY AND TRACTION, QUICK AND EASY IMPLEMENT CHANGES, AND BETTER OVERALL CONTROL.




SUPERIOR SCRAPER

TRACTOR MOUNT


AN EASY, AUTOMATICALLY ADJUSTABLE MANURE SCRAPER

- Reduces labor and increases efficiency
- Built for rugged farm use
- Two hydraulic options. Hard plumb electric valve for easy operation by switches or run off rear remotes with optional accumulator
- Automatic hydraulic float with variable outward pressure on curbs
- Automatically adjusts to variable width alleys
- Attach any skid steer size scraper to the front of your compact tractor
- Speeds up a labor intensive job
- Electric controls allow for cylinders to have a low PSI relief for protection
- Operating width 6 ft to 14 ft
- Rigid frame pushes on drawbar of tractor





Electrical controls reduce PSI relief in cylinders, enhancing performance and protection



Automatically adjusts to variable width alleys



Built for rugged farm use



Reduces labor and increases efficiency



CONNECTION

ATTACH OUR SKID STEER SCRAPER TO THE FRONT OF YOUR COMPACT TRACTOR



SIZE OPTIONS

S610 - 10FT OPEN 6FT CLOSED

S712 - 12FT OPEN 7FT CLOSED

S814 - 14FT OPEN 8FT CLOSED



WINGS

OPEN AND CLOSE WINGS WITH A FLIP OF A SWITCH



FEED PUSHER

SKID STEER MOUNT

- Floating linkage prevents excessive down pressure to feed pusher, providing improved traction and reduces excessive wear on the rubber edge
- Operated with boom down to increase operator's visibility
- Adjustable and reversible rubber edge for extended life
- V-style allows for pushing in either direction
- Made in the USA with 100% USA made high-tensile adjustable rubber






Clear Visibility



Floating linkage
improves traction



Push in either direction



MADE IN USA



FLOATING LINKAGE



CLEAR VISIBILITY



PUSH IN EITHER
DIRECTION



ADJUSTABLE AND
REVERSIBLE RUBBER



BEDDING EXTRACTOR

SKID STEER MOUNT

- Two passes with the extractor will cleanly remove up to 10" of bedding
- Powers bedding into the aisle for easy cleanup
- Effective way to remove bedding with high bacterial count from the rear of the stall
- Carbide mounted teeth remove the toughest bedding
- Speeds up a labor-intensive job
- Raises to a vertical position for transport
- Curb indicator
- Equipped with its own parking stand
- Quickly connects to a skid steer universal mounting plate.





Vertical positioning
for transport




No more back
breaking shoveling



2 passes cleanly remove
up to 10" of bedding



Makes quick work of
removing soiled bedding

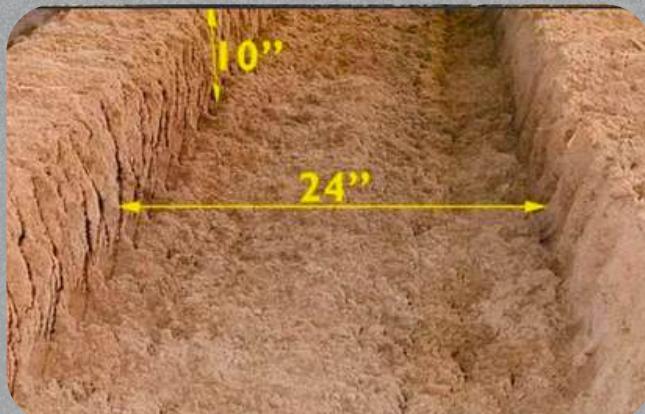

FINISHED TRENCH



AUGER SCRAPER



CURB GUIDE



CARBIDE TIPPED AUGER



MAT MATE

SKID STEER MOUNT

- Mat Mate powers off organic material at a rate that normal scraping cannot match
- Better removal of organic material means mats will dry quicker
- Drier and cleaner mats lower bacterial growth
- Skid Steer Universal mounting plate
- One set of hydraulic couplers runs Mat-Mate's rotary brush and operates the boom
- Optional sprayer attachments applies disinfectant to the brushed areas






Powers off organic material at a rate unmatched by normal scraping



Optional sprayer lowers SCC



Compact design makes it easy to maneuver in tight areas



MORE effective than hand brushing



RAISED BOOM



OPTIONAL SPRAYER



BRUSHING




MAT MATE


SIDE MOUNT

- Brushing area is clearly visible from the tractor seat, allowing the operator to clean stalls with ease
- Rotary brush is driven by a high torque low RPM motor
- Operator adjusts the amount the brush contacts the bed
- All functions are controlled by the fender mounted toggle switch control box
- Mat Mate powers off organic material at a rate that normal scraping cannot match
- Better removal of organic material means mats will dry quicker
- Drier and cleaner mats lower bacterial growth
- Optional sprayer attachments applies disinfectant to the brushed areas






Better removal means stalls dry quicker

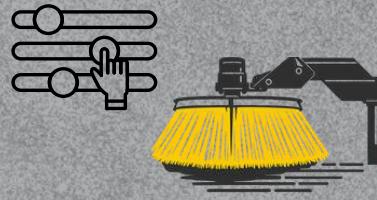

Operator adjusts the amount of contact between the brush and bed



High visibility for the operator from the tractor seat



Drier & cleaner mats lower bacterial growth



TRACTOR FENDER MOUNT ELECTRONIC CONTROLS



ROTARY BRUSH ADJUSTMENT



CLEAN MATTRESS



LIME DISPENSER

3 POINT MOUNT

- Category 1 hitch that is compatible with standard compact and utility tractors
- 0.75 cubic yard capacity for efficient operation
- Hydraulic cylinder allows bucket to scoop materials from bulk piles
- Built-in breakaway shear bolt on boom arm provides overload and obstruction protection
- Separate adjustable-flow augers to customize discharge
- Agitators to prevent bridging in bucket and ensures smooth flow
- Roll up tarp for protection and safety
- Electric controls for simple operation
- 24" dispensing wide area for a consistent spread
- Open-end auger allows discharge of small stones or coarse material






Simple Operational Controls



Tarp covered dispenser to prevent contamination and promote safety



Lime increases the bedding PH, reducing the risk of Mastitis



Separate adjustable-flow augers with an open end for discharging coarse material



HYDRAULIC TIPPING EASILY SCOOPS LIME



AGITATORS PROMOTE SMOOTH FLOW



REAR MOUNT ON TRACTOR



24" SPREAD WIDTH



SANDMAN


SKID STEER MOUNT

SANDMAN LP (Low Profile) – Designed for versatility across different stall layouts

BEYOND SAND. BUILT FOR BEDDING.

- Designed to aerate, slope and groom free stall beds in one step
- Sloping the bed improves cow comfort
- Sloping promotes proper cow placement within the stall keeping manure in the aisle
- Aeration dries bedding and reduces bacterial growth
- Speeds up a labor-intensive job and lowers costs
- Raises to a vertical position for transport
- Boom and rotary arm are hydraulically driven
- Rotary motor starts once boom is lowered
- Compact design and hydraulically raised boom makes it easy to maneuver in tight areas







Sandman works under the stall loops



Rakes at a walking pace for quick prep of the stall beds



Grooms to an uphill slope that cows prefer to lay on



Aeration dries bedding and reduces bacterial growth



CURB SCRAPER

SCRAPES THE TOP OF THE CURB
BRINGING BEDDING BACK INTO THE STALL



ROTARY ARM

BOLTED ON, REPLACEABLE SHOVELS



SLOPED AND AERATED
IMPROVES COW COMFORT AND DRIES
BEDDING TO LOWER SCC AND MASTITIS



SANDMAN

SIDE MOUNT

SANDMAN LP (Low Profile) – Designed for versatility across different stall layouts

BEYOND SAND. BUILT FOR BEDDING.

- 8 inches of vertical travel
- Designed to aerate, slope and groom free stall beds in one step
- Sloping promotes proper cow placement within the stall keeping manure in the aisle and improving cow comfort
- Compact design and hydraulically raised boom makes it easy to maneuver in tight areas
- Aeration dries bedding to lower SCC and Mastitis
- Speeds up a labor intensive job and lowers costs
- Raises to a vertical position for transport
- Boom and rotary arm are hydraulically driven
- Rotary motor starts once boom is lowered






Slopes beds to improve cow comfort



Encourages proper cow placement to keep manure in the aisle



Lower Somatic cell count



LOW PROFILE GEARBOX

HEAVY DUTY GEARBOX ALLOWS CLEARANCE UNDER LOWER STALL LOOPS




CURB SCRAPER

SCRAPES THE TOP OF THE CURB BRINGING BEDDING BACK INTO THE STALL



RAISED BOOM

ELECTRIC OVER HYDRAULIC CONTROLS RAISE THE BOOM FOR MANEUVERABILITY

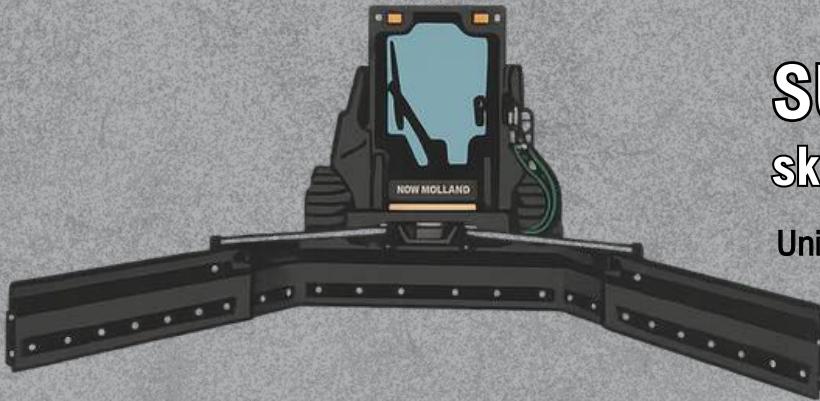

SUPERIOR SCRAPER

skid steer

Universal adapter plate with floating linkage

Specs	S814	S712	S610
Open width	14 ft	12 ft	10 ft
Closed width	8 ft	7 ft	6 ft
Hydraulic Connection	Flat face couplers; male tip pressure relieved for ease of connection		
Hydraulic Requirements	Single set of remotes	Single set of remotes	Single set of remotes
Weight	1,032 lbs	970 lbs	908 lbs
Height	22 inches	22 inches	22 inches
Scraping Edge	High Tensile Rubber, adjustable and reversible made in the USA		

SUPERIOR SCRAPER

3 Point & tractor mounts



Specs	S814
Open width	14 ft
Closed width	8 ft
Hydraulic Connection	Quick disconnect couplers. Plumbed Electric hydraulic valves
Hydraulic Requirements	Ties into hydraulic plumbing on tractor
Weight	1,032 lbs
Height	22 inches
Scraping Edge	High Tensile Rubber, adjustable and reversible made in the USA

FEED PUSHER



Specs

FPV8

Open width	8 ft 4 in
Closed width	8 ft
Hydraulic Requirements	N/A
Weight	698 lbs
Height	23 inches
Scraping Edge	High Tensile Rubber, adjustable & reversible made in the USA

Specs

Bedding Extractor

Cutting Width	24 inches
Cutting Depth	1 - 10 inches
Auger Diameter	24" x 18" tapered for stall clearance
Auger flighting scraper	Spring activated
Auger flight thickness	3/8 inch
Number of carbide tips	22
Rotary Auger Drive	Direct Drive Hydraulic Motor
Hydraulic requirements	Single set of remotes, 8 gpm
Skid Steer mount	Universal adapter plate
Auger Speed	Prest flow controlled
Auger torque	Pressure relieved at preset torque
Weight	830 lbs
Hydraulic couplers	Flat face couplers; male tip pressure relieved for ease of connection

BEDDING EXTRACTOR



MAT MATE

skid steer and side mount



Specs	Skid Steer & Side mount
Brush Diameter	36 inches
Rotary Brush Drive	Direct Drive Hydraulic Motor
Hydraulic Requirements	Single set of remotes, 7 gpm
Attachment of machine	Skid Steer universal adapter plate
Rotary Brush Speed	Preset flow controlled
Rotary brush torque	Pressure relieved at preset torque
Weight	675 pounds (skid)
Hydraulic Couplers	Flat face couplets; male top pressure relieved for ease of connection (skid)

Specs

Tractor Mount

Attachment of Machine	Category 1 hitch
Capacity	0.75 cubic yards
Scooping Function	Hydraulic tip for scooping into piles
Boom Arm	Hydraulic with breakaway shear bolt
Augers	Separate, adjustable flow
Controls	Electric operation
Dispensing Width	24 inches
Stone Discharge	Open auger for small stones

LIME DISPENSER

tractor mount



SANDMAN & SANDMAN LP skid steer




Specs	Sandman	Sandman LP
Overall Working length from aisle to curb	65 inches	65 inches
Rotary Arm Drive	Direct Drive Hydraulic Motor	Chain case driven 100 roller chain, oil bath
Rotary Arm	53 inches	53 inches
Hydraulic requirements	Single set of remotes, 8 gpm	Single set of remotes, 8 gpm
Number of shovels	4	4
Attachment of machine	Skid Steer universal plate	Skid Steer universal plate
Rotary arm speed	Preset flow controlled	Preset flow controlled
Rotary arm torque	Pressure relieved at preset torque	Pressure relieved at preset torque
Weight	675 lbs	855 lbs
Hydraulic Couplers	Flat face couplers; male tip pressure relieved for ease of connection	Flat face couplers; male tip pressure relieved for ease of connection
Curb Guide	Shoe, abrasion resistant steel	Shoe, abrasion resistant steel
Curb Scraper	Spring return, Reversible abrasion resistant steel	Spring return, Reversible abrasion resistant steel


Specs	Side Mount	Side Mount LP
Overall Working length from aisle to curb	65 inches	65 inches
Rotary Arm Drive	Direct Drive Hydraulic Motor	Chain case driven 100 roller chain, oil bath
Rotary Arm	53 inches	53 inches
Hydraulic requirements	8 gpm	8 gpm
Number of shovels	4	4
Attachment of machine	Bolted to tractor	Bolted to tractor
Rotary arm speed	Preset flow controlled	Preset flow controlled
Rotary arm torque	Pressure relieved at preset torque	Pressure relieved at preset torque
Curb Guide	Chain	Chain
Curb Scraper	Spring return, Reversible abrasion resistant steel	Spring return, Reversible abrasion resistant steel

SANDMAN & SANDMAN LP


side mount

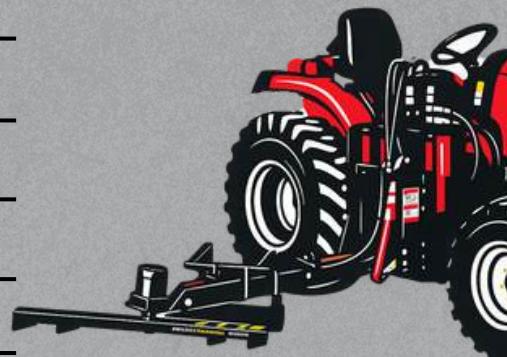


BEDDING EXTRACTOR

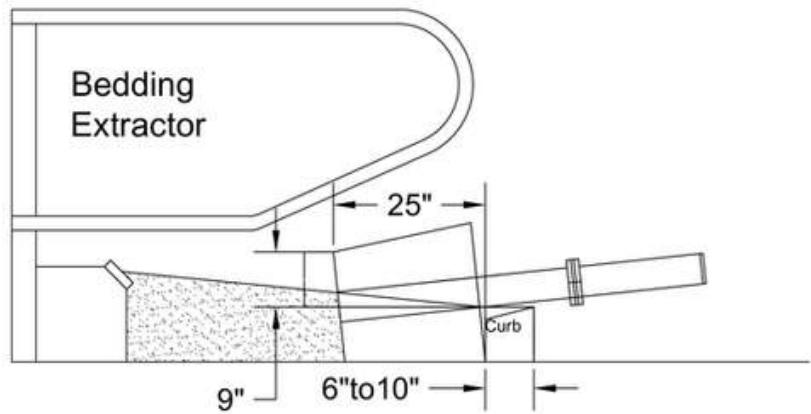


MAT MATE

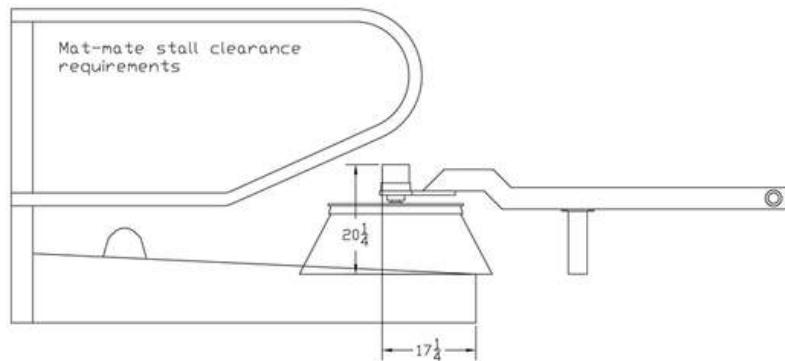

SANDMAN

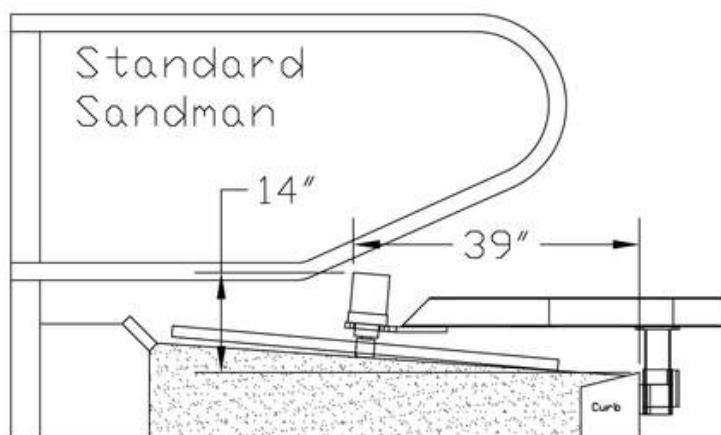


SANDMAN LP

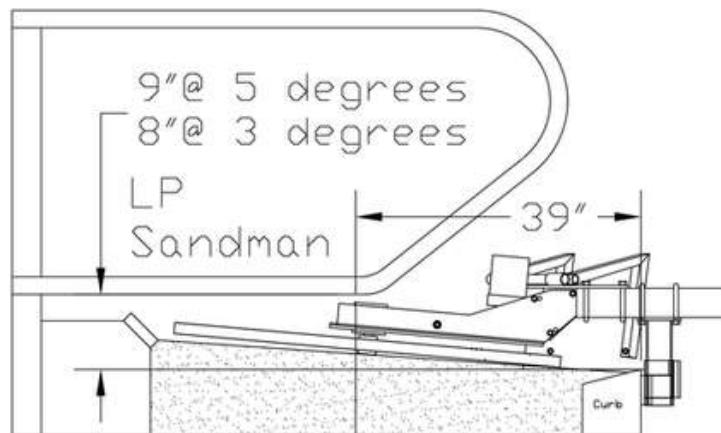

Superior Attachments Inc

N3522 US HWY 41
MENOMINEE, MI 49858
(800) 450-7292 (906) 864-1708
info@superiorattachments.com

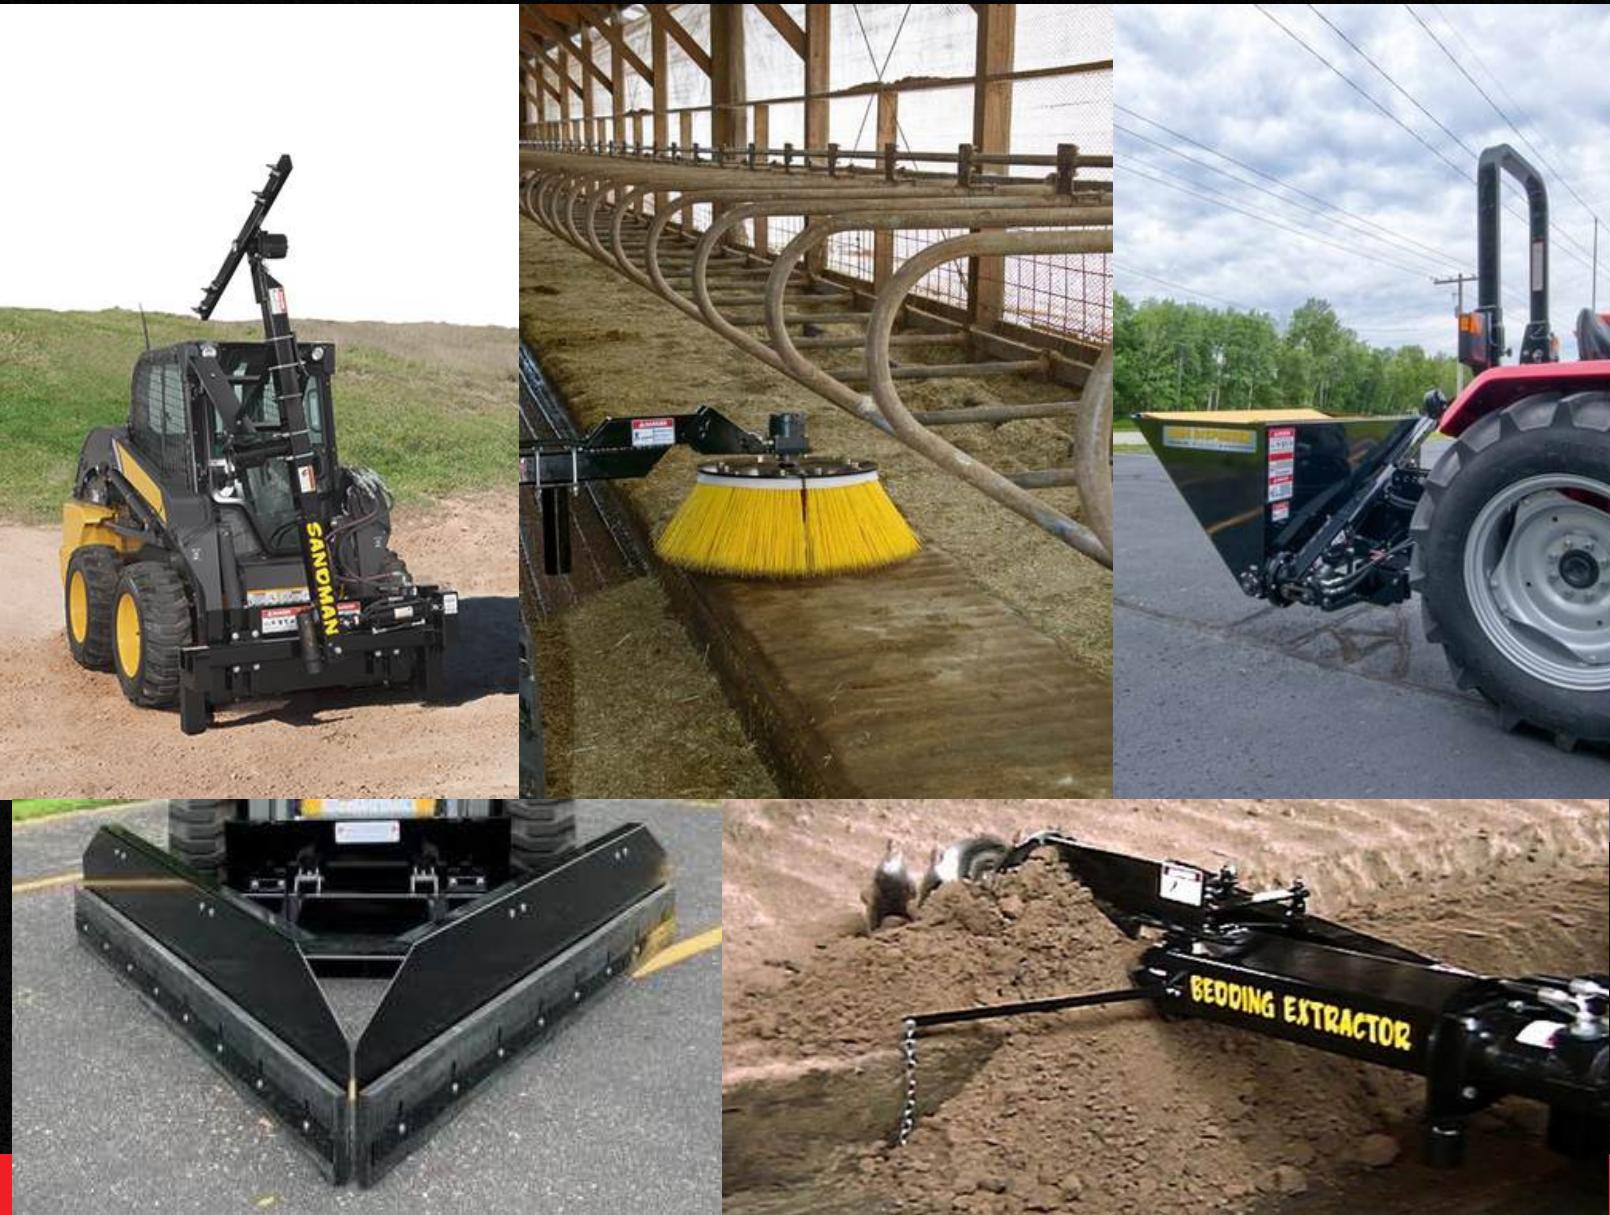

We are proud to provide dairymen with time proven and dependable management tools.

Finding the correct bedding management tools for your herd can be challenging.

Superior Attachments free stall bedding management tools are here to help. Engineered for consistency, our tools deliver reliable performance in sand, sawdust, compost, fiber, and digester solids bedding materials. The Sandman and Bedding Extractor are designed to help you with cow comfort and free stall bedding management.