


<b>Team Chat UI Components</b>	<b>2</b>
Top-Level Components	2
Login	2
MyUser	3
MyGroupChannels	3
MyDirectChannels	4
User Components	6
User	6
UserList	7
Channel Components	7
Channel	7
DirectChannel	8
GroupChannel	8
ChannelList	9
Selected Channel	10
SelectedChannel	10
ChannelHeader	11
MemberStatus	12
Message Components	12
MessageList	12
Message	13
MessageInput	14
TextMessageEditor	14
TypingIndicatorsDisplay	14
EmojilInput	15
Members Components	15
MemberList	15
Member	16
Other	17
UserAvatar	17
NetworkStatus	17
TextArea	17
<b>Support Chat Components (User View)</b>	<b>18</b>
NewConversations	18
User	19

SelectedDirectChannel	19
MessageList	20
Message	21
Message Input	22
<b>Support Chat Components (Agent View)</b>	<b>23</b>
MyDirectChannels	23
DirectChannel	24
SelectedDirectChannel	25
MessageList	26
Message	27
Message	27
Message Input	28
EditToolbar	28
InfoPanel	29
User	30
UserAvatar	30
Timeline	31
Ticket	31

# Team Chat UI Components


## Login Screen

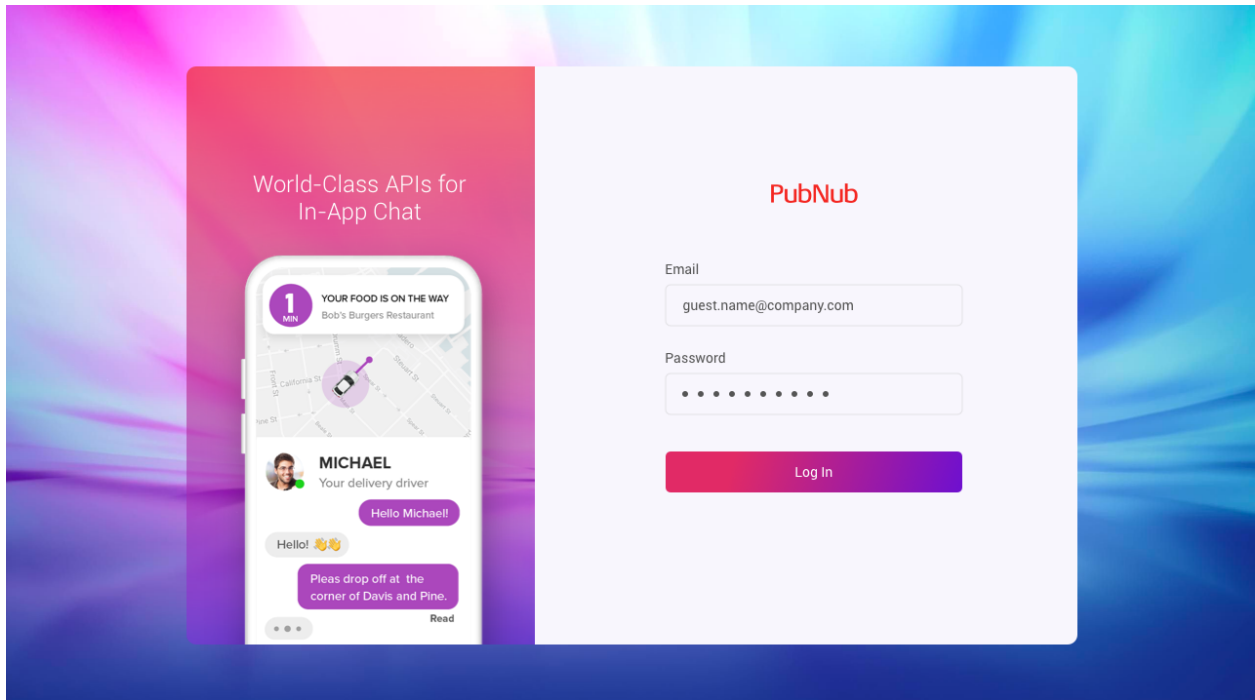

## Login

Prop name	Type	Default	Description
username	union		Username of the user
password	string		Password of the user
loginButton	func		A button to login to the application
companyLogo	image		A logo of the company that powers the app

# App Screen

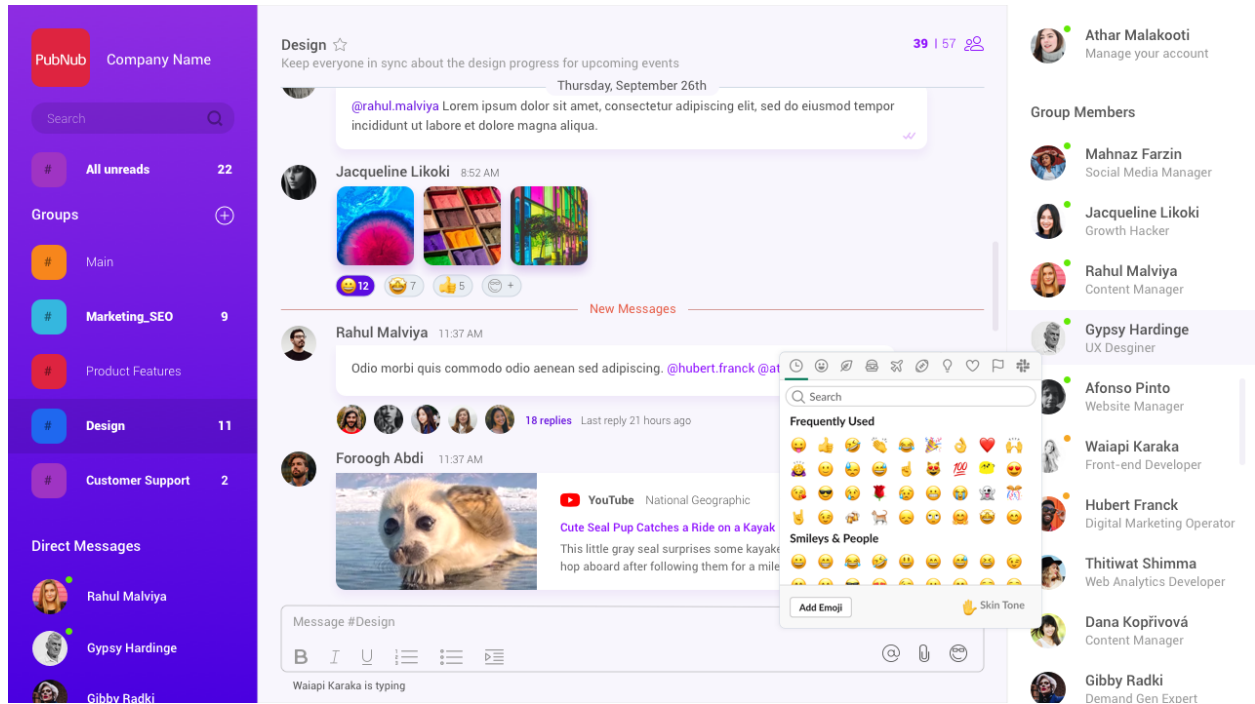

## leftPanel

Prop name	Type	Default	Description
pn_logo			
search			
MyGroupChannels	union		
MyDirectChannels	union		

## MyGroupChannels

The component displays a list of group channels the user has joined, and handles leaving and selecting rooms.

Prop name	Type	Default	Description
List	union		Custom UI component to display list of the channel that the user is a part of.
joinChannels	func		

leaveChannel	func		
type	string		type = group
filter	object		
sort	object		
default	string		The default channel that is selected upon app load.
selected	string		The channel that is currently selected on the view.

### Channel

Prop name	Type	Default	Description
channel	string		Custom UI component to display list of the channel.
name	string		Name of the channel
description	string		Description of the channel
image	image		Profile image of the channel
userAvatar	union		Shows details of the user who is the sender of the messages on this channel.
unreadMessages	boolean		Set to true if the channel has unread messages.
unreadCount	number		Count of unread messages
Message	union		Shows the last message sent on this channel.
type	string		all, direct, group, starred


### MyDirectChannels

The component displays a list of group channels the user has joined, and handles leaving and selecting rooms.

Prop name	Type	Default	Description
List	union		Custom UI component to display list of the channel that the user is a part of.

joinChannels	func		
leaveChannel	func		
type	string		type = direct
filter	object		
sort	object		
default	string		The default channel that is selected upon app load.
selected	string		The channel that is currently selected on the view.

## joinChannels

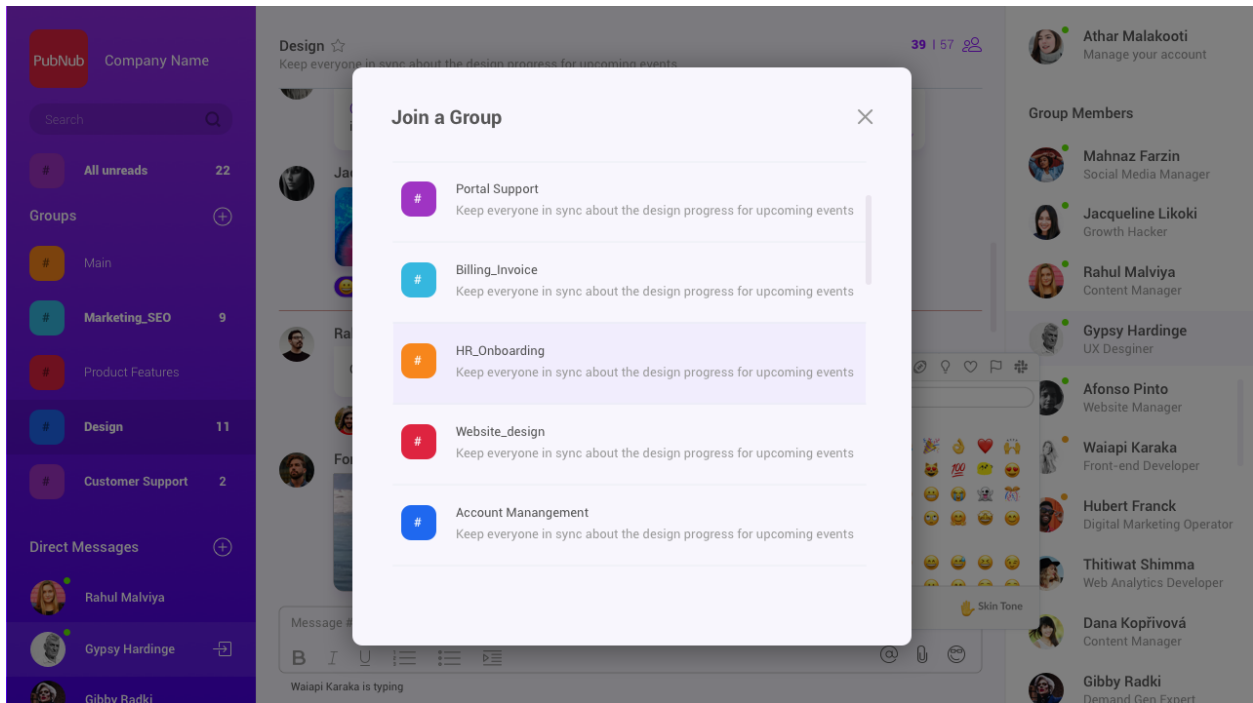

## ChannelList

Prop name	Type	Default	Description
List	union		Custom UI component to display list of the channel.
type	string		all, direct, group, starred

filter	object		
sort	object		
default	string		The default channel that is selected upon app load.
selected	string		The channel that is currently selected on the view.
sort	object		

## centerPanel

Prop name	Type	Default	Description
ChannelHeader	union		
memberStatus	union		
MessageList	union		
MessageInput	union		
typingIndicator	union		

## ChannelHeader

The component shows basic information about a channel, and is used in the top bar and overlay.

Prop name	Type	Default	Description
channel	string		Custom UI component to display list of the channel.
name	string		
description	string		
image	string		
size	number		
memberStatus	union		

## MemberStatus

The component retrieves on/offline information and displays room occupancy.

Prop name	Type	Default	Description
countTotalMembers	number	0	
countOnlineMembers	number	0	
showInfo	func		

### MessageList

The component shows all the messages in a room using the `Message` component.

Prop name	Type	Default	Description
List	union		List for Message UI component
sort	object		
filter	object		

### Message

The Message component shows the content, sender, and time of a message in the list.

Prop name	Type	Default	Description
key	string		unique id for the message. Typically the same as the message timetoken.
UserAvatar	union		UI component to show the avatar for the sender
timetoken	string		publish timestamp of the message
sender.id	string		id of the sender
sender.name	string		name of the sender
dateFormat	string		
filter	object		

### MessageInput

The component accepts text and emoji, and is built when we handle sending messages.

Prop name	Type	Default	Description
EmojiSuggestion			
TextArea			



EmojiInput			
message	string		unique id for the message. Typically the same as the message timetoken.
sendDraft	union		UI component to show the avatar for the sender
updateDraft			

### TextArea

Prop name	Type	Default	Description
ref	object		
rows	number		
value	string		
onChange	func		
onKeyPress	func		
placeholder	string		

### EmojiInput

Prop name	Type	Default	Description
Picker	union		
EmojiButton	string		

### TypingIndicator

The `TypingIndicatorDisplay` displays information about which users are typing in a channel.

Prop name	Type	Default	Description
sender.id	string		id of the sender
sender.name	string		name of the sender
timetoken	string		
message	string		the text to display on the UI when a user is typing

## rightPanel

### MyUser

The component displays the profile information for the person using the app, and a `NetworkStatus` component for their connection.

Prop name	Type	Default	Description
UserAvatar	union		Avatar UI component to display details of the user.
UserAvatar.name	string		name of the user
UserAvatar.custom	object		custom object to hold additional properties of the user
UserAvatar.custom.title	string		title of the user
UserAvatar.image	image		profile image for the user
NetworkStatus	union		NetworkStatus UI component to indicate if the user is connected to the app.

### NetworkStatus

The `NetworkStatus` component shows whether the app is connected.

Prop name	Type	Default	Description
isConnected	boolean		

### MemberList

Prop name	Type	Default	Description
List	union		A list of member components
sort	string		
filter	string		

### Member

The MemberDescription component shows a user's profile picture, name, job title, and on/offline status.

Prop name	Type	Default	Description
key	string		unique identifier for the user
UserAvatar	Union		
name	string		name of the user
title	string		
presence	boolean		

## Other

### User

The user component shows a user's profile picture, name, job title, and on/offline status.


Prop name	Type	Default	Description
key	string		unique identifier for the user
UserAvatar	Union		
UserAvatar.name	string		name of the user
UserAvatar.title	string		
presence	boolean		

### UserAvatar


Prop name	Type	Default	Description
userId	string		unique identifier for the user
name	string		name of the user
muted	boolean	false	
image	string		A profile image of the user
custom	object		An object that holds custom properties for the user.
custom.title	string		
custom.company	string		

color	string		
size	number	56	

## Support Chat Components (User View)

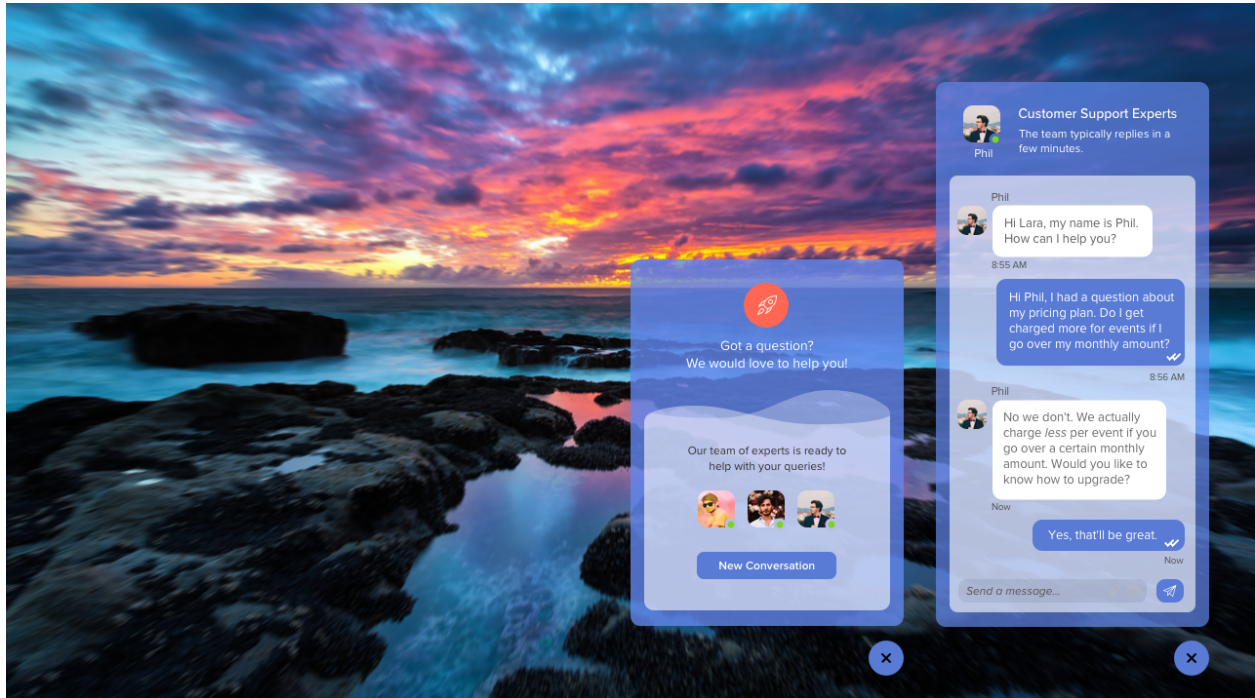

## NewConversations

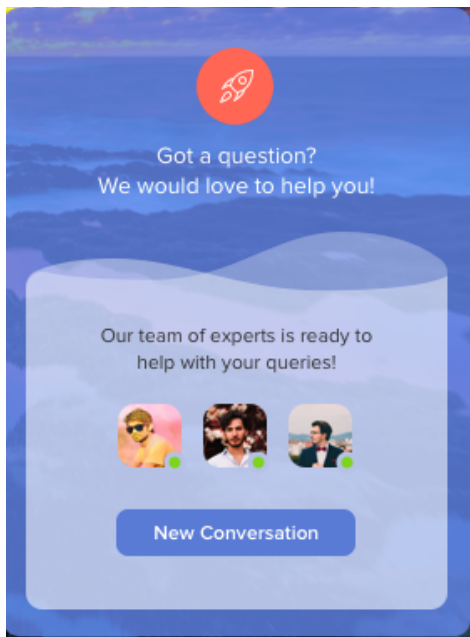


Prop name	Type	Default	Description
companyLogo	string		A unique identifier for the channel
users	union		Shows a list of agents available to start a conversation.
newConversation	button		

## User

The user component shows a user's profile picture, name, job title, and on/offline status.

Prop name	Type	Default	Description
key	string		unique identifier for the user
userAvatar	union		
userAvatar.name	string		name of the user
userAvatar.image	string		
presence	boolean		

## SelectedChannel

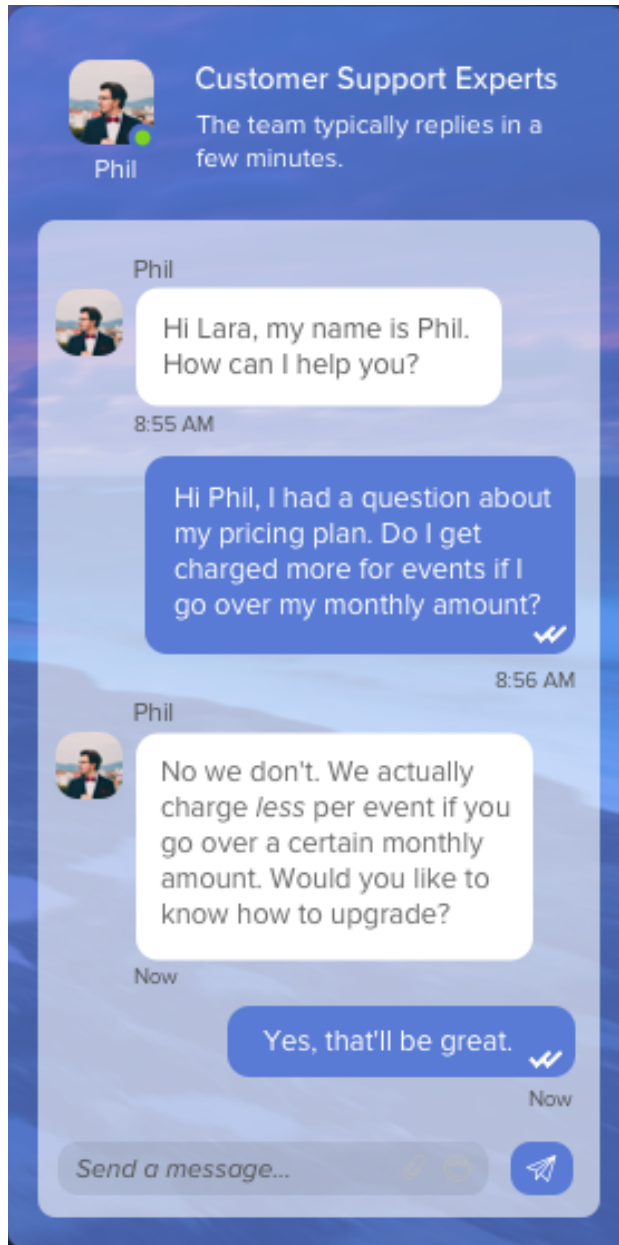

Prop name	Type	Default	Description
channel	string		
MessageList	union		
assignedTo	union		Populated from the User Avatar UI Component

assignedTo.name	string		
status	list		

## MessageList

Prop name	Type	Default	Description
List	union		List for Message UI component
MessageInput			
sort	object		
filter	object		

## Message

The Message component shows the content, sender, and time of a message in the list.

Prop name	Type	Default	Description
key	string		unique id for the message. Typically the same as the message timetoken.
UserAvatar	union		UI component to show the avatar for the sender
timetoken	string		publish timestamp of the message
sender.id	string		id of the sender
sender.name	string		name of the sender
receipt.delivered	boolean		
receipt.read	boolean		
dateFormat	string		
filter	object		

## Message Input

Prop name	Type	Default	Description
TextArea	string		
placeholderText	string		

send	button		
------	--------	--	--

## Support Chat Components (Agent View)

The screenshot shows a support chat interface with the following components:

- Left Panel:** A list of chat channels with columns for name, status, and time. The selected chat is for Laura Taylor (Blue Footware).
- Central Chat Window:** A conversation with Phil Byrne. It shows a message from Shirline Dungey, a system message about assignment, and a message from Phil Byrne. The chat is currently assigned to Phil Byrne.
- Right Panel:** Visitor information for Laura Taylor, including company (Bethesda, Inc.), email, and location (Tokyo, Japan). It also displays metrics: 24 Past visits, 5 Past chats, and 5m 12s Time on site. A timeline of recent events is also visible.

leftPanel

MyDirectChannels

Prop name	Type	Default	Description
List	union		Custom UI component to display list of the channels that the user is a part of.
joinDirectChannels	func		
leaveDirectChannel	func		
type	string		type = direct
filter	object		
sort	object		
selected	string		The channel that is currently selected on the view.



## DirectChannel

Prop name	Type	Default	Description
channel	string		A unique identifier for the channel
sender	union		Populated from the UserAvatar UI Component
sender.name	string		
sender.image	string		
sender.custom.comp any	string		
unreadMessages	boolean		Set to true if the channel has unread messages.
unreadCount	number		Shows the count of unread messages in the channel.
lastMessage	union		Populated from the Message UI Component
lastMessage.text	string		
lastMessage.duration	number		

## centerPanel

Prop name	Type	Default	Description
channelHeader	union		
MessageList	union		
MessageInput	union		

## ChannelHeader

Prop name	Type	Default	Description
assignedTo	union		Populated from the User Avatar UI Component

assignedTo.name	string		
status	list		

## MessageList

Prop name	Type	Default	Description
List	union		List for Message UI component
MessageInput			
sort	object		
filter	object		

## Message


The Message component shows the content, sender, and time of a message in the list.

Prop name	Type	Default	Description
key	string		unique id for the message. Typically the same as the message timetoken.
text	string		Text of the message
UserAvatar	union		UI component to show the avatar for the sender
timetoken	string		publish timestamp of the message
sender.id	string		id of the sender
sender.name	string		name of the sender
receipt.delivered	boolean		
receipt.read	boolean		
dateFormat	string		
filter	object		

## Message Input

Prop name	Type	Default	Description
TextArea	string		

send	button		
sendPrivate	button		
editToolbar	union		

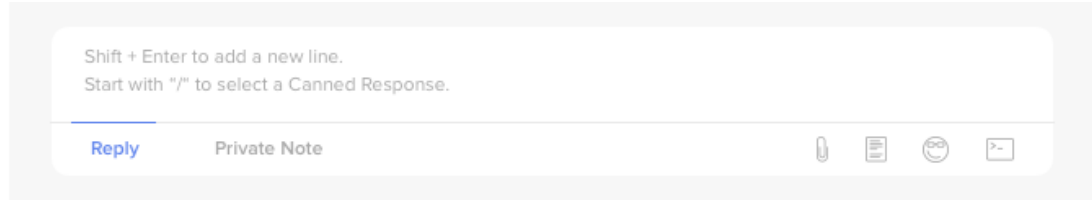

### EditToolbar

Prop name	Type	Default	Description
addAttachments	button		
addEmojis	button		
addMarkdown	button		

### InfoPanel

Prop name	Type	Default	Description
User	union		
Timeline	union		

### User

Prop name	Type	Default	Description
id	string		unique identifier for the user
userAvatar	Union		
userStatus	boolean		

### UserAvatar

Prop name	Type	Default	Description
name	string		name of the user
email	string		

company	union		
company.name	string		
company.location	string		
title	string		
color	string		
size	number	56	

## Timeline


Prop name	Type	Default	Description
Tickets	list		A list of tickets

## Ticket

Prop name	Type	Default	Description
id	string		
name	list		
status	string		
created	date		
modified	date		
logo			

# Live-Event Chat Components

## Login Screen

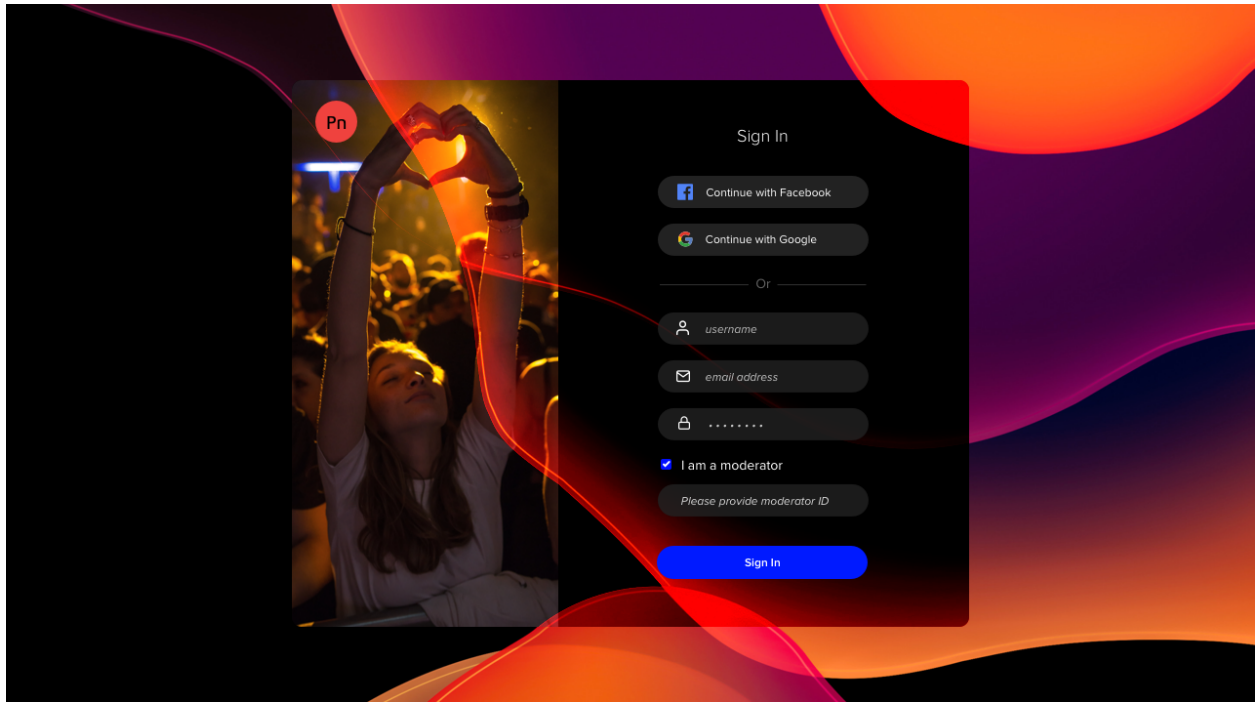


## Login

Prop name	Type	Default	Description
username	string		Username of the user
email	string		Email of the user
password	string		Password of the user
moderator	boolean		Checked if the user logging in is Moderator
moderator_code	string		A code making giving a login Moderator power
loginButton	func		A button to login to the application
loginFBButton	func		Login as FB user using FB credentials

loginGoogleButton	func		Login as Google user using Google credentials
companyLogo	image		A logo of the company that powers the app

## Events Screen

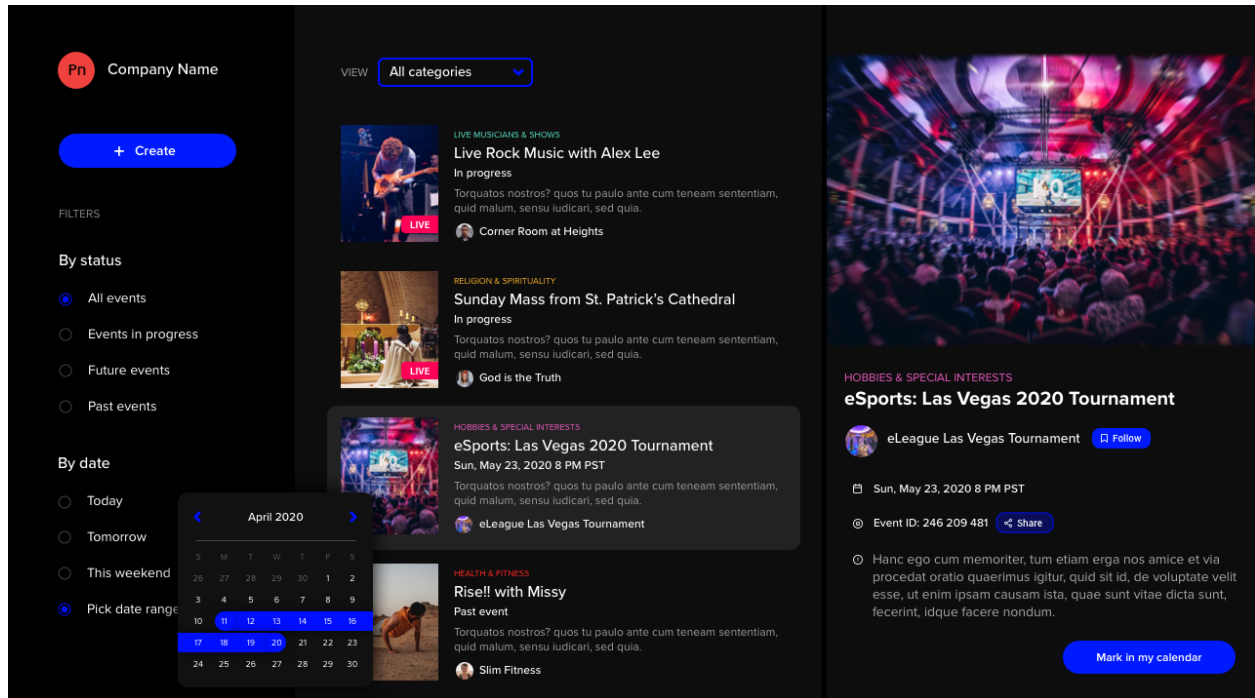

## EventList

Prop name	Type	Default	Description
List	union		A list of Event components
filterByDate	object		All/Past/InProgress/Future
filterByStatus	object		Today/Tomorrow/WeekEnd/DateRange
selected	string		The id of the event that is currently selected on the view.

## EventDescription


Prop name	Type	Default	Description
event	union		Event component for the event

share	func		
follow	func		
join	func		
add_to_calendar	func		

## Event

Prop name	Type	Default	Description
id	string		Id of the event
name	string		Name of the event
description	string		Description of the event
image	image		Profile image of the event
host	union		userAvatar component that represents the host of the event.
status	string		Expired, Active, Planned
start_date	datetime		
length	datetime		How long the event lasts.
category	string		all, direct, group, starred

## Current Event Screen

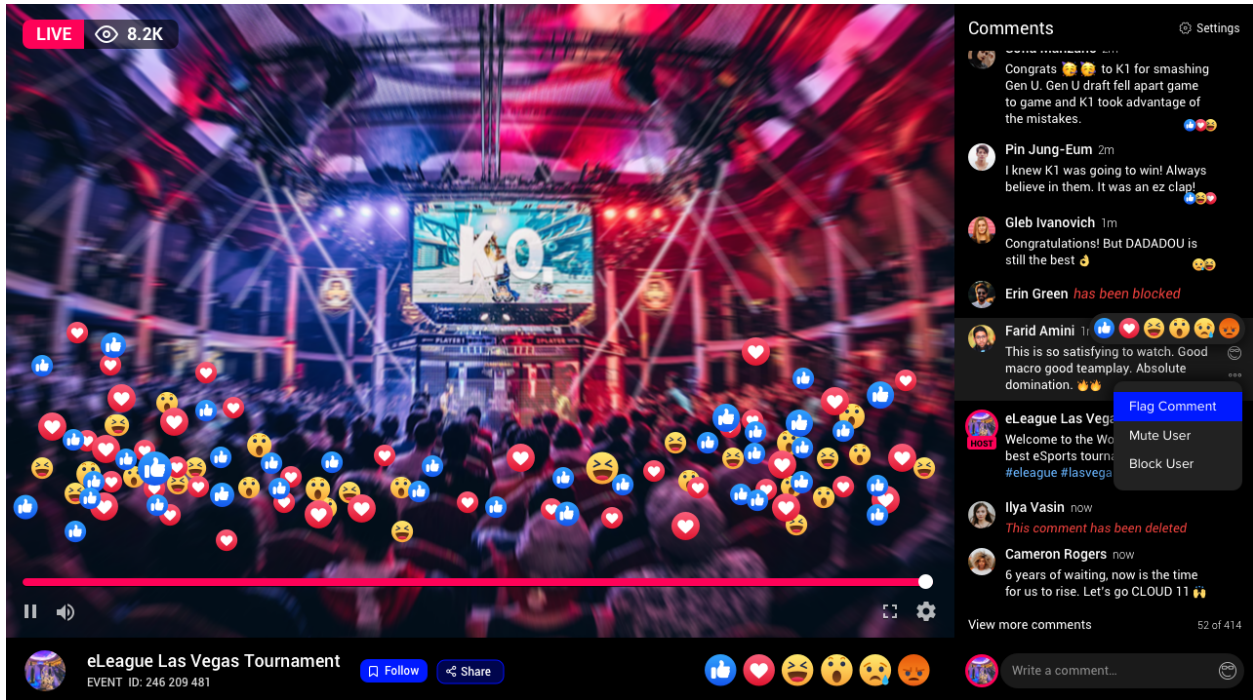

## Stream

Prop name	Type	Default	Description
screen	union		
pause	func		For now handled by the stream provider UI
volume	func		For now handled by the stream provider UI
screen_settings	func		For now handled by the stream provider UI
full_screen	func		For now handled by the stream provider UI
width	number		
length	number		
presence_occupancy	number		Number of participants.

## EventDetails

Prop name	Type	Default	Description
-----------	------	---------	-------------



Event	union		
addStreamReactions	func		

## Chat

### MessageList

Prop name	Type	Default	Description
List	union		List for Message UI component
MessageInput			
sort	object		
filter	object		

### Message

Prop name	Type	Default	Description
key	string		unique id for the message. Typically the same as the message timetoken.
UserAvatar	union		UI component to show the avatar for the sender
timetoken	string		publish timestamp of the message
sender.id	string		id of the sender
sender.name	string		name of the sender
dateFormat	string		
reactions	list		A list of reactions attached to the message.
addMessageReaction	func		
addActions	func		
message	string		The content of the message.

### UserAvatar

Prop name	Type	Default	Description
userId	string		unique identifier for the user

name	string		name of the user
muted	boolean	false	
image	string		A profile image of the user
custom	object		An object that holds custom properties for the user.
custom.title	string		
custom.company	string		
color	string		
size	number	56	

### MessageInput

Prop name	Type	Default	Description
TextArea	union		
EmojiInput	union		
message	string		unique id for the message. Typically the same as the message timetoken.

### TextArea


Prop name	Type	Default	Description
ref	object		
rows	number		
value	string		
onChange	func		
onKeyPress	func		
placeholder	string		

### EmojiInput

Prop name	Type	Default	Description
Picker	union		

EmojiButton	string		
-------------	--------	--	--

## Settings Screen

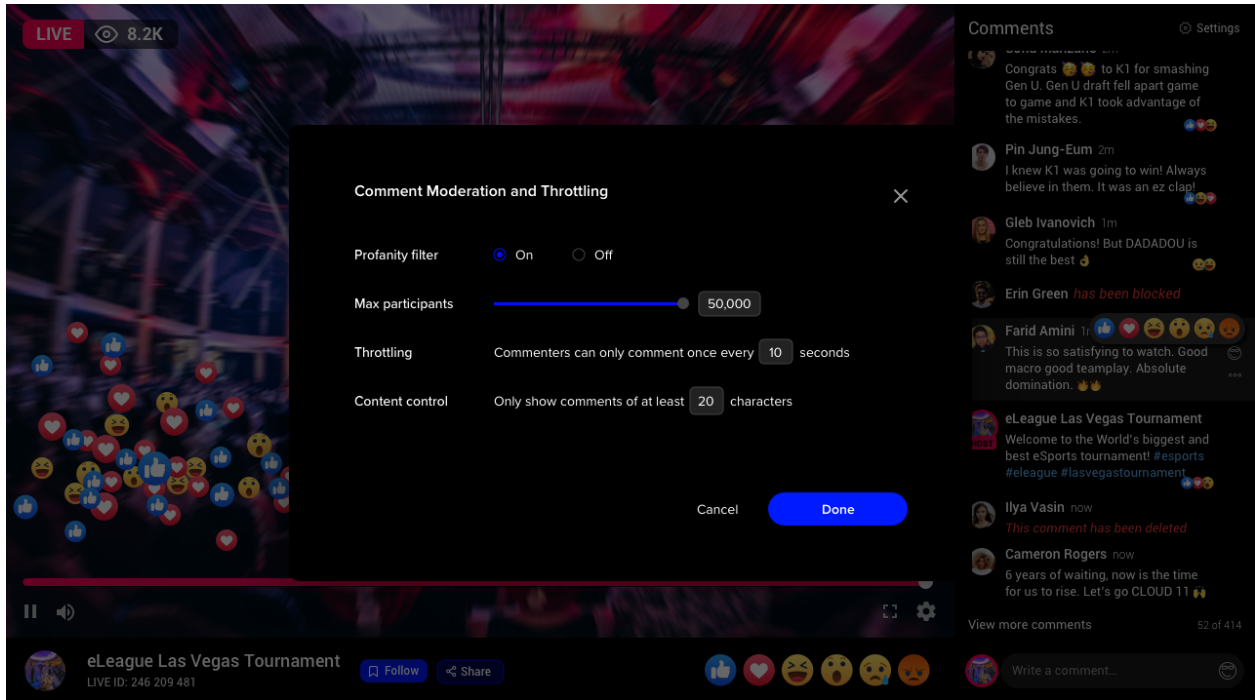

## Settings

Prop name	Type	Default	Description
profanity	boolean		
max_participants	number		
throttling	number		
content_limit	number		
cancel	func		
done	func		