



Available with
Black Housing

Specifications:

Lumens:	1000+ (white)
CCT:	5000K
CRI:	70+
Voltage:	10-30vDC
Rated Watts:	16
IP Rating	IP67
Housing	Powder Coated Die-Cast Aluminum

Key Features:

- Dual-color with dimming, no external controllers required.
- Die-cast aluminum construction, certified ignition protected.
- Completely water sealed and IP67 compliant.
- Low profile with 180° beam pattern.
- Easy Installation – simple 2-wire hook up.
- Beautiful contoured design with improved thermal efficiency.
- Over 2,000+ hour of rigorous ASTMB-117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

Ibiza LED Engine Room Light

As beautiful as it is brilliant, you may be surprised that Ibiza is tough enough for an engine room. But it is. And it's just as bright, reliable, and easy to install as it's sibling, the wildly popular Nevis. Delivering 1,000 integrating-sphere-measured lumens and dual-color output options, Ibiza is IP67 compliant, completely sealed and compatible with most PWM LED dimmers. And like Nevis, Ibiza's carefully engineered optical system delivers a nearly perfect 180-degree beam pattern to illuminate even the farthest, darkest corners.

Product Details:

SKU	COLOR OUTPUT	HOUSING	CRI*	CCT*	VOLTAGE	12VDC	24VDC	LUMENS†
101520	White Non-Dimming	White	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101521	White, Red, Dimming	White	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101522	White, Blue, Dimming	White	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101532	White Non-Dimming	Black	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101533	White, Red, Dimming	Black	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101534	White, Blue, Dimming	Black	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)

* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

Features:



Lumen Output



Timed Toggle Protocol



Third Party Dimmer



Color Match Commitment



Ignition Protected





2-Wire Hookup



Dimming



3 Year Warranty

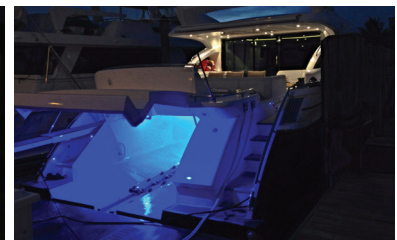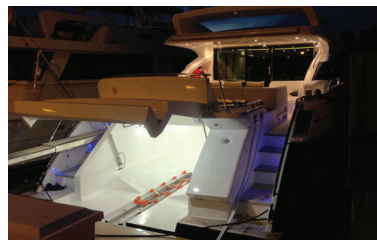

Certifications:



IP Rated



European Conformity

Ph. + (561) 272-9840 | lumiteclighting.com


Beam Pattern:

Ibiza- LED Engine Room Light

Ibiza- Beam Pattern

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7ft	169 fc	3.5 ft	4.3 ft
3.3ft	44.9 fc	6.7 ft	8.4 ft
5.0ft	19.6 fc	10.2 ft	12.7 ft
6.7ft	10.9 fc	13.7 ft	17.0 ft
8.3ft	7.10 fc	17.0 ft	21.1 ft
10.0ft	4.89 fc	20.4 ft	25.4 ft
■ Vert. Spread: 91.2° ■ Horiz. Spread: 103.6°			

Illuminance at Distance

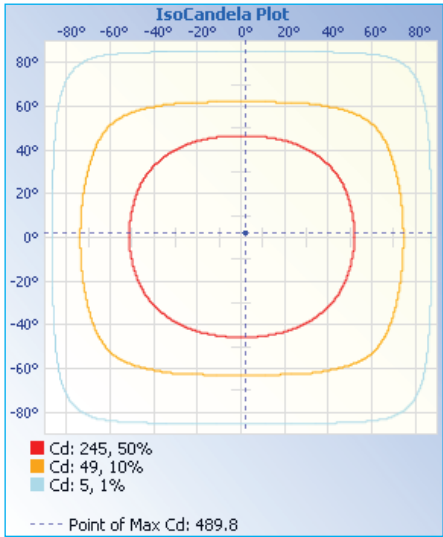

Iso Candela Plot

Dimensions:

Width:	9 in (22.81 cm)
Height:	2 in (5.06 cm)
Depth:	1 in (2.54cm)

