

SPECTRA VENTURA 200c WATERMAKER

PRODUCT SPECIFICATIONS

Production / Day	200 gal (757 l)
Production / Hour	8.3 gal (31 l)
Power Requirement	12v DC 10A / 24v DC 5A 14.5 Watts/1 gal 4 Watts/1 liter
Weight	85 lbs (38.6 kg)
Pre Filters	2.5"x10" pleated polyester 5 micron 2.5"x10" pleated polyester 20 micron
Controls	Spectra Connect Remote Controller
Installation Requirements	Dedicated thruhull, dry and well ventilated area not to exceed 110°F/37°C
Membranes	20" x 2.5" High rejection spiral wound polyamide
Pump and Motor	Shurflo diaphragm pump
Salt Rejection	99.2%
Temperature Range	Max 110°F/37°C Min 36°F/2°C
Baseline Conditions	33,000 PPM feed water at 77°F/25°C
pH Range	3-11 (typical seawater pH is 8)
Chlorine Tolerance	0 PPM
Warranty	Spectra standard warranty
Shipping Weight	85 lbs (38.5 kg)
Shipping Dimensions	33"x25"x19" 84cm x 64cm x 49cm




FACTS

The same size as the Ventura 150c, but designed for warm water above 50°F (10C), the Ventura 200c delivers over 8 gallons (31 liters) per hour. With its modular design, it's an ideal system for installation in tight spaces whether you're cruising or racing. The Ventura 200c features the new Spectra Connect controller, which allows you to operate and monitor your watermaker from a remote device. Spectra Connect also has new added features like the Fill Tank mode, or a customizable Auto Run mode, One-Touch Sensor Calibration, and suggested maintenance intervals displayed on the dashboard. Add the Z±ION Membrane Protection System to extend storage times for up to 30 days.

FEATURES

- Completely automated with the Spectra Connect Controller
- Compact modular design
- Spectra's unique Clark Pump for efficiency and reliability
- Low power consumption, can be run on batteries, solar, or wind power
- Whisper quiet
- Commercial grade diaphragm pumps with run dry protection
- System includes installation kit, handheld water quality tester, and product sample valve
- Z±ION Compatible
- Remote Display

SPECTRA VENTURA 200c WATERMAKER

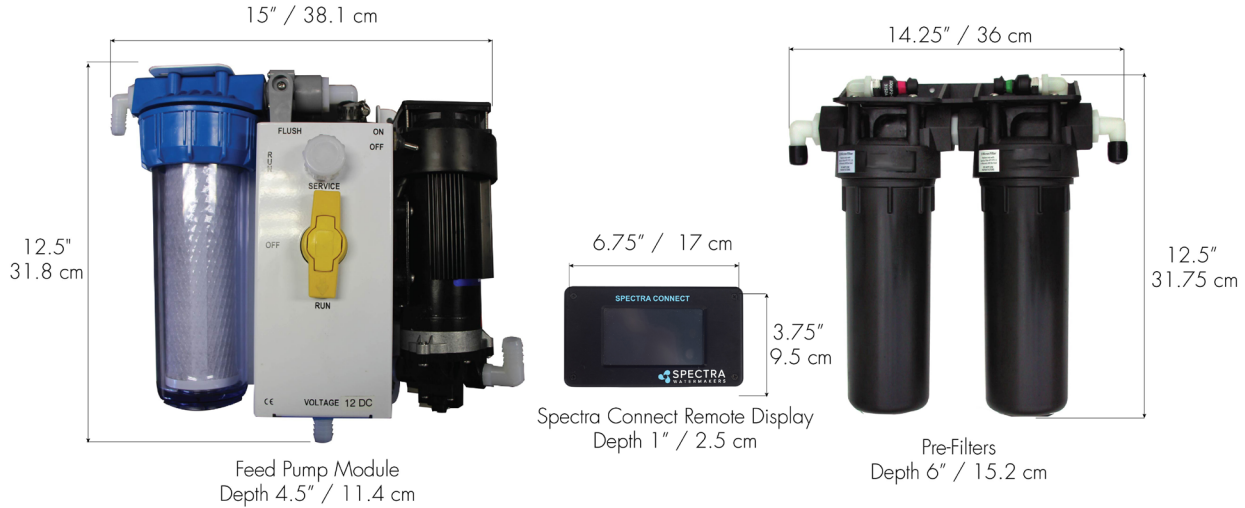

Optional Components



Katadyn reserves the right to modify products

UK Distributor:

Global Distribution Solutions Ltd (GDS Ltd)

Address: PO Box 214, Plymouth, PL1 9GB, UK

Tel: +44 330 1333 030

E-mail: info@gds.limited

Web: www.gds.limited