



ROTOWHEEL

WHEELS RIMS TYRES AXLES



WHEELS

PRODUCT CATALOGUE

STEEL WHEELS • SUPER SINGLE WHEELS • STEEL LOW LOADER WHEELS
STEEL BUS/TRUCK WHEELS • ALUMINIUM WHEELS



WHEEL SPECIFICATION **5**

15 DEGREE WHEELS **6**

For high-speed use on trucks & trailers

INDUSTRIAL WHEELS **7**

For slow speed use on industrial fork-lift trucks & trailers

EARTHMOVER RIMS **8**

5-PIECE EARTHMOVER RIMS **9**

AGRICULTURAL WHEELS **10**

ROWCROP NARROW WHEELS **14**

For use on agricultural tractors & sprayers

HIGH SPEED TRAILER & CARAVAN **15**

Wheel data

FIXED AND ADJUSTABLE WHEEL **16**

Fitment guide




Tractors W and DW Wheels



WHEEL
SIZES

W – Profile

W11 – 15L*24
W11 – 15L*28
W13 – W15L*30

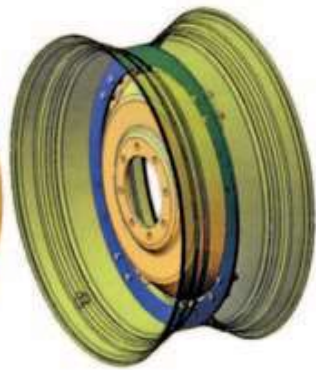

WHEEL
SIZES

DW – Profile

DW16 – 25A*26	DW14 – 18L*34
DW16L – DW20A*28	
DW20A – 24A*34	
DW15L – 20A*30	DW12 – 28A*38
DW20A – 27A*32	
DW16L – DW25A*42	

Trailers, Heavy Duty Machines 15 Degree Wheels



WHEEL
SIZES

15 Degree Wheels

13.00 – 24.00*22.5
20.00 – 28.00*26.5
20.00 – 28.00*30.5



WHEEL
SIZES

Row Crop

W8 – W10*32	W10 – DW16*46
W8 – W10*36	W8 – W12*48
W8 – W10*44	W10*52



15 DEGREE WHEELS

FOR HIGH-SPEED USE ON TRUCKS & TRAILERS



Rim Size	Possible Tyre Fitments	Spec.	Stud Hole Type	Offset	Max Load (kg)
600 x 17.5	205/65R17.5, 215/75R17.5	6/205/161	c/sink or spigot	130	1900
600 x 17.5	205/65R17.5, 215/75R17.5	8/275/221	c/sink	135	1900
600 x 17.5	205/65R17.5, 215/75R17.5	10/225/176/26	c/sink	135	2100
6.75 x 17.5	205/75R17.5, 225/75R17.5	10/225/176	c/sink or spigot	140	2725
	235/75R17.5, 245/70R17.5	10/225/176	c/sink or spigot	140	2725
		8/275/221	c/sink or spigot	135	22300
7.50 x 19.5	245/70R19.5, 265/70R19.5	8/275/221/24	spigot	140	2650
	265/70R19.5	8/275/221/27	c/sink	140	2650
		10/225/176		140	2800
8.25 x 19.5	285/70R19.5	8/275/221/24	spigot	152	3000
		8/275/221/27	c/sink	152	3000
		10/225/176	c/sink or spigot	152	3100
13.00 x 19.5	425/55R19.5	8/275/221/24	c/sink or spigot	0	5500
	435/50R19.5	10/335/281/26	c/sink or spigot	0	5500
14.00 x 19.5	425/45R19.5	8/275/221/24	spigot	0	5500
	425/65R19.5	10/335/281/26	spigot	0	5000
6.75 x 22.5	225/70R22.5, 10R22.5	8/275/221	c/sink or spigot	145	
		10/335/281	c/sink or spigot	145	
7.50 x 22.5	11R22.5	10/335/281/27	c/sink or spigot	152	3300
	275/70R22.5, 275/80R22.5	10/335/281/25.4	c/sink 1" BSF	152	330
		10/335/281/26	c/sink or spigot	152	3300
8.25 x 22.5	295/60R22.5, 295/80R22.5	10/335/281/26	c/sink or spigot	160	3400
	12R22.5	8/285220	c/sink or spigot	160	
9.00 x 22.5	315/70R22.5, 315/80R22.5	10/335/281/26	c/sink or spigot	172	4000
11.75 x 22.5	385/65R22.5, 385/55R22.5	10/335/281/26	c/sink or spigot	0	4500
	385/65R22.5, 385/55R22.5	10/335/281/CS	c/sink BSF	-70	4500
	385/65R22.5, 385/55R22.5	10/335/281/26	spigot	120	4500
	385/65R22.5, 385/55R22.5	10/335/281		135	4500
13.00 x 22.5	425/65R22.5	10/335/281	c/sink or spigot	0	5700
14.00 x 22.5	445/65R22.5	10/335/281	c/sink or spigot	0	5800
8.24 x 24.5	305/75R24.5	10/335/281	spigot	0	Please enq.

FOR SLOW SPEED USE ON INDUSTRIAL FORK-LIFT TRUCKS & TRAILERS

Wide range of Industrial wheels and rims
available with or without discs. Plus tyres to fit.

Suitable for pneumatic or solid tyres

Rim Size	Tyre Size	Description
4.33R - 8	18 x 7-8, 500 x 8	Multi-Piece
4.00E - 9	600 x 9	Multi-Piece
4.00E - 9	600 x 9	Divided
5.00E - 10	650 x 10	Multi-Piece
5.00S - 12	700 x 12	Multi-Piece
8.00 - 12	23 x 10-12, 27 x 10.00-12	Multi-Piece
5.5 - 15	700 x 15, 750 x 15	Multi-Piece
6.0 - 15	750 x 15, 825 x 15	Multi-Piece
6.5 - 15	700 x 15, 750 x 15	Multi-Piece
7.0 - 15	815 x 15, 28 x 9-15, 825 x 15	Multi-Piece
7.5 - 15	250 x 15, 1000 x 15	Multi-Piece
8.0 - 15	300 x 15	Multi-Piece
9.75 - 15	28 x 12.5-15, 32 x 12.1-15	Multi-Piece
6.5 - 20	825 x 20, 900 x 20	Multi-Piece
7.0 - 20	900 x 20, 1000 x 20	Multi-Piece
7.5 - 20	1000 x 20	Multi-Piece
8.0 - 20	1000 x 20, 1200 x 20	Multi-Piece
8.5 - 15	1200 x 20	Multi-Piece
10.00 - 20	1400 x 20	Multi-Piece
8.5 - 24	1200 x 24	Multi-Piece
10.00w - 24	14.00 x 24	Multi-Piece
11.25 - 25	1600 x 25	Multi-Piece



DIVIDED WHEEL



LOCK-RING WHEEL



3 Piece Wheel Assemblies



12.00-25/1.3
14.00-25/1.5
17.00-25/1.7
19.50-25
22.0-25
25.0-25



4 Piece Wheel Assemblies


8.5-24 - fits 12.00-24 ,13.00-24, 1tyres

10.00-24 - fits 14.00-24 tyres

Four piece rim assembly includes Lock ring, Loose flange, advance band and rim base.





Key Type driver
for Heavy
applications



simple Notched gutter
driver -max pressure
65psi

2 different types of Drivers are available
key-type and notched

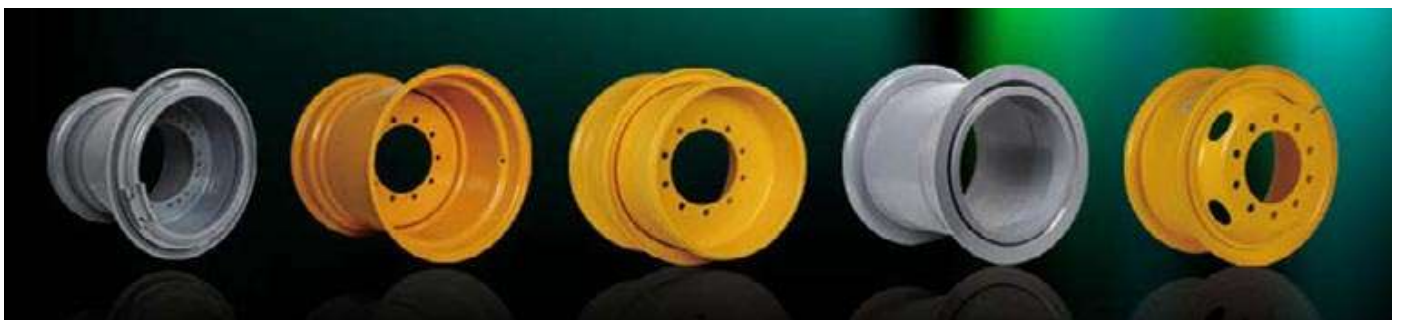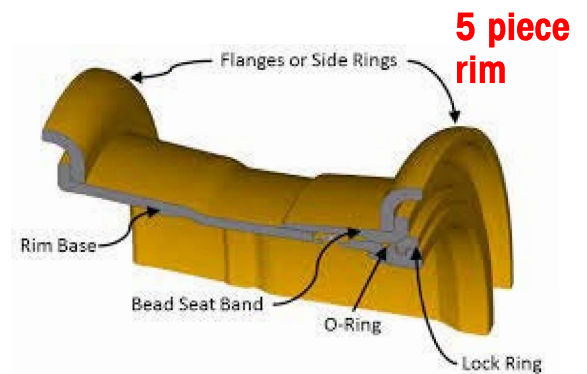



Wheel Size	Description	Typical Tyre Size
22 x 11.25	Rim Assembly	16.00 - 25
25 x 13.00	Rim Assembly	18.00 - 25
25 x 15.00	Rim Assembly	21 .00 - 25
25 x 17.00	Rim Assembly	20.50 - 25
25 x 17.00	Rim Assembly	23.50 - 25
25 x 22.00	Rim Assembly	26.50 - 25
25 x 17.00	Rim Assembly	24.00 - 29
29 x 22.00	Rim Assembly	26/05/29
29 x 25.00	Rim Assembly	29.50 - 29
29 x 27.00	Rim Assembly	875/65 R29
33 x 13.00	Rim Assembly	18.00 - 33
33 x 28.00	Rim Assembly	33.5 - 33
33 x 32.00	Rim Assembly	37.50 - 33
35 x 15.00	Rim Assembly	21 .00 - 35
35 x 17.00	Rim Assembly	24.00 - 35
35 x 27.00	Rim Assembly	28.25 - 35
35 x 31.00	Rim Assembly	37.25 - 35
39 x 28.00	Rim Assembly	33.5 - 39
39 x 32.00	Rim Assembly	37.5 - 39
45 x 36.00	Rim Assembly	45./65 - 45
49 x 15.00	Rim Assembly	21 .00 - 29
49 x 17.00	Rim Assembly	24.00 - 49
49 x 19.50	Rim Assembly	27.00 - 49
51 x 22.00	Rim Assembly	30.00 - 51
51 x 24.00	Rim Assembly	33.00 - 51
51 x 26.00	Rim Assembly	36.00 - 51
51 x 32.00	Rim Assembly	37.50 x 51
51 x 40.00	Rim Assembly	50.00 x 51
57 x 27.00	Rim Assembly	37.50 x 57
57 x 29.00	Rim Assembly	49.00 x 47
57 x 27.00	Rim Assembly	39.50/80 x 57 or 50/80 x 57
57 x 44.00	Rim Assembly	55/80 x 57 or 53.5/85 x 57
63 x 41.00	Rim Assembly	55/80 x R63

Five piece rim includes Lockring, Loose Flange, Rim and Bead Seat Bands





AGRICULTURAL TRAILER & IMPLEMENT WHEELS

RANGE OF WHEELS AVAILABLE

TYRE SIZE	WHEEL	no holes pcd bore	hole type	OFFSET
10.0/80-12 23/8.50-12 23/10.50-12	7.00x12	5/140/94	A1	0
26x12-12	10.50x12	5/140/94	A1	0
23/850-14	5Jx14	5/140/94	A1	0
260/40-14.5	8.00x14.5	5/140/94	A1	
31x15.50-15	13LBx15	6/205/161	A2	0
10.0 - 11.5 - 12.5-15.3	9.00x15.3	5/140/94	A1	0
	9.00x15.3 LD 6 mm	6/205/161	A2	0
	9.00x15.3HD-10mm	6/205/161	A2	0
	9.00x15.3	5/140/94	A1	
	9.00x15.3	5/165/127	18.5R16	0
400/60-15.5	13.00x15.5HD 10mm	6/205/161	A2	-15
		8/275/221A2	A2	0
500/55-15.5	16.00x15.5	special		
5.50 - 6.00 - 6.50-16	4.50Ex16	6/152.5/118	15-90°	46
7.00 - 7.50-16	5.50Fx16	6/152.4/118	15-90°	28.6
	5.50Fx16	6/205/161	A2	0
9.00 - 10.00 - 11.00-16 240/70-16	W8Lx1 6	6/205/161	A1	-25
	W8Lx1 6	6/152.4/118	15-90°	-25.3
	W8Lx16	6/205/161	A2	0
14.0/65 - 13.0/55 - 13.0/75-16	11.00x16	6/205/161	A2	0
16.5L-16.1	W11Cx16.1	special		
38x20x16.1	W16Cx16.1	special		
22.5L16.1	W18Cx16.1	special		
10-16.5	8.25x16.5	6/152.4/118	19-90°	
12-16.5	9.75x16.5	8/203.2/152.4	19-90°	
33/15.50x16.5	12.00x16.5	SPECIAL		
15.0/55-17	13.00x17	6/205/161	A2	0
	13.00x17	6/205/161	A2	-40
	13.00x17	6/205/161	A2	0
	13.00x17	8/275/221	A2	0
19.0/45 - 500/50-17	16.00x17	6/205/161	A2	0
	16.00x17	6/205/161	A2	-35
	16.00x17	6/205/161	A2	-100
	16.00x17	8/275/221	A2	0

AGRICULTURAL TRAILER & IMPLEMENT WHEELS



TYRE SIZE	WHEEL	no holes pcd bore	hole type	OFFSET
405/70-20 16.0/70-20	13X20	6/205/161	A2	0
	13x20	8/275/221	A2	0
405/70-20 16.70-20 425/70R20	14x20	6/205/161	A2	0
	14x20	8/275/221	A2	0
425/55R19.5 435/50R19.5 445/50R19.5	13.00X19.5	6/205/161	A2	0
	13.00X19.5	8/275/221	A2	0
	13.00X19.5	10/335/281	A3	0
	13.00x19.5	10-176-225	A3	0
435/50-19.5 445/45r19.5 18-19.5	14.00x19.5	6/205/161	A2	0
	14.00x19.5	8/275/221	A2	0
	14.00x19.5	10/335/281	A3	0
12.5 -14.5-20 360/70-20	11x20	6/205/161	A2	0
	11x20	8/275/221	A2	0
	11x20	10/335/281	A3	0
380/70R20	13.00x20	6/205/161	A2	0
	13.00x20	8/275/221	A2	0
16.0/70-20	14x20	6/205/161	A2	0
	14x20	8/275/221	A2	0
500/55-20 20.0/70-20	16x20	6/205/161	A2	0
	16x20	6/205/161	a2	-100
	16x20	8/275/221	A2	0
	16x20	10-281-335	A2	0
385/65R22.5 400/55-22.5 400/60-22.5	11.75x22.5	6/205/161	A2	0
385/55R22.5	11.75x22.5	8/275/221	A2	0
		10/335/281	A3	0,-50,-70
400/55-22.5 425/65R22.5	13.00x22.5	6/205/161	A2	0
	13.00x22.5	8/275/221	A2	0
	13.00x22.5	10/335/281	A3	0
445/65r22.5 - 18r22.5 455/40R22.5 Agri	14.00x22.5	10/335/281	A3	0
	16.00x22.5 see flotation page			

Hole type Details of hole

A1 type hole	18.5 MM Diameter Hole with countersink on one side
A2 type hole	21.5 MM diameter hole with countersink on one side
A3 type hole	27 MM diameter hole with countersink on one side



Please ask for any types that are not listed

SUITABLE FOR TRUCK TYPE TYRES



Rim Size	Specification	Km/Hr	Offset	Max Load	Tyre Size
6.00 x 17.5	6/205/161/21.5/CSink	100kph	0	1500	205/75R17.5
	8/275/221/21.5 CSink	100kph	0	1500	215/75R17.5
6.75 x 17.5	6/205/161/21.5/CSink	100kph	0	2200	215/75R17.5
	8/275/221/21.5 CSink	50kph	0	2750	235/75R17.5 245/70R17.5
7.5 x 19.5	6/205/161/121/21.5/CSink	100kph	0	2550	245/70R19.5
	8/275/221/21.5 CSink	100kph	0	2600	265/70R19.5
8.25 x 19.5	6/205/161/21.5/CSink	50kph	0	2650	265/70R19.5
	8/275/221/21.5 CSink	100kph	0	3000	285/70R19.5 305/70R19.5
13.00 x 19.5	6/205/161/21.5/CSink	50kph	0	4300	
	8/275/221/21.5 CSink	50kph	0	4300	
	10/225/176/26	100kph			435/50R19.5 445/40R19.5
	10/335/281/27R18 CSink	100kph	0	4400	
14.00 x 19.5	8/275/221/21.5 CSink	50kph	0	please enquire	435/50R19.5
	10/225/176/26	100kph			445/45R19.5
	10/335/221/27R18	100kph	0	please enquire	
18.00 x 20.5				please enquire	24R20.5
8.25 x 22.5	8/275/221/21.5 CSink	100kph	0	3500	
	10/335/221/27R18	100kph	0	3600	295RR22.5
9.00 x 22.5	8/275/221/21.5 CSink	50kph	0	3650	315/60R22.5
	10/335/221/27R18	50kph	0	4000	315/80R22.5
11.75 x 22.5	6/205/161/R16 CSink	50kph	0	4300	
	8/275/225	80kph	0	4500	385/55R22.5
	10/335/281	100kph	0	4500	385/65R22.5
	Bare Rim			-	
13.00 x 22.5	8/275/221/215R16	80kph	0	5000	425/65R22.5
	10/335/281/27R18	100kph	0	5200	445/65R22.5
	Bare Rim			-	
14.00 x 22.5	8/275/221	80kph	0	5150	
	10/335/281	100kph	0	5600	445/65R22.5 455/40R22.5
	Bare Rim			-	

**Please enquire for any other size and type of wheel and rim.
Special one-off wheels can be manufactured to your specification.**



SUITABLE FOR FLOTATION TYRES

Rim Size	Specification	Offset	Tyre Size
18.00 x 20.5	10/335/281/27R18	0	24R20.5
16.00 x 22.5	6/205/161/21.5/CSink	0	500/45-22.5, 550/45-22.5 500/60R22.5, 560/60R22.5
	8/275/221/21.5 CSink	+30,0,-30,-50	
	10/338/281	+30,0,-30,-50	
20.00 x 22.5	8/275/221/21.5 CSink	0,-30,-50	600/40-22.5, 620/40R22.5 600/50-22.5, 650/50R22.5 620/50R22.5, 650/55R22.5
	10/338/281	+50,0,-30,-50	
24.00 x 22.5	8/275/221/21.5 CSink	0,-50	700/40-22.5, 710/45R22.5 750/45R22.5 710/40R22.5, 710/35R22.5
	10/338/281	0,-50	
16.00 x 26.5	8/275/221/21.5 CSink	0,-50	500/60-26.5
	10/338/281	0,-50	
20.00 x 26.5	8/275/221/21.5 CSink	0,-50	620/55R26.5, 600/55-26.5, 600/55R26.5 650/60R26.5, 650/55R26.5 650/65R26.5, 680/55R26.5 7.00/50-26.5, 710/50R26.5 750/45R26.5
	10/338/281	0,-50	
24.00 x 26.5	8/275/221/21.5 CSink	0,-50	
	10/335/221/27R18	0,-50	
28.00 x 26.5	8/275/221/21.5 CSink	0,-50	800/45-26.5, 800/45R26.5
	10/335/221/27R18	0,-50	
20.00 x 30.5	8/275/221/21.5 CSink	0,-50	600/55-30.5, 650/60-30.5
	10/335/221/27R18	0,-50	
24.00 x 30.5	8/275/221/22.5 CSink	0,-50	750/60-30.5
	10/335/221/27R18	0,-50	
28.00 x 30.5	8/275/225	0,-50	800/55-30.5, 850/50R30.5
	10/335/281	0,-50	

**Please enquire for any other size and type of wheel and rim.
Special one-off wheels can be manufactured to your specification.**





ROWCROP NARROW WHEELS

FOR USE ON AGRICULTURAL TRACTORS & SPRAYERS

MANY OTHER
DRILLINGS
AVAILABLE PLEASE
ENQUIRE
THIS IS NOT A
COMPLETE LIST OF
TYRE FITMENTS
THE RANGE IS
BEING ADDED TO
ALL THE TIME

SEE TYRE/WHEEL
GUIDE FOR A FULL
LIST OF IF/VF
TYRES AND
WHEELS HAVE
AVAILABLE

FULL WHEEL
PRODUCTION
FACILITIES
AVAILABLE IN
HOUSE -
MACHINING,
SHOTBLASTING,
TWO-PACK OVEN-
BAKED PAINTING
FACILITIES

Rim Size	Tyre Size	N0. Studs PCD/Bore	Adjustable Centre Price Each	Fixed Centre Price
W8 x 28	9.5R28		please enquire	please enquire
W13 x 30	14.9R30	8/275, 8/330, 10/335	please enquire	please enquire
W8 x 32	9..5R32	8/275, 8/330, 10/335	please enquire	please enquire
W10 x 32	11.2/12.4.R32	8/275, 8/330, 10/335	please enquire	please enquire
W8 x 36	9.5R36	8/275, 8/330, 10/335	please enquire	please enquire
W10 x 36	11.2R36	8/275, 8/330, 10/335	please enquire	please enquire
W10 x 38	11.2R38	8/275, 8/330, 10/335	please enquire	please enquire
W8 x 44	9.5R44	8/203, 8/275, 10/335	please enquire	please enquire
W10 x 44	11.2R44	8/203, 8/275, 10/335	please enquire	please enquire
W10 x 46	11.2/12.4R46	8/203, 8/275, 10/335	please enquire	please enquire
W12 x 46	14.9R46	8/203, 8/275, 10/335	please enquire	please enquire
W13 x 46	16.9R46	8/203, 8/275, 10/335	please enquire	please enquire
W16 x 46	18.4R46	8/203, 8/275, 10/335	please enquire	
W8 x 48	9.5R348	8/203, 8/275, 10/335	please enquire	please enquire
W10 x 48	11.2R48	8/203, 8/275, 10/335	please enquire	please enquire
W12 x 48	13.6R48	8/203, 8/275, 10/335	please enquire	please enquire
W10 x 50	320/95R50	8/203, 8/275, 10/335	please enquire	please enquire
W12 x 50	380/90R50	8/203, 8/275, 10/335	please enquire	please enquire
W13 x 50				
W10 x 52	12.4R52	8/203, 8/275, 10/335	please enquire	please enquire
W10 x 54	11.2R54	8/203, 8/275, 10/335	please enquire	please enquire



FIXED CENTRE WHEELS



ADJUSTABLE CENTRE WHEELS



WHEEL DATA

Wheel Size	Max Load (kg)	Offset mm	No. of holes	PCD	Centre Bore
2.50x8	340	0	4	4"	67
	340	0	4	100mm	60
	340	0	4	115mm	85
	340	0	Ball Bearing	N/A	25.0 Bore
	340	0	Ball Bearing	N/A	25.4 Bore
3.00x8	420	0	4	4"	67
	420	0	4	100mm	60
5.50x8	350	0	4	4"	66
	350	0	4	100mm	60
7.00x8	425	0	4	4"	66
	425	0	4	100mm	60
8.50x8	300	0	4	4"	66
	300	0	4	100mm	60
3.50x10	430	0	4	4"	67
	430	0	4	100mm	60
	430	0	4	115mm	85
	430	0	4	5.5"	95.3
6.00x10	625	6.35	4	5.5"	95.3
	650	0	5	4"	66
	650	0	4	100mm	60
6.00x10H/D	750	0	4	112mm	67
	750	0	5	140mm	94
4Jx12"	450	0	5	5.5"	95.3
	450	0	4	100mm	60
	450	0, +20, +30	4	112mm	67
4.5Jx12"	900	0	5	6.5"	115
	900	0	5	112mm	67
	900	0	5	140mm	94
4Jx13"	575	20	5	130mm	85
4.5Jx13"	750	26	4	5.5" / 140mm	95.3
	750	30	4	100mm	57
4.5Jx13"	750	26	4	139.7mm	95
5Jx13"	750	30	4	100mm	57
5.5Jx13"	750	32	4	5.5"	95.3
	950	7	4	6.5" / 165mm	115
6Jx13"	950	7	5	6.5" / 165mm	115
5.5Jx14"	775	30	5	100mm	57
	900	30	4	112mm	66.5
	1150	30	5	140mm	94
	1200	39	5	6"	103
5.00Jx16"H2	1320	39.7	5	6.5"	115





FIXED AND ADJUSTABLE WHEEL

FITMENT GUIDE AND SIZES AVAILABLE



Tyre Size			Rim	Notes
55/65/70/75/80 Series	Standard			
			3.5i x 10	
			4i x 10	
	6.5/80-12	5-12	4J x 12	
		6-12	5J x 12	
		7-12	5J x 12	
24 x 8.5-12	23 x 8.5-12	10/75-12	7 x12	
24 x 9.5-12		10/80-12	7 x 12	
	23 x 10.5-12	11/65-12	8.5 x 12	
	300/60-12	26 x 12-12	10.5i x 12	
		200/60-14.5	6.75 x 14.5	
		5-15	4J x 15	
	7.5L-15	6.5/80-15	5J x 15	
	215/65-15	7.5L-15	6J x 15	
28 x 9-15	27 x8.5-15	8/75-15	7J x 15	
		27 x 10.5-15	8LB x 15	
	29 x 13.5-15	29 x 12.5-15	10LB x 15	
		31 x 11.5-15	10LB x 15	
	400/50-15	31 x 15.5-15	13LB x 15	
		33 x 15.5-15	13LB x 15	
	27 x 10.5-15.3	10/75-15.3	9 x 15.3	
		11.5/80-15.3	9 x 15.3	
		12.5/80-15.3	9 x 15.3 5mm	
		280/60-15.5	8 x 15.5	
		400/60-15.5	13 x 15.5	
		500/55-15.5	16 x 15.5	
		6-16	4.5E x 16	
		6.5-16	4.5E x 16	
		7.5-16	5.5E x 16	
	200/70R16	210/80R16	W7 x 16	
	260/65R16	240/65R16	W8 x 16	
240/70R16	250/80-16	9/70-16	W8 x16	
260/70R16	265/70R16	10/75-16	W8 x 16	
280/70R16	11-16	10-16	W8 x 16	
320/65R16		10.5/65-16	W8 x 16	
Reform MULI new	265/70R16		W8 x 16 5mm	
Reform MULI new	285/80R16		W8 x 16 5mm	
300/65R16	280/65R16	285/70R16	W9 x 16	
	11LR16	11-16	W9 x 16	
13/55-16	14/65-16	13/75-16	11 x 16	
			11LB x 16.1	
18.4-16.1	35 x 19-16.1	38 x 20-16.1	16LB x 16.1	
		10-16.5	8.25 x 16.5	
12-16.5	9.75 x 16.5			
13.5/75-430.9		13/55-17	11 x 17	
	425/55R17	15/55-17	13x17	
505/50R17	500/50-17	19/45-17	60 x 17	
			6.75 x 17.5	
	400/55-17,5	350/60-17.5	11.75 x 17.5	
		7.5-18	5.5F x 18	
		9.5-18	W7 x 18	
260/70R18	250/80-18	10.5/80-18	9 x 18	
320/65R18	275/80R18	300/65R18	9 x 18	
	365/70R18	325/70R18	11 x 18	
340/65R18	355/60R18	12.5/80-18	11 x 18	
335/80R18	13/65-18	365/70R18	11 x 18	
405/70R18	15/70-18		13 x 18	



FITMENT GUIDE AND SIZES AVAILABLE

Tyre Size		Rim	Notes
55/65/70/75/80 Series	Standard		
	6-19	3E 19	
		7.5 x 19.5*	
		8.25 x 19.5*	
		11.75 x 19.5*	
		14 x 19.5*	
6.5-20	6-20	7.5-20	5.5F x 20
		9.5-20	W8 x 20
260/70R20	260/80R20	10.5-20	9 x 20
300/70R20	275/80R20	11.2-20	9 x 20
	280/85R20	280/70R20	9 x 20
340/65R20	360/70R20	320/85R20	11 x 20
340/75R20	320/70R20	12.4-20	11 x 20
375/70R20	335/80R20	12.5-20	11 x 20
405/70R20	420/65R20	14.5-20	11 x 20
425/75R20	14.9LR20	440/65R20	13 x 20
		16/70-20	14 x 20
	500/55-20		16 x 20
		7.5 x 22.5*	
		9 x 22.5*	
	400/60-22.5	350/60-22.5	11.75 x 22.5
	420/65-22.5		13 x 22.5
	445/65R22.5		14 x 22.5
560/60R22.5	550/60-22.5	500/45-22.5	16 x 22.5
	555/60R22.5	500/60-22.5	16 x 22.5
605/50R22.5	600/60-22.5	600/50-22.5	20 x 22.5
	700/45R22.5		24 x 22.5
		8.3-24	W7 x 24
	250/85R24	9.5-24	W8 x 24
340/80R24	280/85R24	11.2-24	W10 x 24
320/85R24	320/70R24	12.4-24	W10 x 24
360/80R24	360/70R24	13.6-24	W12 x 24
420/65R24	340/85R24	14.9-24	W12 x 24
440/65R24	380/70R24	400/80R24	W13 x 24
480/65R24	420/70R24	16.9-24	W14 x 24
460/70R24	480/70R24	17.5-24	W15 x 24
540/65R24	420/85R24	440/80R24	W15 x 24
540/65R24	480/70R24	19.5-24	W16 x 24
			DW18 x 24
	380/85R26	14.9-26	DW12 x 26
	480/70R26	16.9-26	DW14 x 26
540/65R26	520/70R26	18.4-26	DW16 x 26
	580/70R26		DW18 x 26
580/70R26	620/70R26	23.1-26	DW20 x 26
750/65R26		28.1-26	DW25 x 26
		400/60-26.5	13 x 26.5
		500/60-26.5	16 x 26.5
		600/55-26.5	20 x 26.5
		700/50-26.5	24 x 26.5
		800/40-26.5	28 x 26.5





FIXED AND ADJUSTABLE WHEEL

FITMENT GUIDE AND SIZES AVAILABLE



Tyre Size			Rim	Notes
55/65/70/75/80 Series		Standard		
		8.3-28	W7 x 28	
	250/85R28	9.5-28	W8 x 28	
	280/85R28	11.2-28	W10 x 28	
	320/85R28	12.4-28	W10 x 28	
420/65R28	360/70R28	13.6-28	W12 x 28	
	380/70R28	14.9-28	W12 x 28	
380/85R28	340/85R28		W12 x 28	
440/65R28	420/70R28	16.9-28	W14 x 28	
480/65R28	480/70R28	420/85R28	W15 x 28	
540/65R28	480/60R28	19.5-28	W16 x 28	
600/65R28		520/60R28	W18 x 28	
		200/60-14.5	6.75 x 14.5	
600/65R28	600/60R28	620/70R28	DW20 x 28	
380/85R30		14.9-30	W12 x 30	
440/80R30	420/70R30	16.9-30	W14 x 30	
420/85R30	480/70R30	18.4-28	W15 x 30	
495/70R30	420/90R30	480/80R30	DW15 x 30	
540/65R30	460/85R30	520/70R30	DW16 x 30	
	600/65R30		DW18 x 30	
620/75R30	520/70R30	23.1-30	DW20 x 30	
710/65R30	710/55R30	710/60R30	DW23 x 30	
	700/65-30.5	600/60-30.5	20 x 30.5	
	800/55-30.5	710/50-30.5	24 x 30.5	
		800/45-30.5	28 x 30.5	
		850/50-30.5	28 x 30.5	
	210/95R32	8.3-32	W7 x 32	
	230/95R32	9.5-32	W8 x 32	
270/80R32	270/95R32	11.2-32	W10 x 32	
300/85R32	320/85R32	12.4-32	W10 x 32	
		320/90R32	W10 x 32	
		24.5-32	DW20 x 32	
680/75R32	650/75R32	680/85R32	DW21 x 32	
			DW25 x 32	
800/65R32	900/60R32	30.5-32	DW27 x 32	
			DW30 x 32	
	1050/50R32		DW36 x 32	
290/95R34	320/85R34	12.4-R34	DW10 x 34	
	380/85R34	14.9-34	DW13 x 34	
	440/80R34	16.9-34	DW14 x 34	
420/85R34	480/70R34	18.4-34	DW15 x 34	
		480/80R34	DW15 x 34	
540/65R34	460/85R34	500/70R34	DW16 x 34	
600/65R34	520/70R34	540/70R34	DW18 x 34	
	620/75R34	23.1-34	DW20 x 34	
	710/75R34		DW23 x 34	
	210/95R36	8.3-36	W7 x 36	
	230/95R36	9.5-36	W8 x 36	
270/80R36	270/95R36	11.2-36	W10 x 36	
	320/85R36	12.4-36	W10 x 36	
	340/85R36	13.6-36	W12/11 x 36	



FITMENT GUIDE AND SIZES AVAILABLE

Tyre Size			Rim	Notes
55/65/70/75/80 Series	Standard			
		9.5-38	W7/8 x 38	
270/95R38	320/85R28	9.5-38	W10 x 38	
	340/85R38	13.6-38	W11/12 x 38	
	380/85R38	14.9-38	W12 x 38	
	400/75R38	15.5-38	W14 x 38	
	420/85R38	16.9-38	DW15 x 38	
480/80R38	480/70R38	18.4-38	DW15 x 38	
540/65R38	520/70R38		DW16 x 38	
	460/85R38		DW16 x 38	
600/65R38	580/70R38	20.8-38	DW18 x 38	
	540/80R38	520/80R38	DW18 x 38	
650/65R38	620/70R38	600/60R38	DW20 x 38	
650/75R38	710/70R38	650/85R38	DW23 x 38	
		650/60R38	DW23 x 38	
	710/60R38	800/70R38	DW25 x 38	
			DW27 x 38	
	180/95R40	7.2-40	W6 x 40	
	230/95R40	9.5-40	W8 x 40	
		8.3-42	W7 x 42	
300/95R42	270/95R42	11.2-42	W10 x 42	
		320/90R42	W10 x 42	
460/85R42	480/80R42	18.4-42	DW16 x 42	
520/85R42	620/70R42	20.8-42	DW18 x 42	
650/65R42			DW20 x 42	
	710/70R42		DW23 x 42	
		710/60R42	DW25 x 42	
	900/50R42		DW27 x 42	
	210/95R44	8.3-44	W7 x 44	
	230/95R44	9.5-44	W8 x 44	
	270/95R44	11.2-44	W10 x 44	
300/95R46	270/95R46	12.4-46	W10 x 46	
320/95R46			W10 x 46	
340/85R46	380/90R46	14.9-46	DW12 x 46	
	420/80R46	380/85R46	DW13 x 46	
460/85R46	480/80R46	18.4-46	DW16 x 46	
	620/70R46		DW20 x 46	
	230/95R48	9.5-48	W8 x 48	
	270/95R48	11.2-48	W10 x 48	
	340/85R48	13.6-48	W12 x 48	
	320/90R50		DW10 x 50	
	480/80R50		DW16 x 50	
	300/95R52	12.4-52	W10 x 52	
320/90R54	270/95R54	11.2-54	W10 x 54	





Rotowheel stocks a vast range of standard and special wheels suitable for most types of trucks, trailers, buses etc.

Most sizes available for drum & disc brake applications. Always consult our technical sales dept before ordering. In-house fabrication of special custom made wheels all sizes and types.



Special Wheels
For EARTHMOVER AND INDUSTRIAL
applications manufactured in-house



MULTI-PIECE FORKLIFT
RIMS AND WHEELS



HIGH SPEED TRAILER
WHEELS



FORGED ALUMINIUM
WHEELS



BUS WHEELS TUBELESS
DISC OR DRUM TYPES



TRAILER WHEELS
TUBELESS



LOCK RING MILITARY
TUBELESS



LOCK-RING
TUBE TYPE
TRUCK /INDUSTRIAL

Tony Rosenthal tony.rosenthal@rotowheel.co.uk

Rotowheel and Tyre Ltd
1 Speke Road, Liverpool L25 8QA
tony.rosenthal@rotowheel.co.uk
www.rotowheel.co.uk