




Cab Card

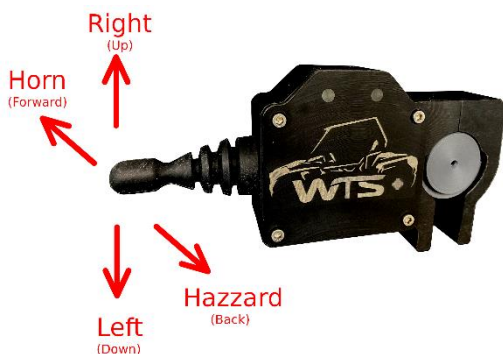

Turn Signal

- Stops after 20 sec
- Stays on while braking
- Repeat motion to cancel signaling, brake must not be on.



Left Turn	Left flashing light, solid right light
Right Turn	Right flashing light, solid left light
Hazzard	Both left and right flashing light
Power On	Both lights solid, only for brief time at startup
Connection	Three quick flashes, indicates a module may have become unpaired.

Note: Depending on the version of WTS+ the indicators may be set to backlight, meaning they are both on while driving.

WARNING: Three quick flashes indicate a module issue. Check the rear brake lights. If one or both are not working, temporarily remove the rear module to restore factory brake lights.

See the user manual for diagnostic and more detailed information.



Cab Card

Pairing

1. Ensure all Hand Controls, UTVs with WTS+ already installed, in the area are turned off with no power to them.
2. Push the Hand Control lever to the horn position, forward.
3. Turn on power and release the Hand Control lever after a couple of seconds.
4. You should be paired at this point; test the functions of the Hand Control.
5. If the above does not work, try the Repairing Procedure below.

Re-Pairing

1. Ensure all Hand Controls, UTVs with WTS+ already installed, in the area are turned off with no power to them.
2. Push the Hand Control to the horn position, forward.
3. Turn on power and release the Hand Control lever after a couple of seconds.
4. Pull the Hand Control lever back towards the driver, hazard position, for up to twenty seconds until the lights begin to flash. Let go of the lever.
5. All modules, Hand Control, Front, Rear, etc. should be flashing to indicate they are unpaired.
6. If a module does not unpair right away, wait for 5-10 minutes, with the power on, for them to flash and unpair.
7. When all modules flash, they are unpaired.

Useful Links

SwanEmersonAccessories.com

WTS Main Support Page



The support page contains the following:

- Install Manual with step-by-step instructions.
- Diagnostics information
- User Manual

Support Contact

Support@SwanEmerson.com