

SCHEDULE

LEAD	COL'R	CSA	LENGTH	SERVICE	FROM	TERMINAL	TO	TERMINAL
1	B	0.5	50	GROUND	CONN 1(4)	0-0794610-1	SCREEN CRIMP	-
2	B	0.5	250	GROUND	SCREEN CRIMP	-	CUT END	-
3	RW	0.5	250	ILLUM	CONN 1(3)	0-0794610-1	CUT END	-
4	G	0.5	250	IGNITION	CONN 1(1)	0-0794610-1	CUT END	-

COLOUR CODE:-

B	BLACK
G	GREEN
N	BROWN
R	RED
S	SLATE
U	BLUE
W	WHITE
LG	LIGHT GREEN
P	PURPLE


CABLE CSA 0.5 mm sq
AUTOMOTIVE THIN WALL

HARNESS DETAILS

TACHO CONNECTOR
MICRO MATE-N-LOK
TYCO 0-0794617-6

1	G (4)
2	-
3	RW (3)
4	B (2)
5	GW (5)
6	W (6)

VIEWED CABLE ENTRY

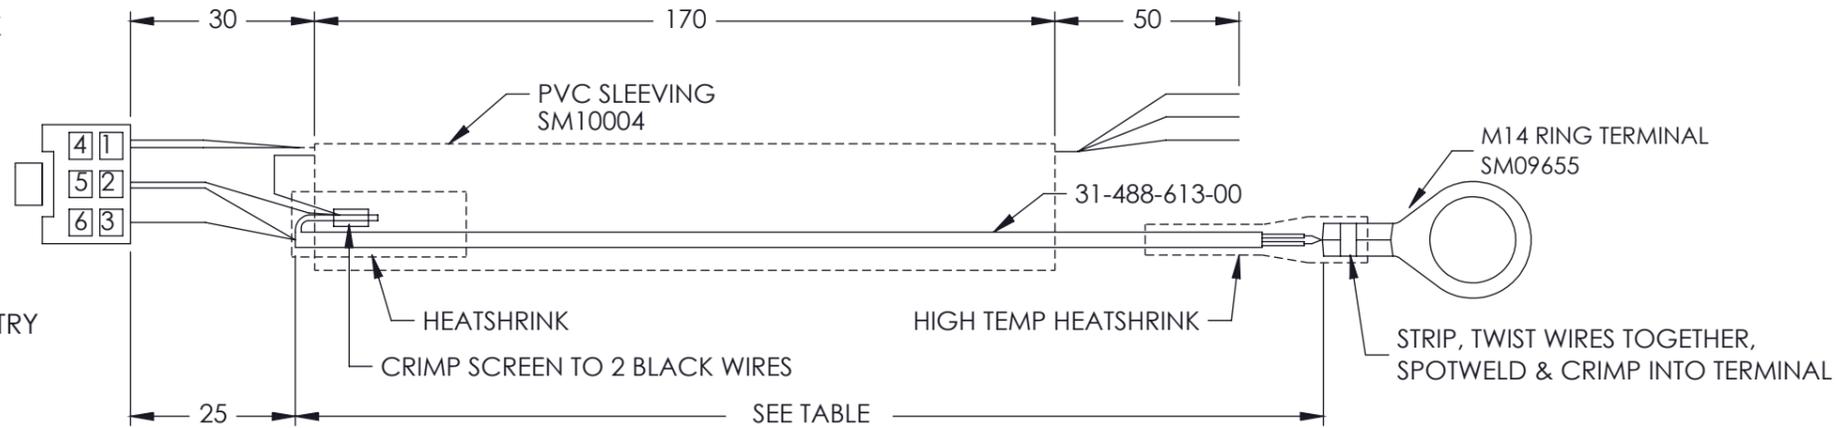

TC(+), GREEN WHITE, IS ALUMEL, NON-MAGNETIC
TC(-), WHITE, IS CHROMEL, MAGNETIC

VEHICLE	THERMOCOUPLE LENGTH	HARNESS PART No.
VW BEETLE	4500mm	41-762-401-4500
VW CAMPERVAN	6600mm	41-762-401-6600

2	Table Updated GW & W removed	07/12/23	90352
1	RELEASE	15.9.08	86965
ISSUE	MODIFICATION	DATE	NOTE No.
MATERIAL			
FINISH			
FIRST USED ON			
SIMILAR TO.			
CADFILE		08092	
DRG. No.		41-762-401-XX	
SHEET		1 OF 1	

CAERBONT AUTOMOTIVE INSTRUMENTS LTD
INFORMATION CONTAINED IN THIS DOCUMENT IS
CONFIDENTIAL TO CAI AND MAY NOT BE DISCLOSED
REPRODUCED OR UTILISED IN WHOLE OR IN PART
OTHER THAN FOR THE PURPOSE SPECIFIED WITHOUT
THE WRITTEN CONSENT OF CAI.

ALL STANDARDS SPECIFIED ARE TO LATEST ISSUE
TOLERANCES (UNLESS OTHERWISE STATED)
ANGLES ± 30'
WHOLE FIGURE DIMENSIONS ± 0.40 mm
ONE PLACE DECIMAL DIMS ± 0.20 mm
TWO PLACE DECIMAL DIMS ± 0.10 mm
IN ACCORDANCE WITH BS 308 FORM AND POSITIONAL TOLERANCES AND
ASSOCIATED DATUM FEATURES APPLY

SCALE :- **DIMS PRINTED**
DIMENSIONS IN mm/ inches
THIRD ANGLE PROJECTION

TITLE.
**THERMOCOUPLE HARNESS FOR
CYLINDER HEAD TEMP GAUGE**
DRAWN. *J. John* CHECKED MAN.APP DES.APP.

A3