



Temperature performance is the basic performance index of cabinets and is also the primary consideration of the users in cabinet selection. According to the temperature ratings in GBT21001, there are different temperature ranges for storage of different food:

Temperature Class	Temperature Range*	Food to Store
L1	-15~-18°C	Frozen food, ice creams
M1	-1~5°C	Fresh meat
M2	-1~7°C	Dairy food, milk, fruits, etc.
H1	1~10°C	Soft drinks, fruits & vegetable, etc.
Others	5~10°C	Fruits & vegetable





* Temperature range refers to the center temperature of the various Test packages (equal to the center temperature of food) in the cabinets in accordance with GBT21001. Both the maximum and minimum temperature, including the normal refrigeration and defrost cycles, must be within the temperature range.

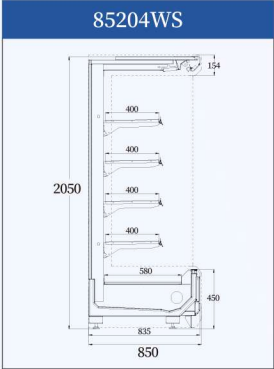

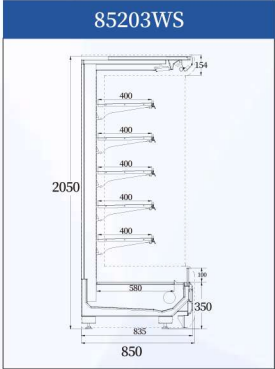

Product Features

- Complete product lines (width of 850/1050mm, height of 2050/2200mm), suitable for various store layouts;
- The minimalist aesthetic and low front height design enhance the display effect of merchandise;
- The design of an enhanced high-efficiency evaporator and the optimization of air curtain management technology provide efficient and energy-saving operation;
- Optimized temperature, suitable for various daily fresh products, meat, fruits and vegetables;
- Reinforced crash bar design, safe and reliable.

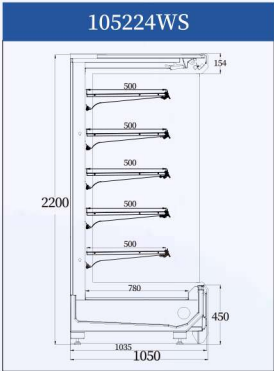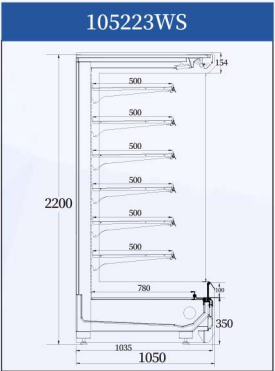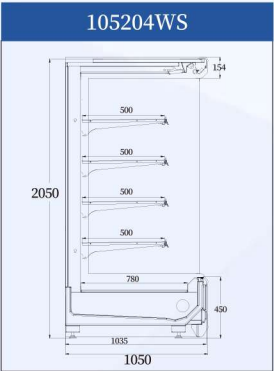
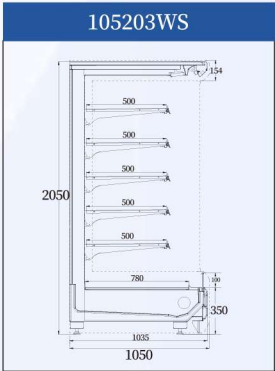


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity /L
Low front height 350mm Width 850mm Height 2050mm	RVMC-4-85203WS	1250*850*2050	-1~7	2.10	960
	RVMC-6-85203WS	1875*850*2050	-1~7	3.14	1440
	RVMC-8-85203WS	2500*850*2050	-1~7	4.19	1920
	RVMC-12-85203WS	3750*850*2050	-1~7	6.29	2880
	RVMC-ER90-85203WS	1850*1850*2050	5~10	3.61	1648
Low front height 450mm Width 850mm Height 2050mm	RVMC-4-85204WS	1250*850*2050	-1~7	2.02	960
	RVMC-6-85204WS	1875*850*2050	-1~7	3.04	1440
	RVMC-8-85204WS	2500*850*2050	-1~7	4.05	1920
	RVMC-12-85204WS	3750*850*2050	-1~7	6.07	2880
	RVMC-ER90-85204WS	1850*1850*2050	5~10	3.47	1586
Low front height 350mm Width 1050mm Height 2050mm	RVMC-4-105203WS	1250*1050*2050	-1~7	2.29	1154
	RVMC-6-105203WS	1875*1050*2050	-1~7	3.43	1731
	RVMC-8-105203WS	2500*1050*2050	-1~7	4.57	2308
	RVMC-12-105203WS	3750*1050*2050	-1~7	6.86	3462
	RVMC-ER90-105203WS	1850*1850*2050	5~10	3.61	1648
Low front height 450mm Width 1050mm Height 2050mm	RVMC-4-105204WS	1250*1050*2050	-1~7	2.14	1154
	RVMC-6-105204WS	1875*1050*2050	-1~7	3.20	1731
	RVMC-8-105204WS	2500*1050*2050	-1~7	4.27	2308
	RVMC-12-105204WS	3750*1050*2050	-1~7	6.41	3462
	RVMC-ER90-105204WS	1850*1850*2050	5~10	4.34	2242
Low front height 350mm Width 1050mm Height 2200mm	RVMC-4-105223WS	1250*1050*2200	-1~7	2.54	1340
	RVMC-6-105223WS	1875*1050*2200	-1~7	3.83	2010
	RVMC-8-105223WS	2500*1050*2200	-1~7	5.10	2670
	RVMC-12-105223WS	3750*1050*2200	-1~7	7.65	4010
	RVMC-ER90-105223WS	1850*1850*2200	5~10	3.97	1812
Low front height 450mm Width 1050mm Height 2200mm	RVMC-4-105224WS	1250*1050*2200	-1~7	2.44	1340
	RVMC-6-105224WS	1875*1050*2200	-1~7	3.73	2010
	RVMC-8-105224WS	2500*1050*2200	-1~7	5.00	2670
	RVMC-12-105224WS	3750*1050*2200	-1~7	7.55	4010
	RVMC-ER90-105224WS	1850*1850*2200	5~10	3.87	1812

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity /L
Low front height 350mm Width 850mm Height 2050mm	RVMM-4-85203WS	1250*850*2050	-1~5	2.10	960
	RVMM-6-85203WS	1875*850*2050	-1~5	3.14	1440
	RVMM-8-85203WS	2500*850*2050	-1~5	4.19	1920
	RVMM-12-85203WS	3750*850*2050	-1~5	6.29	2880
	RVMM-ER90-85203WS	1850*1850*2050	-1~5	3.61	1648
Low front height 450mm Width 850mm Height 2050mm	RVMM-4-85204WS	1250*850*2050	-1~5	2.02	960
	RVMM-6-85204WS	1875*850*2050	-1~5	3.04	1440
	RVMM-8-85204WS	2500*850*2050	-1~5	4.05	1920
	RVMM-12-85204WS	3750*850*2050	-1~5	6.07	2880
	RVMM-ER90-85204WS	1850*1850*2050	-1~5	3.47	1586
Low front height 350mm Width 1050mm Height 2050mm	RVMM-4-105203WS	1250*1050*2050	-1~5	2.29	1154
	RVMM-6-105203WS	1875*1050*2050	-1~5	3.43	1731
	RVMM-8-105203WS	2500*1050*2050	-1~5	4.57	2308
	RVMM-12-105203WS	3750*1050*2050	-1~5	6.86	3462
	RVMM-ER90-105203WS	1850*1850*2050	-1~5	3.61	1648
Low front height 450mm Width 1050mm Height 2050mm	RVMM-4-105204WS	1250*1050*2050	-1~5	2.14	1154
	RVMM-6-105204WS	1875*1050*2050	-1~5	3.20	1731
	RVMM-8-105204WS	2500*1050*2050	-1~5	4.27	2308
	RVMM-12-105204WS	3750*1050*2050	-1~5	6.41	3462
	RVMM-ER90-105204WS	1850*1850*2050	-1~5	4.34	2242
Low front height 350mm Width 1050mm Height 2200mm	RVMM-4-105223WS	1250*1050*2200	-1~5	2.54	1340
	RVMM-6-105223WS	1875*1050*2200	-1~5	3.83	2010
	RVMM-8-105223WS	2500*1050*2200	-1~5	5.10	2670
	RVMM-12-105223WS	3750*1050*2200	-1~5	7.65	4010
	RVMM-ER90-105223WS	1850*1850*2200	-1~5	3.97	1812
Low front height 450mm Width 1050mm Height 2200mm	RVMM-4-105224WS	1250*1050*2200	-1~5	2.44	1340
	RVMM-6-105224WS	1875*1050*2200	-1~5	3.73	2010
	RVMM-8-105224WS	2500*1050*2200	-1~5	5.00	2670
	RVMM-12-105224WS	3750*1050*2200	-1~5	7.55	4010
	RVMM-ER90-105224WS	1850*1850*2200	-1~5	3.87	1812

Note: “**ER**” in the model name (e.g. RVMC-ER90-85203WS) means “Right-angle outward turns”






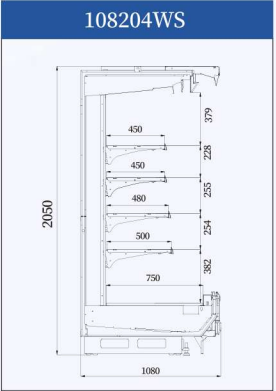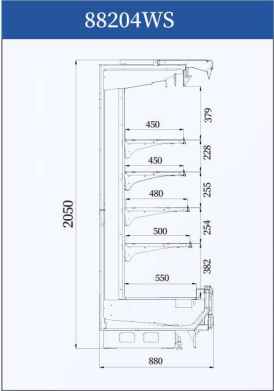

Product Features

- Uses genuine dual air curtains: the inner airflow channel provides cooling while the outer airflow channel offers protection, resulting in uniform temperature distribution and improved energy efficiency;
- Retains the “WS” series multideck appearance while revising the shelf support structure to enhance load-bearing capacity;
- Employs a rear-mounted evaporator to resolve the existing meat cabinet issue where the drainage trough cannot be properly cleaned;
- Standard adjustable feet with leveling bolts at the front for easy on-site height adjustment;
- The kickplate is set back to make room for ambient lighting;
- A viewing/access port for the evaporator is added to the rear to facilitate defrost inspection;
- Additional mounting holes for shelf allow customers to adjust shelf angles on site.

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity /L
Low front height 450mm Width 880mm Height 2050mm	RVMM-6-88204WS	1875*880*2050	0~4	3.14	1450
	RVMM-8-88204WS	2500*880*2050	0~4	4.19	1930
	RVMM-12-88204WS	3750*880*2050	0~4	6.29	2900
Low front height 450mm Width 1080mm Height 2050mm	RVMM-6-108204WS	1875*1080*2050	0~4	3.43	1750
	RVMM-8-108204WS	2500*1080*2050	0~4	4.57	2351
	RVMM-12-108204WS	3750*1080*2050	0~4	6.86	3510

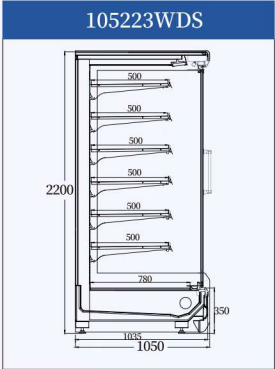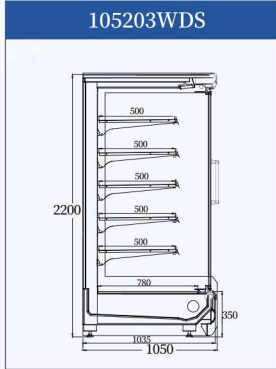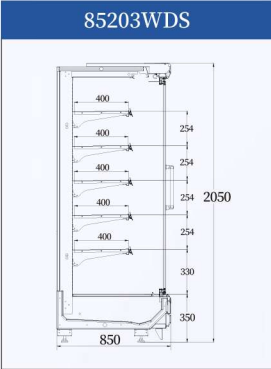

Product Features

- The minimalist aesthetic and low front height design enhance the display effect of merchandise;
- The design of an enhanced high-efficiency evaporator and the optimization of air curtain management technology provide efficient and energy-saving operation;
- Optimized temperature, suitable for various daily fresh products, meat, fruits and vegetables;
- Multiple depths, heights, and shelf options are available for various store layouts;
- The panoramic high-transparency glass doors showcase the products from all angles, providing a clear and beautiful view;
- Reinforced crash bar design, safe and reliable.

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m ²	Net Capacity / L
Low front height 350mm Width 850mm Height 2050mm	RVMM-4-85203WDS	1250*850*2050	-1~5	1.89	960
	RVMM-6-85203WDS	1875*850*2050	-1~5	2.84	1440
	RVMM-8-85203WDS	2500*850*2050	-1~5	3.78	1920
	RVMM-12-85203WDS	3750*850*2050	-1~5	5.67	2880
Low front height 350mm Width 1050mm Height 2050mm	RVMM-4-105203WDS	1250*1050*2050	-1~5	1.92	1154
	RVMM-6-105203WDS	1875*1050*2050	-1~5	2.88	1731
	RVMM-8-105203WDS	2500*1050*2050	-1~5	3.84	2308
	RVMM-12-105203WDS	3750*1050*2050	-1~5	5.77	3462
Low front height 350mm Width 1050mm Height 2200mm	RVMM-4-105223WDS	1250*1050*2200	-1~5	2.05	1340
	RVMM-6-105223WDS	1875*1050*2200	-1~5	3.10	2010
	RVMM-8-105223WDS	2500*1050*2200	-1~5	4.12	2670
	RVMM-12-105223WDS	3750*1050*2200	-1~5	6.19	4010




Remote Semi Vertical Multideck Open Chiller



Product Features

- The minimalist aesthetic and low front height design enhance the display effect of merchandise;
- The design of an enhanced high-efficiency evaporator and the optimization of air curtain management technology provide efficient and energy-saving operation;
- Complete product lines (1.3/1.5m, round/square end cabinet), suitable for various store layouts;
- Optimized temperature, suitable for various daily fresh products, meat, fruits and vegetables;
- Reinforced crash bar design, safe and reliable.

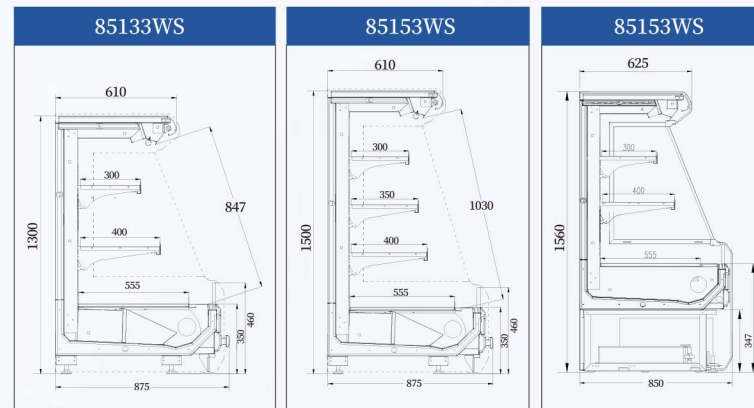



Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity/L
Remote 85133WS Height 1300mm	RVMC-4-85133WS	1250*850*1300	-1~7	1.09	530
	RVMC-6-85133WS	1875*850*1300	-1~7	1.64	800
	RVMC-8-85133WS	2500*850*1300	-1~7	2.18	900
	RVMC-12-85133WS	3750*850*1300	-1~7	3.27	1505
Square end cabinet	RVMC-EN-85133WS	1960*850*1300	-1~7	1.19	635
Square transparent end cabinet	RVMC-ER-85133WS	1960*850*1300	-1~7	2.15	695
Round end cabinet	RVMC-EU-85133WS	1960*850*1300	-1~7	2.21	710
Remote 85153WS Height 1500mm	RVMC-4-85153WS	1250*850*1500	-1~7	1.34	535
	RVMC-6-85153WS	1875*850*1500	-1~7	2.01	805
	RVMC-8-85153WS	2500*850*1500	-1~7	2.68	1070
	RVMC-12-85153WS	3750*850*1500	-1~7	4.02	1610
Square end cabinet	RVMC-EN-85153WS	1960*850*1500	-1~7	2.42	810
Square transparent end cabinet	RVMC-ER-85153WS	1960*850*1500	-1~7	2.65	860
Round end cabinet	RVMC-EU-85153WS	1960*850*1500	-1~7	2.75	883
Plugin 85153WS Height 1500mm	IVMC-4-85153WS	1330*850*1560	-1~7	1.09	530
	IVMC-6-85153WS	1955*850*1560	-1~7	1.64	800
	IVMC-8-85153WS	2580*850*1560	-1~7	2.18	900






Product Features

- Complete product lines, flexible combinations for various store layouts;
- Multi-layered product displays enhance visual appeal and optimize space efficiency, featuring adjustable angle designs for the base plate and the shelf;
- Optimized air curtain design maintains an interior temperature of -2 to 2°C, ideal for storing various meat products;
- Precise temperature control and constant temperature preservation technology keep meat products fresh and tender for extended periods;
- Designed with generous storage capacity for easy replenishment during peak hours;
- Insulated transparent glass side panels enhance merchandise visibility;
- Metal air outlets are easy to clean and maintain;
- Optional aluminum alloy crash bars provide additional protection.

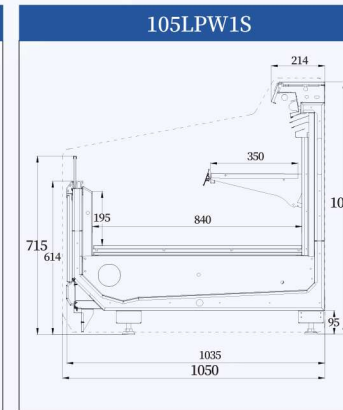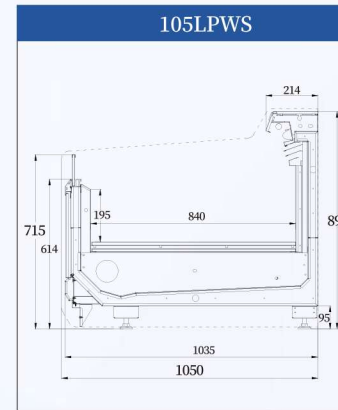


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity / L
Remote Service Counter	RHCM-3-105LPWS	938*1050*895	-2~2	0.73	170
	RHCM-4-105LPWS	1250*1050*895	-2~2	0.96	227
	RHCM-5-105LPWS	1563*1050*895	-2~2	1.20	283
	RHCM-6-105LPWS	1875*1050*895	-2~2	1.44	340
	RHCM-8-105LPWS	2500*1050*895	-2~2	1.92	454
	RHCM-12-105LPWS	3750*1050*895	-2~2	2.87	680
90° rhombus external corner	RHCM-ER90-105LPWS	1850*1850*895	-2~2	1.82	437
90° rhombus internal corner	RHCM-IR90-105LPWS	1830*1830*895	-2~2	1.67	381
Remote Service Counter with 1-Layer Shelf	RHCM-3-105LPW1S	938*1050*1015	-2~2	0.81	222
	RHCM-4-105LPW1S	1250*1050*1015	-2~2	1.09	297
	RHCM-5-105LPW1S	1563*1050*1015	-2~2	1.36	371
	RHCM-6-105LPW1S	1875*1050*1015	-2~2	1.64	445
	RHCM-8-105LPW1S	2500*1050*1015	-2~2	2.19	594
	RHCM-12-105LPW1S	3750*1050*1015	-2~2	3.28	890
90° rhombus external corner	RHCM-ER90-105LPW1S	1850*1850*1015	-2~2	2.18	532
90° rhombus internal corner	RHCM-IR90-105LPW1S	1830*1830*1015	-2~2	1.90	496



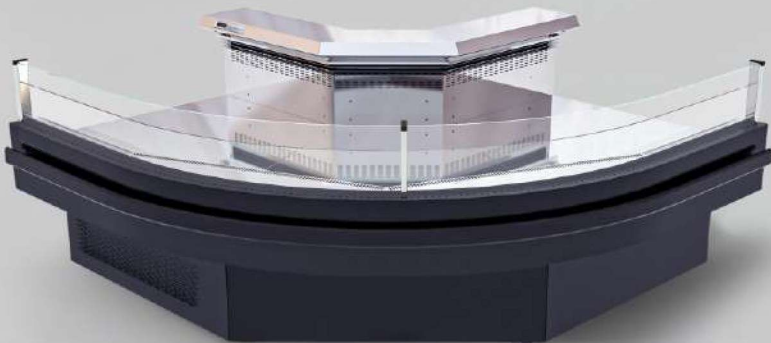

Product Features

- Complete product lines (Plugin/Remote), flexible combinations for various store layouts;
- The panoramic high-transparency glass front displays merchandise from all angles, offering a clear and unobstructed view;
- Optimized air curtain design maintains an interior temperature of -1 to 5°C, ideal for storing various meat products;
- Precise temperature control and constant temperature preservation technology keep meat products fresh and tender for extended periods;
- Designed with generous storage capacity for easy replenishment during peak hours;
- Metal air outlets are easy to clean and maintain;
- Optional aluminum alloy crash bars provide additional protection.

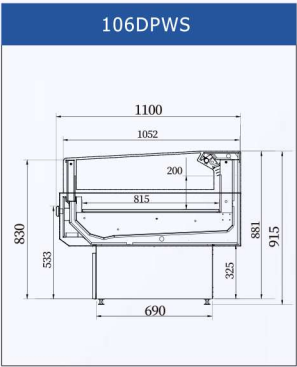


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity /L
Remote Dual Glass Service Counter	RHCM-3-106DPWS	938*1100*915	-1~5	0.66	152
	RHCM-4-106DPWS	1250*1100*915	-1~5	0.88	203
	RHCM-5-106DPWS	1563*1100*915	-1~5	1.10	253
	RHCM-6-106DPWS	1875*1100*915	-1~5	1.33	305
	RHCM-8-106DPWS	2500*1100*915	-1~5	1.77	407
	RHCM-12-106DPWS	3750*1100*915	-1~5	2.66	611
90° rhombus external corner	RHCM-EU90-106DPWS	1905*1905*915	-1~5	1.88	381
90° rhombus external corner	RHCM-ER90-106DPWS	1905*1905*915	-1~5	1.88	381
90° rhombus internal corner	RHCM-IR90-106DPWS	1905*1905*915	-1~5	1.98	381
Plugin Dual Glass Service Counter	IHCM-3-106DPWS	998*1100*915	-1~5	0.66	152
	IHCM-4-106DPWS	1310*1100*915	-1~5	0.88	203
	IHCM-5-106DPWS	1623*1100*915	-1~5	1.10	253
	IHCM-6-106DPWS	1935*1100*915	-1~5	1.33	305
	IHCM-8-106DPWS	2560*1100*915	-1~5	1.77	407
	IHCM-12-106DPWS	3810*1100*915	-1~5	2.66	611
90° rhombus external corner	IHCM-EU90-106DPWS	1905*1905*915	-1~5	1.88	381
90° rhombus external corner	IHCM-ER90-106DPWS	1905*1905*915	-1~5	1.88	381
90° rhombus internal corner	IHCM-IR90-106DPWS	1905*1905*915	-1~5	1.98	381





Product Features


- Complete product lines (Plugin/Remote), flexible combinations for various store layouts;
- The panoramic high-transparency glass front displays merchandise from all angles, offering a clear and unobstructed view;
- Multi-layered product displays enhance visual appeal and optimize space efficiency, featuring adjustable angle designs for the base plate and the shelf;
- Optimized air curtain design maintains an interior temperature of -1 to 5°C, ideal for storing various meat products;
- Precise temperature control and constant temperature preservation technology keep meat products fresh and tender for extended periods;
- Designed with generous storage capacity for easy replenishment during peak hours;
- Metal air outlets are easy to clean and maintain;
- Optional aluminum alloy crash bars provide additional protection.

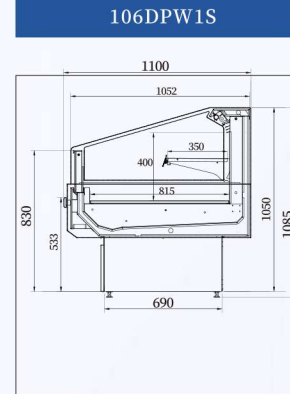

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
Remote Dual Glass Service Counter with 1-Layer Shelf	RHCM-3-106DPW1S	938*1100*1085	-1~5	0.80	208
	RHCM-4-106DPW1S	1250*1100*1085	-1~5	1.07	278
	RHCM-5-106DPW1S	1563*1100*1085	-1~5	1.30	317
	RHCM-6-106DPW1S	1875*1100*1085	-1~5	1.61	417
	RHCM-8-106DPW1S	2500*1100*1085	-1~5	2.15	557
	RHCM-12-106DPW1S	3750*1100*1085	-1~5	3.23	836
90° rhombus external corner	RHCM-EU90-106DPW1S	1905*1905*1085	-1~5	2.03	510
90° rhombus external corner	RHCM-ER90-106DPW1S	1905*1905*1085	-1~5	2.03	510
90° rhombus internal corner	RHCM-IR90-106DPW1S	1905*1905*1115	-1~5	2.58	510
Plugin Dual Glass Service Counter with 1-Layer Shelf	IHCM-3-106DPW1S	998*1100*1085	-1~5	0.80	208
	IHCM-4-106DPW1S	1310*1100*1085	-1~5	1.07	278
	IHCM-5-106DPW1S	1623*1100*1085	-1~5	1.30	347
	IHCM-6-106DPW1S	1935*1100*1085	-1~5	1.61	417
	IHCM-8-106DPW1S	2560*1100*1085	-1~5	2.15	557
	IHCM-12-106DPW1S	3810*1100*1085	-1~5	3.23	836
90° rhombus external corner	IHCM-EU90-106DPW1S	1905*1905*1085	-1~5	2.03	510
90° rhombus external corner	IHCM-ER90-106DPW1S	1905*1905*1085	-1~5	2.03	510
90° rhombus internal corner	IHCM-IR90-106DPW1S	1905*1905*1115	-1~5	2.58	510




Tilted Glass Service Counter

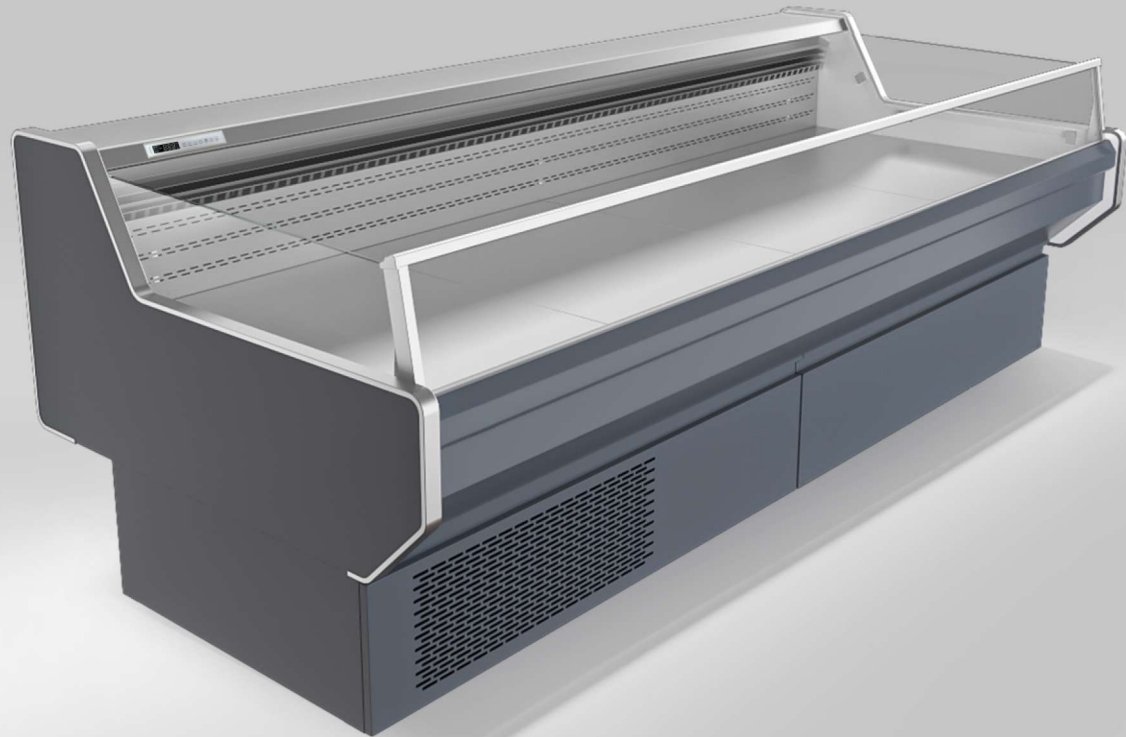


Product Features



- Complete product lines (Plugin/Remote), flexible combinations for various store layouts;
- High-transparency double-layer hollow glass with aluminum alloy edge sealing offers both excellent display effects and solid durability;
- Optimized air curtain design maintains an interior temperature of -1 to 5°C, ideal for storing various meat products;
- Precise temperature control and constant temperature preservation technology keep meat products fresh and tender for extended periods;
- Designed with generous storage capacity for easy replenishment during peak hours;
- Insulated transparent glass side panels enhance merchandise visibility;
- Metal air outlets are easy to clean and maintain;
- Optional aluminum alloy crash bars provide additional protection.

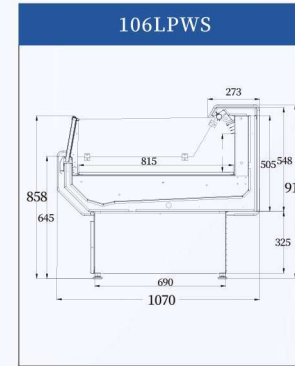

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA / m³	Net Capacity /L
Remote Tilted Glass Service Counter	RHCM-4-106LPWS	1250*1070*915	-1~5	0.99	203
	RHCM-6-106LPWS	1875*1070*915	-1~5	1.49	305
	RHCM-8-106LPWS	2500*1070*915	-1~5	1.99	407
	RHCM-12-106LPWS	3750*1070*915	-1~5	2.98	611
90° rhombus external corner	RHCM-ER90-106LPWS	1850*1850*915	-1~5	1.87	381
Plugin Tilted Glass Service Counter	IHCM-4-106LPWS	1310*1070*915	-1~5	0.99	203
	IHCM-6-106LPWS	1935*1070*915	-1~5	1.49	305
	IHCM-8-106LPWS	2560*1070*915	-1~5	1.99	407
	IHCM-12-106LPWS	3810*1070*915	-1~5	2.98	611
90° rhombus external corner	IHCM-ER90-106LPWS	1850*1850*915	-1~5	1.87	381

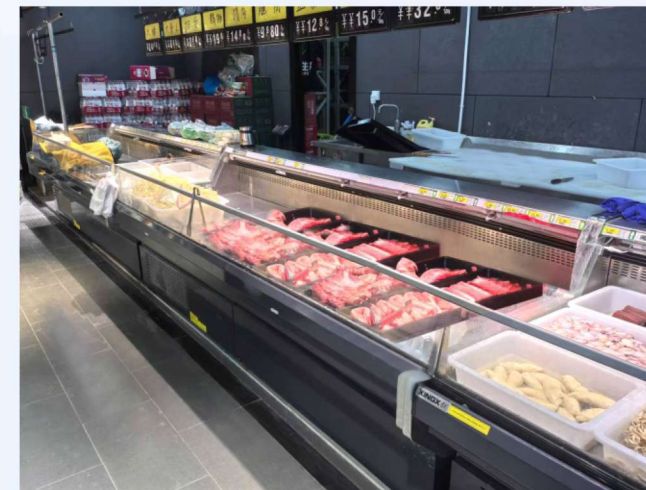


Sliding Door Service Counter

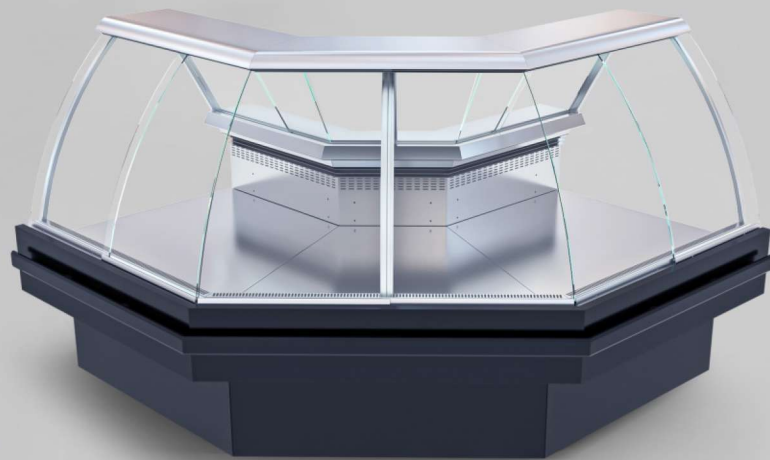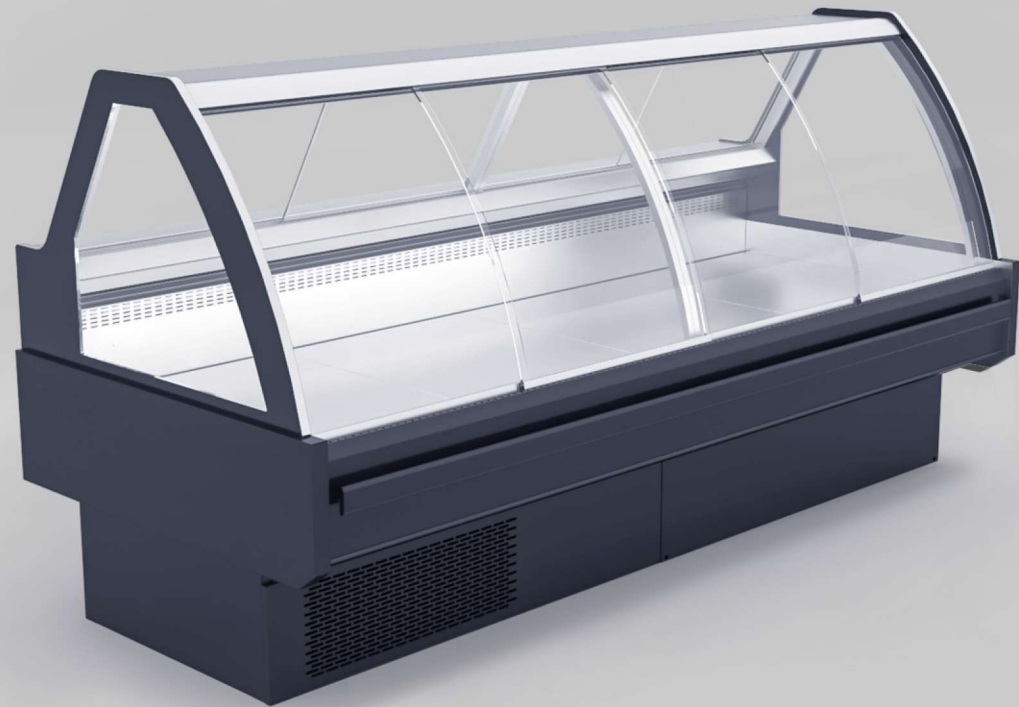

Product Features

- Complete product lines (Plugin/Remote), flexible combinations for various store layouts;
- Panoramic high-transparency glass sliding doors showcase merchandise from all angles, providing a clear and captivating view;
- All-dimensional reinforced structure with front and rear full-track glass sliding doors offers both excellent display effects and solid durability;
- Optimized air curtain design maintains an interior temperature of -1 to 5°C, ideal for storing various meat products;
- Precise temperature control and constant temperature preservation technology keep meat products fresh and tender for extended periods;
- Designed with generous storage capacity for easy replenishment during peak hours;
- Insulated transparent glass side panels enhance merchandise visibility;
- Metal air outlets are easy to clean and maintain;
- Optional aluminum alloy crash bars provide additional protection.

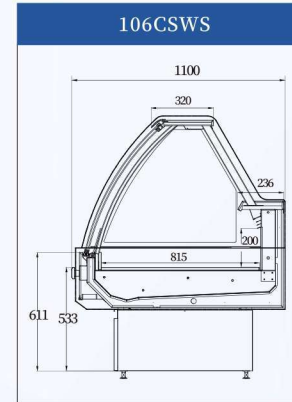


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity /L
Remote Sliding Door Service Counter	RHCM-4-106CSWS	1250*1100*1335	-1~5	0.58	203
	RHCM-6-106CSWS	1875*1100*1335	-1~5	0.88	305
	RHCM-8-106CSWS	2500*1100*1335	-1~5	1.17	407
	RHCM-12-106CSWS	3750*1100*1335	-1~5	1.76	611
90° rhombus external corner	RHCM-ER90-106CSWS	1905*1905*1335	-1~5	1.88	381
Plugin Sliding Door Service Counter	IHCM-4-106CSWS	1310*1100*1335	-1~5	0.58	203
	IHCM-6-106CSWS	1935*1100*1335	-1~5	0.88	305
	IHCM-8-106CSWS	2560*1100*1335	-1~5	1.17	407
	IHCM-12-106CSWS	3810*1100*1335	-1~5	1.76	611
90° rhombus external corner	IHCM-ER90-106CSWS	1905*1905*1335	-1~5	1.88	381








Product Features

- Multiple types (remote/plugin), flexible combinations for various applications;
- Front panoramic high-transparency glass showcases merchandise from all angles, providing a clear and captivating view;
- The sloped design of the base increases the coverage area of the ice, enhancing the display effect;
- Precise temperature control and constant temperature preservation technology keep meat products fresh and tender for extended periods;
- Designed with generous storage capacity for easy replenishment during peak hours;
- Insulated transparent glass side panels enhance merchandise visibility;
- Metal air outlets are easy to clean and maintain;
- Optional aluminum alloy crash bars provide additional protection.

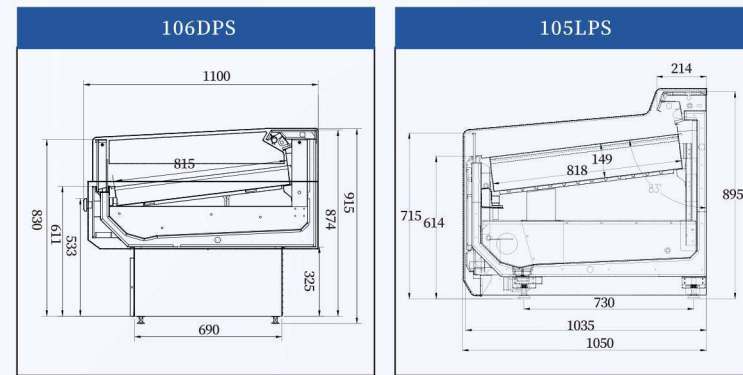

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
Remote Ice Counter	RHCI-4-106DPS	1250*1100*915	-1-5	1.04	209
	RHCI-6-106DPS	1875*1100*915	-1-5	1.55	314
	RHCI-8-106DPS	2500*1100*915	-1-5	2.08	419
90° rhombus external corner	RHCI-ER90-106DPS	1905*1905*915	-1-5	1.88	156
90° rhombus internal corner	RHCI-IR90-106DPS	1905*1905*915	-1-5	1.88	156
Plugin Ice Counter	IHCI-4-106DPS	1310*1100*915	-1-5	1.04	209
	IHCI-6-106DPS	1935*1100*915	-1-5	1.55	314
	IHCI-8-106DPS	2560*1100*915	-1-5	2.08	419
90° rhombus external corner	IHCI-ER90-106DPS	1905*1905*915	-1-5	1.88	156
105 Series Remote Ice Counter	RHCI-4-105LPS	1250*1050*895	-2-2	0.96	148
	RHCI-6-105LPS	1875*1050*895	-2-2	1.44	221
	RHCI-8-105LPS	2500*1050*895	-2-2	1.92	295
90° rhombus external corner	RHCI-ER90-105LPS	1850*1920*895	-2-2	1.82	354



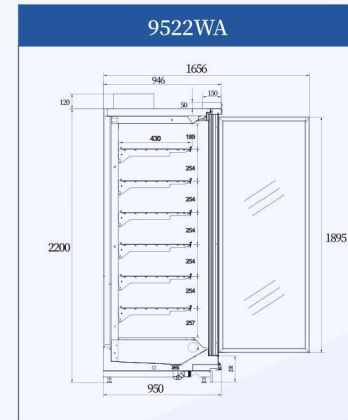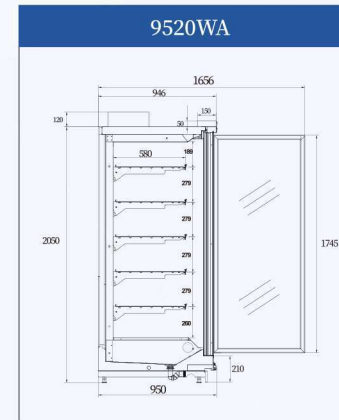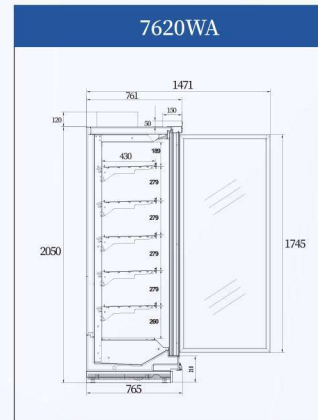

Product Features

- Complete product lines (Depth 765/950mm, Height 2050/2200mm), suitable for various store layouts;
- 2 to 5 door combinations for various needs;
- Unique 3-layer hollow anti fog glass doors, better visibility, heating insulating and energy saving;
- Higher evaporating temperature ($\geq -28^{\circ}\text{C}$), 5 to 10% energy saving compared with common freezers;
- Low front height (210mm), integrated door handle, increasing merchandise display effect.


产品系列	型号	外形尺寸/mm(长*宽*高)	温度范围/ $^{\circ}\text{C}$	展示面积/ m^2	有效容积/L
7620 Glass Door Freezer Width 765mm Height 2050mm	RVGF-2D-7620WA	1500*765*2050	-18~-22	1.52	963
	RVGF-3D-7620WA	2250*765*2050	-18~-22	2.28	1445
	RVGF-4D-7620WA	3000*765*2050	-18~-22	3.04	1927
	RVGF-5D-7620WA	3750*765*2050	-18~-22	3.80	2408
9520 Glass Door Freezer Width 950mm Height 2050mm	RVGF-2D-9520WA	1500*950*2050	-18~-22	1.52	1328
	RVGF-3D-9520WA	2250*950*2050	-18~-22	2.28	1991
	RVGF-4D-9520WA	3000*950*2050	-18~-22	3.04	2655
	RVGF-5D-9520WA	3750*950*2050	-18~-22	3.80	3319
9522 Glass Door Freezer Width 950mm Height 2200mm	RVGF-2D-9522WA	1500*950*2200	-18~-22	1.65	1493
	RVGF-3D-9522WA	2250*950*2200	-18~-22	2.47	2182
	RVGF-4D-9522WA	3000*950*2200	-18~-22	3.29	2986
	RVGF-5D-9522WA	3750*950*2200	-18~-22	4.12	3732





Product Features

- Panoramic high-transparency glass windows showcase merchandise from all angles, providing a clear and captivating view;
- Multiple depth options and various combinations of single-sided and double-sided island cabinets are available in two series—open top and sliding glass door—to meet various store layout requirements;
- The design of an enhanced high-efficiency evaporator and the optimization of air curtain management technology provide efficient and energy-saving operation;
- Precise temperature control meets the temperature requirements of various frozen products;
- The extensive use of aluminum alloy materials perfectly blends the structural stability of the product with the visual tension of a metallic texture;
- Optional non-cold shelf to increase display space;
- Reinforced crash bar design, safe and reliable.

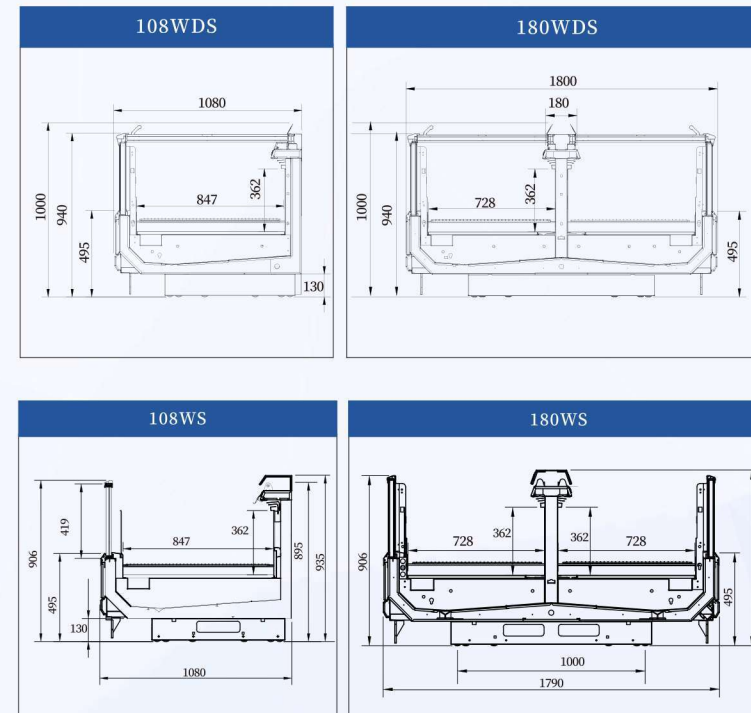


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity / L
108 Single-Sided with Glass Door	RHIF-4-108WDS	1250*1080*1000	-18~-22	1.14	383
	RHIF-6-108WDS	1875*1080*1000	-18~-22	1.73	575
	RHIF-8-108WDS	2500*1080*1000	-18~-22	2.32	767
	RHIF-12-108WDS	3750*1080*1000	-18~-22	3.51	1150
End cabinet	RHIF-EN-108WDS	2230*1080*1000	-18~-22	2.24	639
180 Double-Sided with Glass Door	RHIF-6-180WDS	1875*1800*1000	-18~-22	3.10	988
	RHIF-8-180WDS	2500*1800*1000	-18~-22	4.14	1318
	RHIF-12-180WDS	3750*1800*1000	-18~-22	6.22	1977
	RHIF-EN-180WDS	1800*1080*1000	-18~-22	1.80	497
108 Single-Sided Open Top	RHIF-4-108WS	1250*1080*915	-18~-22	1.14	383
	RHIF-6-108WS	1875*1080*915	-18~-22	1.73	575
	RHIF-8-108WS	2500*1080*915	-18~-22	2.32	767
	RHIF-12-108WS	3750*1080*915	-18~-22	3.51	1150
End cabinet	RHIF-EN-108WS	2230*1080*915	-18~-22	2.24	639
180 Double-Sided Open Top	RHIF-6-180WS	1875*1800*915	-18~-22	3.10	988
	RHIF-8-180WS	2500*1800*915	-18~-22	4.14	1318
	RHIF-12-180WS	3750*1800*915	-18~-22	6.22	1977
	RHIF-EN-180WS	1800*1080*915	-18~-22	1.80	497






Product Features

- Precise temperature control meets the temperature requirements of various frozen products;
- Double hollow tempered electric heating glass provides strong visual impact and excellent display effects;
- Airflow guide duct design ensures even air distribution, improving cooling efficiency by 5% and saving energy;
- EBM evaporator fan motor guarantees reliable cooling (EC fan motor optional).



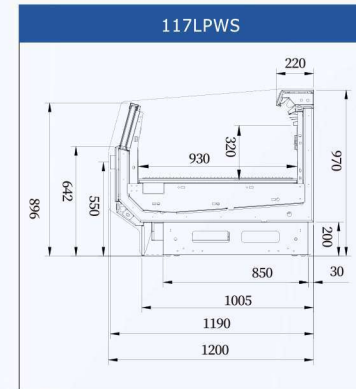


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
American Style Island Freezer	RHCF-4-117LPWS	1250*1200*970	-18~-22	1.21	372
	RHCF-6-117LPWS	1875*1200*970	-18~-22	1.81	496
	RHCF-8-117LPWS	2500*1200*970	-18~-22	2.41	744
	RHCF-12-117LPWS	3750*1200*970	-18~-22	3.62	1116
End cabinet	RHCF-EN8-117LPWS	2600*1200*970	-18~-22	2.41	744

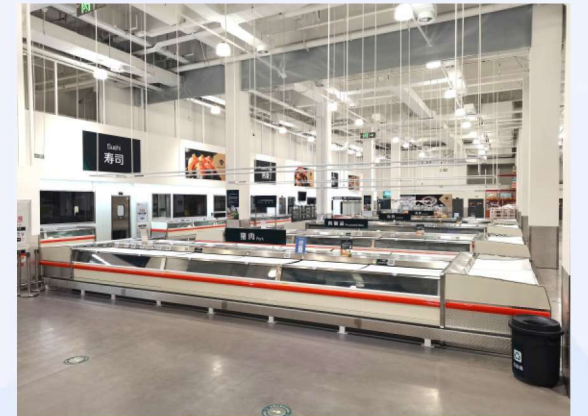

Product Features

- High COP inverter compressor & Non-CFC refrigerant;
- The top cabinet features a frameless 3-Layer tempered glass door with low-E film, film heater and self-closing;
- With steel supporting bracket, stable and load bearing. Can match different bottom cabinet to increase merchandise display area;
- Digital controller with temperature display;
- The whole foaming, excellent thermal insulation effect, reduces 15% energy consumption compared with spliced foaming;
- Hot tube self-evaporating, 20% energy saving compared with electric heating.

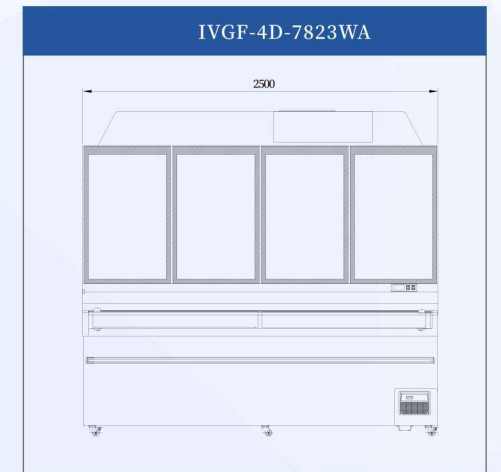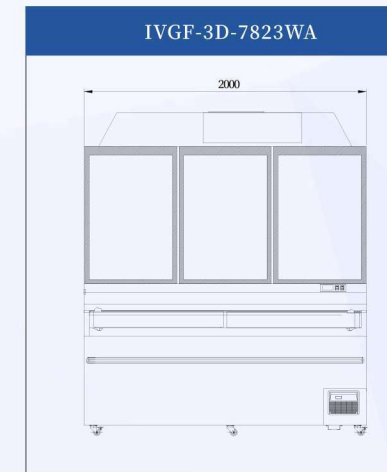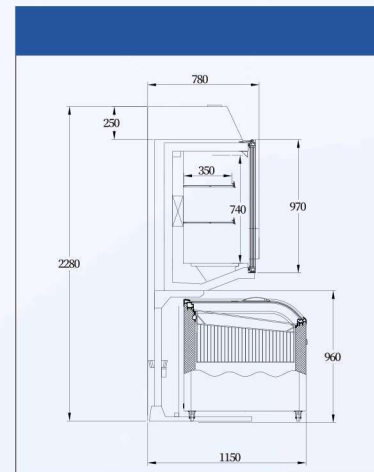

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity / L
Top freezer with inverter compressor	IVGF-3D-7823WAI	2000*780*2280	≤-18	1.39	494
	IVGF-4D-7823WAI	2500*780*2280	≤-18	1.73	626





Z1009





Z1009S



Product Features

- High COP compressor & Non-CFC refrigerant;
- Ventilated air cooling with non-defrost;
- Double-layer tempered glass locks in cold air, preventing cold air from leakage;
- Digital controller with temperature display;
- LED light guide panel provides uniform brightness of soft and comfortable light;
- Aluminum alloy crash bar features strong linear design that harmonizes well with the square appearance of the cabinet.

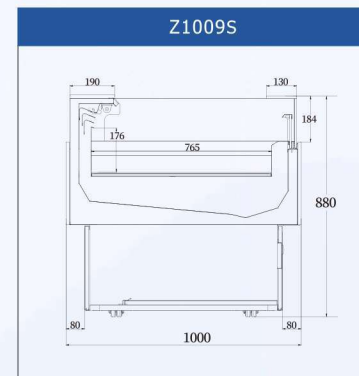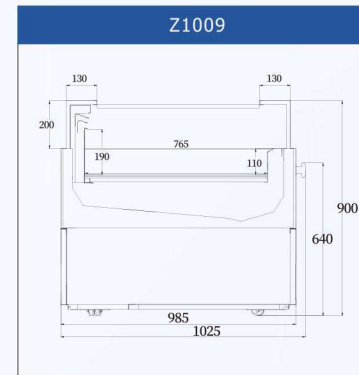

- High COP compressor & Non-CFC refrigerant;
- Ventilated air cooling with non-defrost;
- Tempered glass locks in cold air, preventing cold air leakage;
- Digital controller with temperature display;
- LED light guide panel provides uniform brightness of soft and comfortable light;
- Interior mirror-finish stainless steel highlights the appeal of the product.

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
Open Top Cake Showcase Chiller	IHBC-1.8-Z1009	1800*1025*900	0~4	1.24	248
	IHBC-2.0-Z1009	2050*1025*900	0~4	1.43	286
	IHBC-2.5-Z1009	2520*1025*900	0~4	1.79	358
Open Top Cake Showcase Chiller (S Series)	IHBC-1.5-Z1009S	1500*1000*880	2~8	1.06	180
	IHBC-1.8-Z1009S	1800*1000*880	2~8	1.29	219




Semi Vertical Cake Showcase Chiller



Product Features

- High COP compressor & Non-CFC refrigerant;
- Ventilated air cooling with non-defrost;
- The cabinet is compact and exquisite, featuring a mirrored stainless steel interior that highlights the appeal of merchandise;
- The transparent glass design enhances the display effect of merchandise;
- With a high-efficiency evaporator and precise temperature control, energy saving;
- Aluminum alloy crash bar features strong linear design that harmonizes well with the square appearance of the cabinet.

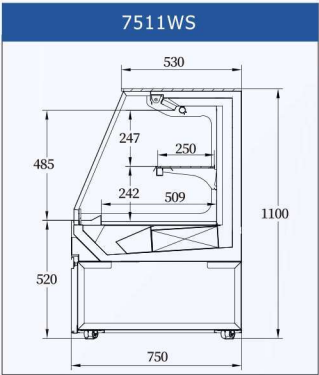

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
Remote Semi Vertical Cake Showcase Chiller	RVMC-1.5-7511WS	1500*750*1100	0~5	1.21	383
	RVMC-1.8-7511WS	1800*750*1100	0~5	1.45	461
	RVMC-2.1-7511WS	2100*750*1100	0~5	1.69	540
Plugin Semi Vertical Cake Showcase Chiller	IVMC-1.5-7511WS	1500*750*1100	0~5	1.21	383
	IVMC-1.8-7511WS	1800*750*1100	0~5	1.45	461
	IVMC-2.1-7511WS	2100*750*1100	0~5	1.69	540





X Series Island Combination Freezer



Product Features

- High COP compressor & Non-CFC refrigerant;
- Electronic temperature control for keeping stable temperature;
- Curved tempered & low-E glass, up-down sliding glass door, extensive displaying;
- The end cabinet features a curved large viewing glass design that is aesthetically pleasing, offers excellent transparency, and provides a great display effect;
- Optional high-efficiency inverter system can save energy consumption by up to 40%;
- Non-cold shelves optional to expand the display space;
- Copper tube evaporator optional.

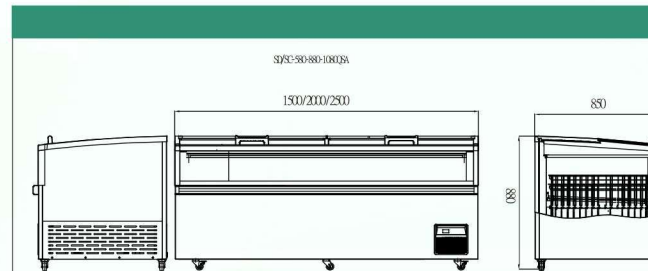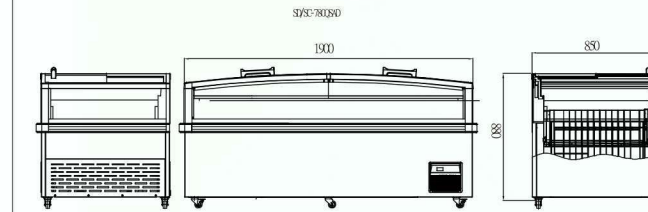

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity /L
X Series Island Combination Freezer	SD/SC780QSAD (End cabinet)	1900*850*880	≤-18	1.12	501
	SD/SC580QSA	1500*850*880	≤-18	0.85	353
	SD/SC880QSA	2000*850*880	≤-18	1.26	508
	SD/SC1080QSA	2500*850*880	≤-18	1.61	598





X Super Large Window Series Island Combination Freezer




Product Features


- High COP compressor & Non-CFC refrigerant;
- Electronic temperature control for keeping stable temperature;
- Curved tempered & low-E glass, up-down sliding glass door, extensive displaying;
- Extra-large glass window showcases the merchandise's appeal from all angles;
- Non-cold shelves optional to expand the display space;

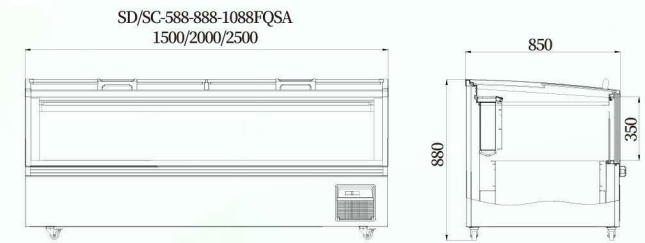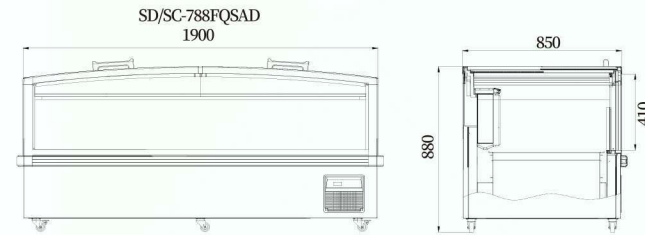

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity / L
X Super Large Window Series Island Combination Freezer	SD/SC-788FQSAD (End cabinet)	1900*850*880	≤-18	1.34	516
	SD/SC-588FQSA	1500*850*880	≤-18	0.94	382
	SD/SC-888FQSA	2000*850*880	≤-18	1.39	549
	SD/SC-1088FQSA	2500*850*880	≤-18	1.78	650


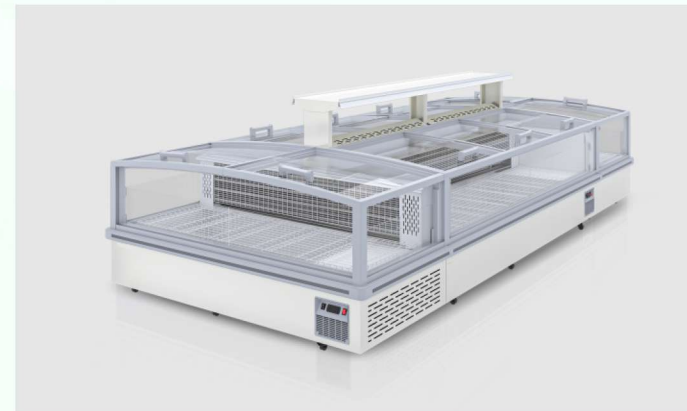


E Series Island Combination Freezer

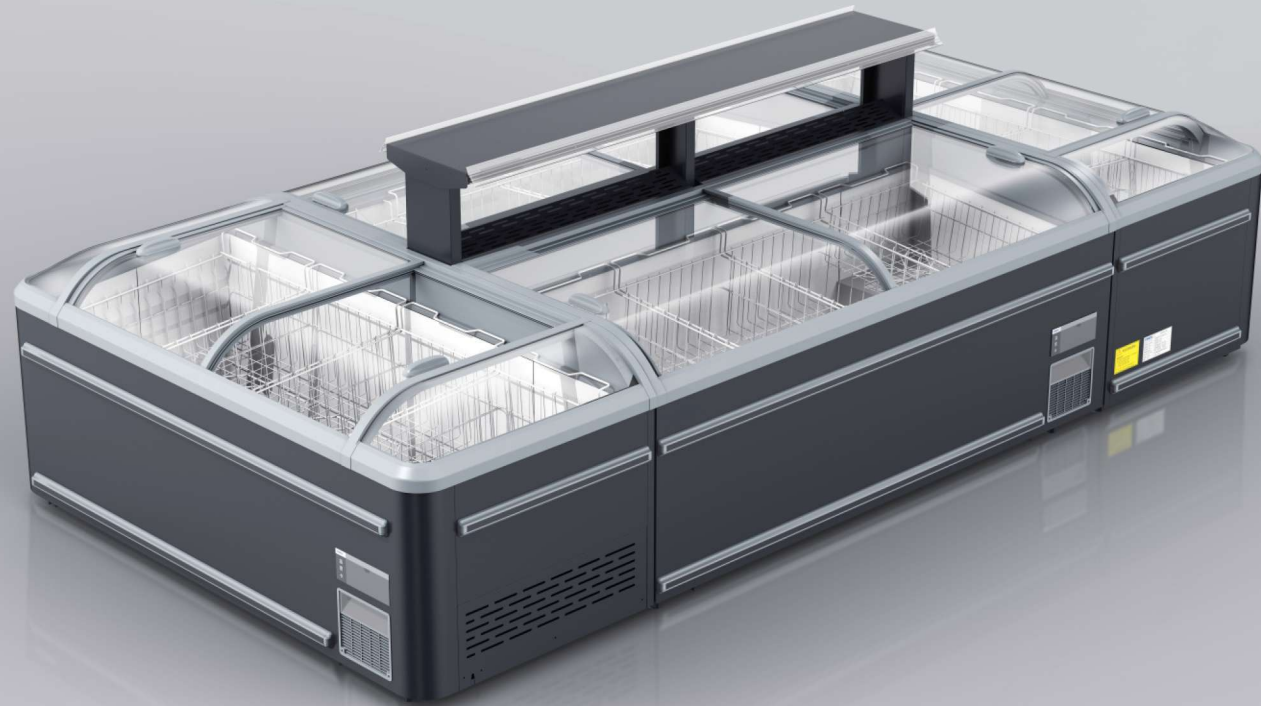


Product Features

- High COP compressor & Non-CFC refrigerant;
- Electronic temperature control for keeping stable temperature;
- Curved tempered & low-E glass, left-right sliding glass door, extensive displaying;
- Optional high-efficiency inverter system can save energy consumption by up to 40%;
- Non-cold shelves optional to expand the display space;
- Copper tube evaporator optional.

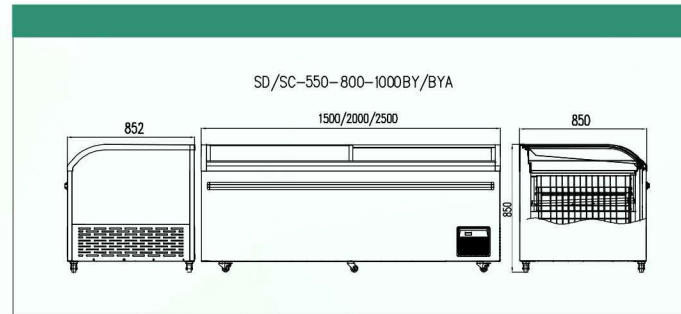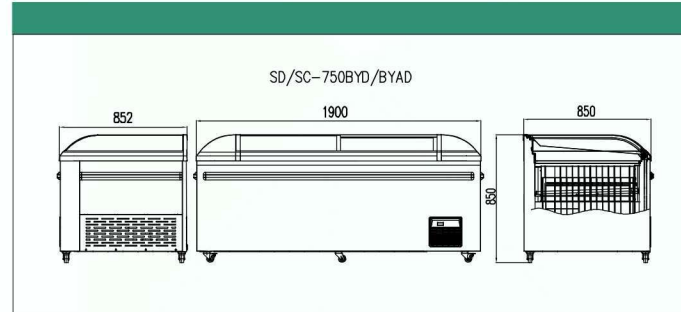

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m ²	Net Capacity /L
E Series Island Combination Freezer	SD/SC-750BYAD(End cabinet)	1900*850*850	≤-18	1.03	510
	SD/SC-550BYA	1500*850*850	≤-18	0.87	378
	SD/SC-800BYA	2000*850*850	≤-18	1.14	543
	SD/SC-1000BYA	2500*850*850	≤-18	1.54	642


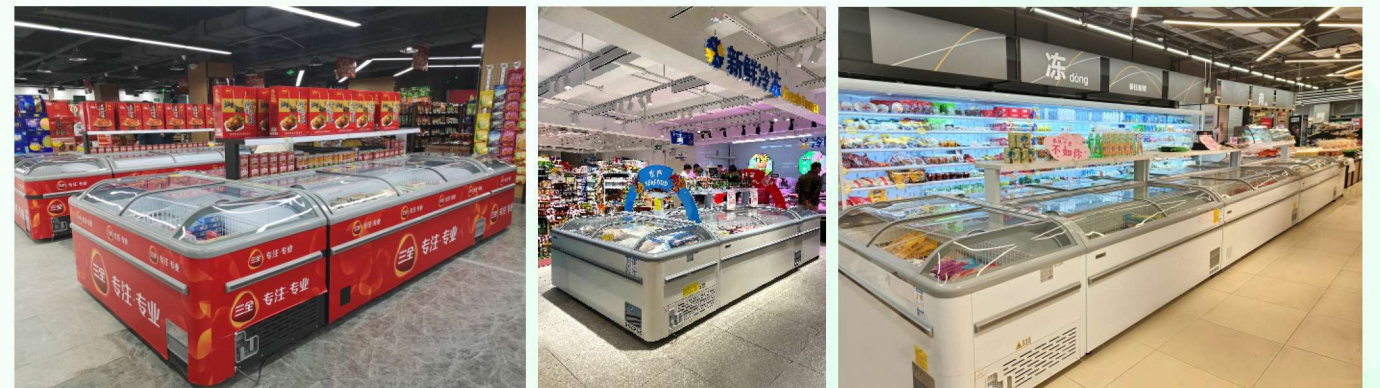


D Series Island Combination Freezer



Product Features

- High COP compressor & Non-CFC refrigerant;
- Electronic temperature control for keeping stable temperature;
- Curved tempered & low-E glass, left-right sliding glass door, extensive displaying;
- Optional high-efficiency inverter system can save energy consumption by up to 40%;
- Non-cold shelves optional to expand the display space;
- Copper tube evaporator optional.

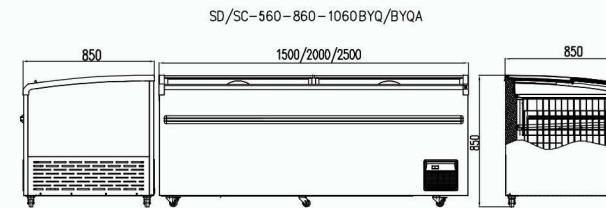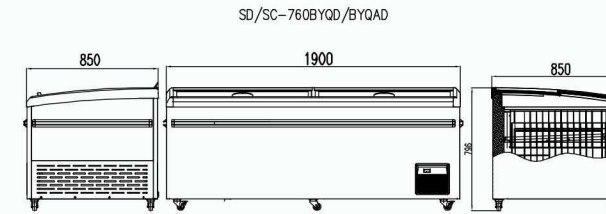

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity /L
D Series Island Combination Freezer	SD/SC760BYQAD(End cabinet)	1900*850*800	≤-18	1.07	441
	SD/SC560BYQA	1500*850*850	≤-18	0.85	378
	SD/SC860BYQA	2000*850*850	≤-18	1.21	543
	SD/SC1060BYQA	2500*850*850	≤-18	1.53	642





B Series Island Combination Freezer



Product Features

- High COP compressor & Non-CFC refrigerant;
- Electronic temperature control for keeping stable temperature;
- Curved tempered & low-E glass, left-right/up-down sliding glass door, extensive displaying;
- Optional high-efficiency inverter system can save energy consumption by up to 40%;
- Non-cold shelves optional to expand the display space;
- Copper tube evaporator optional.

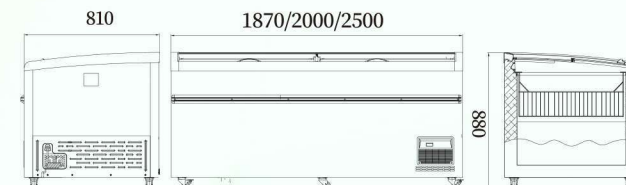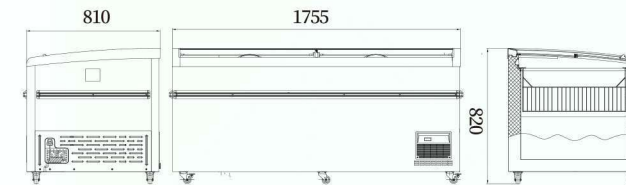


Product series	Model		Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity /L
B Series Island Combination Freezer	SD/SC-620BYA (End cabinet)	Auto defrost (left-right sliding door)	1755*810*820	≤-18	0.92	435
	SD/SC-720BYA		1870*810*880	≤-18	0.97	538
	SD/SC-820BYA		2000*810*880	≤-18	1.04	582
	SD/SC-1020BYA		2500*810*880	≤-18	1.36	703
	SD/SC-620BYQA (End cabinet)	Auto defrost (up-down sliding door)	1755*810*820	≤-18	0.92	435
	SD/SC-720BYQA		1870*810*880	≤-18	0.97	538
	SD/SC-820BYQA		2000*810*880	≤-18	1.04	582
	SD/SC-1020BYQA		2500*810*880	≤-18	1.36	703





Product Features

- Complete product lines, suitable for various store layouts;
- Multiple air speeds, multi-layer extrusion air curtain, multi-fan and air plate design to ensure equal temperature;
- High-efficiency evaporator design with the evaporation temperature increased to -5°C, and the energy consumption of the system is reduced by 10%;
- Slow-release night curtain design doubles service life;
- Several units can be channeled together to create a seamless string of displays;
- Top LED light box optional;
- Inverter model (4/6 feet) available.

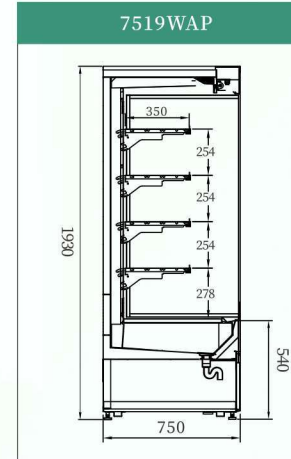

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity /L
Width 750mm Height 1930mm	IVMC-3-7519WAP	975*750*1930	-1~7/1~10	1.83	480
	IVMC-4-7519WAP	1280*750*1930	-1~7/1~10	2.25	610
	IVMC-6-7519WAP	1890*750*1930	-1~7/1~10	3.09	920
	IVMC-8-7519WAP	2500*750*1930	-1~7/1~10	3.93	1230




NEW Plugin Multideck Open Chiller



Product Features

- Complete product lines, suitable for various store layouts;
- High COP compressor & Non-CFC refrigerant;
- The slanted back design provides a larger display area;
- Multiple air speeds, multi-layer extrusion air curtain, multi-fan and air plate design to ensure equal temperature;
- High-efficiency evaporator design with the evaporation temperature increased to -5°C, and the energy consumption of the system is reduced by 10%;
- The mirrored stainless steel return air vent is both aesthetic and durable;
- The integrated front panel is visually appealing and easy to clean;
- Slow-release night curtain design doubles service life;
- Top acrylic lightbox at the top facilitates advertising;
- Several units can be channeled together to create a seamless string of displays.

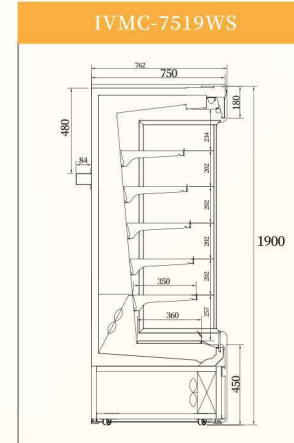

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity /L
NEW Plugin Multideck Open Chiller	IVMC-3-7519WS	975*750*1900	-1~7	1.98	370
	IVMC-4-7519WS	1280*750*1900	-1~7	2.39	493
	IVMC-6-7519WS	1890*750*1900	-1~7	3.23	740
	IVMC-8-7519WS	2500*750*1900	-1~7	4.06	986




Plugin Multideck Chiller with Doors -Premium Edition



Product Features

- Full-view high-transmission glass doors showcase merchandise from every angle;
- Removable transparent handles or adhesive handles available as options;
- 2-layer tempered LowE glass door with door closer. Softclose hinges deliver smooth opening and closing, improving seal integrity and reducing thermal loss;
- Integrated design for easy deployment ;
- Twin compressor system for precise temperature control, preserving freshness (Note: 4ft model is equipped with a single compressor).

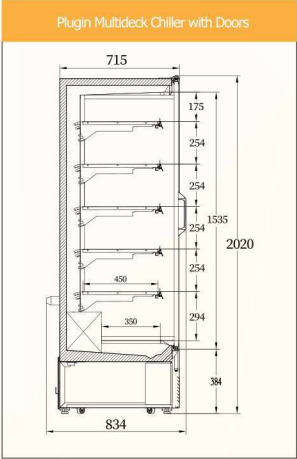

Product series	Model	Dimension /mm (W*D*H)	Temperature Range/°C	TDA /m³	Net Capacity /L
Plugin Multideck Chiller with Doors	IVMC-4-7120WDS	1310*715*2020	-1~5	3.14	764
	IVMC-6-7120WDS	1935*715*2020	-1~5	4.05	1147
	IVMC-8-7120WDS	2560*715*2020	-1~5	5.00	1529




NEW Remote Multideck Open Chiller



Product Features

- Complete product lines, suitable for various store layouts;
- The slanted back design provides a larger display area;
- Multiple air speeds, multi-layer extrusion air curtain, multi-fan and air plate design to ensure equal temperature;
- High-efficiency evaporator design with the evaporation temperature increased to -5°C, and the energy consumption of the system is reduced by 10%;
- The mirrored stainless steel return air vent is both aesthetic and durable;
- The integrated front panel is visually appealing and easy to clean;
- Slow-release night curtain design doubles service life;
- Top acrylic lightbox at the top facilitates advertising;
- Several units can be channeled together to create a seamless string of displays.

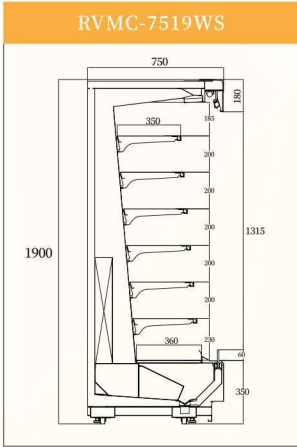


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
NEW Remote Multideck Open Chiller	RVMC-3-7519WS	915*750*1900	-1~10	1.27	401
	RVMC-4-7519WS	1220*750*1900	-1~10	1.70	535
	RVMC-6-7519WS	1830*750*1900	-1~10	2.55	802
	RVMC-8-7519WS	2440*750*1900	-1~10	3.39	1069





Product Features

- Complete product lines, suitable for various store layouts;
- The slanted back design provides a larger display area;
- The panoramic high-transparency glass door showcases merchandise from all angles, offering a clear and stunning view;
- Multiple air speeds, multi-layer extrusion air curtain, multi-fan and air plate design to ensure equal temperature;
- High-efficiency evaporator design with the evaporation temperature increased to -5°C , and the energy consumption of the system is reduced by 10%;
- The mirrored stainless steel return air vent is both aesthetic and durable;
- The integrated front panel is visually appealing and easy to clean;
- Slow-release night curtain design doubles service life;
- Several units can be channeled together to create a seamless string of displays.

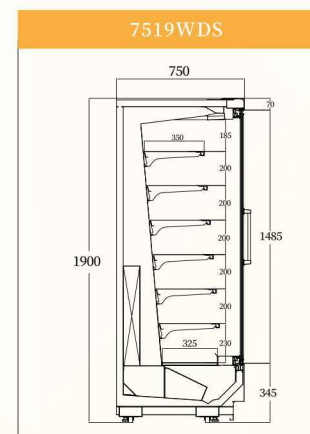


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/ m²	Net Capacity
NEW Remote Multideck Open Chiller with Door	RVMC-3-7519WDS	915*750*1900	-1~10	1.27	401
	RVMC-4-7519WDS	1220*750*1900	-1~10	1.70	535
	RVMC-6-7519WDS	1830*750*1900	-1~10	2.55	802
	RVMC-8-7519WDS	2440*750*1900	-1~10	3.39	1069



Product Features

- Designed to meet the needs of the convenience store;
- High COP imported brand compressor & Non-CFC refrigerant;
- Digital controller with temperature display;
- All-glass hollow screen-printed side panels for better display effect;
- Hot tube self-evaporating water tray design reduces water pouring times;
- Flip-top water box cover makes pouring water more convenient.

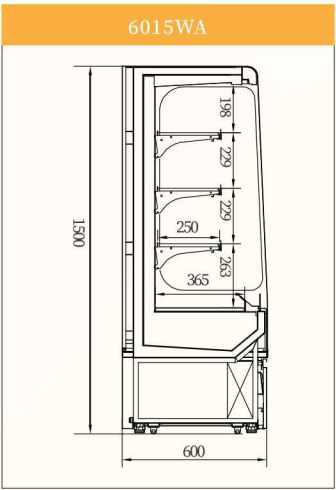



Product series	Model	Dimension / mm (W*D*H)	Temperature Range/°C	TDA / m ³	Net Capacity / L
Height 1500mm	IVMC-2-6015WA	760*600*1500	-1~7	1.22	176
Height 1500mm	IVMC-4-6015WA	1200*600*1500	-1~7	1.65	293





Product Features

- High COP compressor & Non-CFC refrigerant;
- Ventilated air-cooling with non-defrost;
- Digital controller with temperature display;
- Tempered glass door with aluminum alloy frame, low-E film, film heater and self-closing;
- Standard equipped with a 90-degree door stop, more convenient for customers to pick up merchandise;
- Integrated foaming for the cabinet, excellent thermal insulation effect, reduce cold leakage;
- Hot tube self-evaporating, no need to pour water.

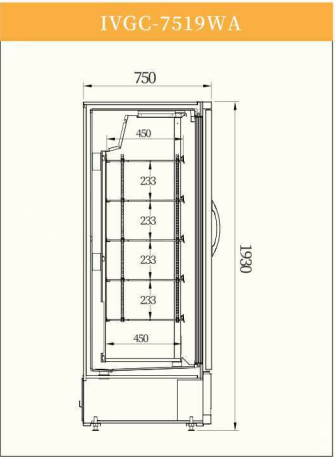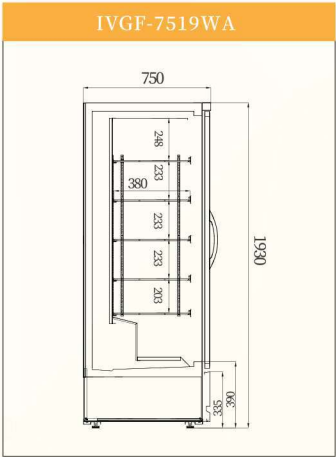


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
Plugin Glass Door Freezer	IVGF-2D-7519WA	1220*750*1930	≤-18	1.08	605
	IVGF-3D-7519WA	1830*750*1930	≤-18	1.62	935
Plugin Glass Door Chiller	IVGC-2D-7519WA	1220*750*1930	-1~7	1.17	685
	IVGC-3D-7519WA	1830*750*1930	-1~7	2.25	1066





Product Features

- High COP compressor & Non-CFC refrigerant;
- Ventilated air-cooling with non-defrost;
- Copper pipe evaporator;
- Digital controller with temperature display;
- 3-Layer tempered glass door with low-E film, film heater and self-closing;
- The aluminum alloy recessed handle enhances the aesthetic appeal;
- With hot tube for self-evaporation, no need to pour the drainage water;
- Integrated foaming for the cabinet saves 15% energy compared with the spliced foaming;
- The light box panel is easily detachable for the film replacement (top mounted version);
- Adjustable shelves.

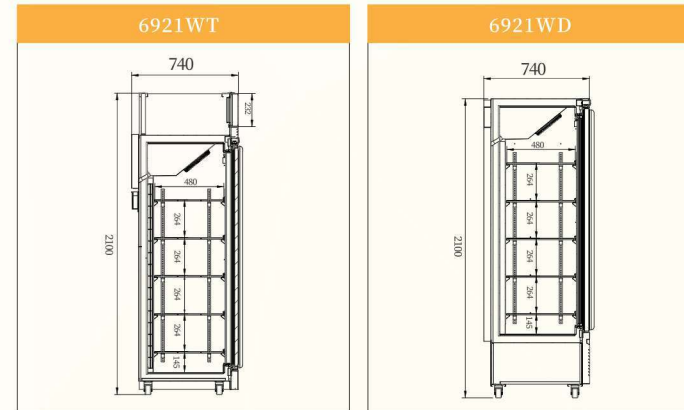


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m²	Net Capacity /L
Plugin Glass Door Freezer Top Mounted	IVGF-2D-6921WT	1250*740*2100	-18~-22	1.10	833
	IVGF-3D-6921WT	1875*740*2100	-18~-22	1.67	1295
Plugin Glass Door Freezer Bottom Mounted	IVGF-2D-6921WD	1250*740*2100	-18~-22	1.10	833
	IVGF-3D-6921WD	1875*740*2100	-18~-22	1.67	1295





Product Features

- High COP compressor & Non-CFC refrigerant;
- Ventilated air cooling with non-defrost;
- Digital controller with temperature display;
- Double tempered glass door with low-E film and self-closing;
- The aluminum alloy recessed handle enhances the aesthetic appeal;
- With hot tube for self-evaporation, no need to pour the drainage water;
- Integrated foaming for the cabinet saves 15% energy compared with the spliced foaming;
- The light box panel is easily detachable for the film replacement (top mounted version);
- Adjustable shelves.

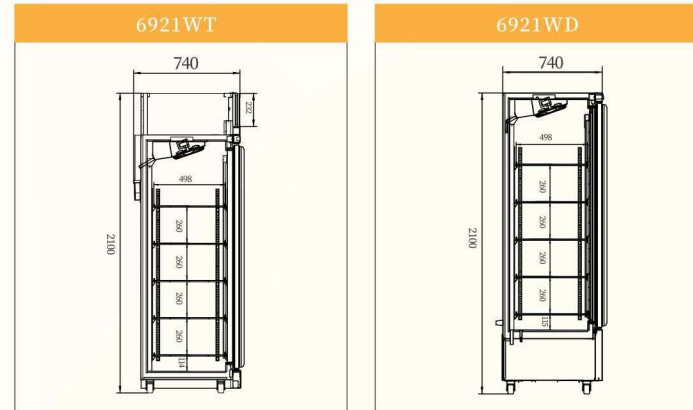



Product series	Model	Dimension / mm (W*D*H)	Temperature Range / °C	TDA / m ³	Net Capacity / L
Plugin Glass Door Chiller Top Mounted	IVGC-2D-6921WT	1250*740*2100	1~10	1.24	1025
	IVGC-3D-6921WT	1875*740*2100	1~10	1.86	1575
Plugin Glass Door Chiller Bottom Mounted	IVGC-2D-6921WD	1250*740*2100	1~10	1.24	1025
	IVGC-3D-6921WD	1875*740*2100	1~10	1.86	1575







Product Features

- Complete product lines from 2-door to 5-door, suitable for various store layouts;
- Electrically heated double insulated tempered glass door;
- With 130mm high light box;
- Higher evaporating temperature of more than -5 degrees Celsius, 5 to 10% energy saving compared with common refrigerated cabinets;
- Ultra-large storage capacity.

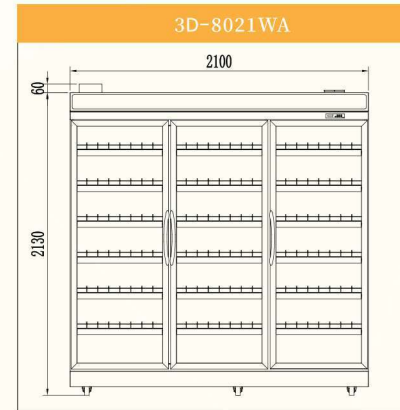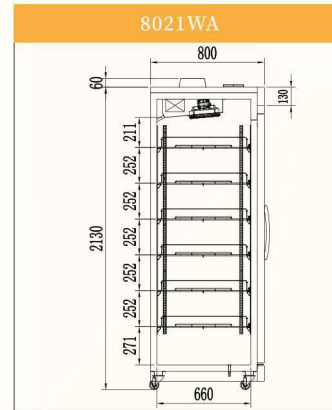


Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ²	Net Capacity /L
Remote Glass Door Chiller	RVGC-2D-8021WA	1400*800*2130	1~10	2.10	1500
	RVGC-3D-8021WA	2100*800*2130	1~10	3.09	2300
	RVGC-4D-8021WA	2800*800*2130	1~10	4.19	3130
	RVGC-5D-8021WA	3500*800*2130	1~10	5.29	3950

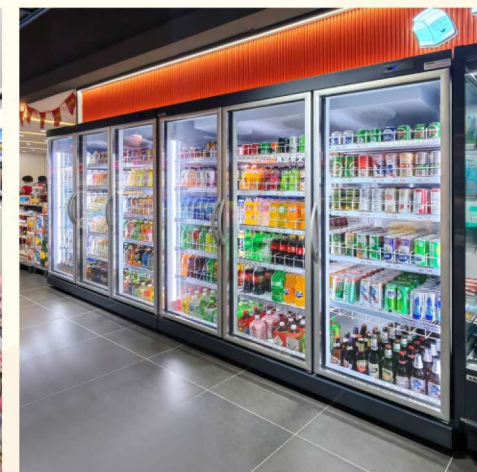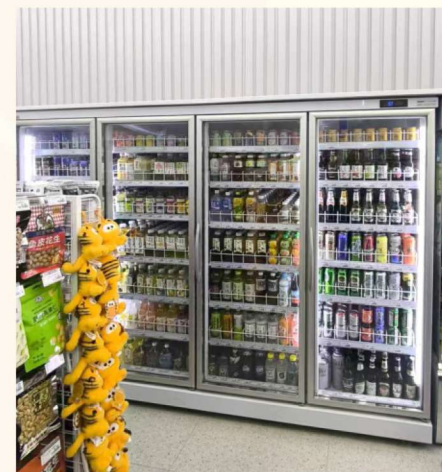



Product Features

- Highly translucent large display light box, the best advertising platform;
- All aluminum alloy door fully transparent glass, with electric heating, no condensation;
- The height of the window design is particularly suitable for children's perspective, increasing the sales display effect;
- Digital controller with temperature display;
- The hot gas defrost system is more energy-saving, the temperature rise inside the cabinet is smaller, and the food preservation effect is better;
- Hot tube self-evaporating, no need to pour water manually;
- Insulated glass door, anti-condensation, good thermal insulation, reducing energy consumption.

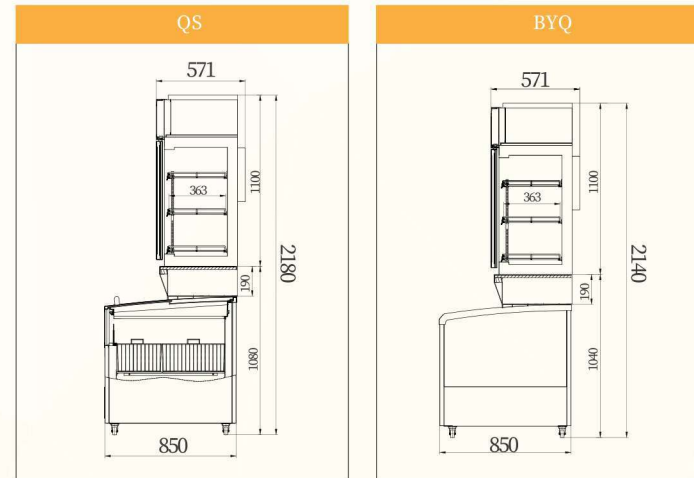

Product series	Model	Dimension / mm (W*D*H)	Temperature Range / °C	TDA / m ³	Net Capacity / L
Top Ice-Cream Freezer	IVGF-1.2-5711WA	1250*565*1100	≤-22	0.57	295
	IVGF-1.5-5711WA	1500*565*1100	≤-22	0.69	362
	IVGF-1.8-5711WA	1860*565*1100	≤-22	0.88	455
Bottom Ice-Cream Freezer (with front view window)	SD485QS-T	1250*850*880	≤-22	0.91	275
	SD585QS-T	1500*850*880	≤-22	1.02	347
	SD785QS-T	1860*850*880	≤-22	1.29	463
Bottom Ice-Cream Freezer (standard version)	SD465BYQ-T	1250*850*850	≤-22	0.77	352
	SD565BYQ-T	1500*850*850	≤-22	0.85	430
	SD765BYQ-T	1860*850*850	≤-22	1.02	540




Dual Temperature Plugin Promotional Island



Product Features

- The air-cooled refrigeration system offers excellent cooling performance, is highly efficient and energy-saving, operates with low noise, and has a long service life;
- The thickened foam layer effectively reduces cold air leakage;
- Double-layer tempered glass locks in cold air, preventing the cold air from leakage;
- The aluminum alloy handrail is high-end and stylish;
- The crash bar design features strong lines that coordinate well with the square appearance of the cabinet.

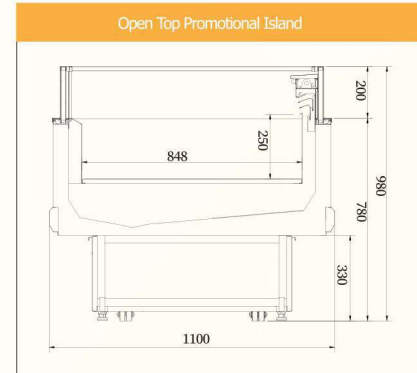

Product series	Model	Dimension/mm (W*D*H)	Temperature Range/°C	TDA/m ³	Net Capacity /L
Dual Temperature Plugin Promotional Island	IHID-1.5-105WS	1530*1050*970	-2~-2/-15~-18	1.87	267
	IHID-2.0-105WS	2030*1050*970	-2~-2/-15~-18	2.43	360
	IHID-2.5-105WS	2530*1050*970	-2~-2/-15~-18	3.00	454
Plugin Promotional Island Chiller	IHIC-1.5-105WS	1530*1050*970	-1~-5	1.87	267
	IHIC-2.0-105WS	2030*1050*970	-1~-5	2.43	360
	IHIC-2.5-105WS	2530*1050*970	-1~-5	3.00	454

Note: This dual-temperature cabinet is configured with dual power cords with 16A 3-pin plug.

