




HCWH Series Horizontal Airflow Cased Chilled / Hot Water Coils




H2O #	Case Width (A)	Case Height (B)	Coil Width (N)	Coil Height (P)	INLET	OUTLET	WEIGHT (LBS)
HCWH-07	17-3/4"	15-3/8"	16"	13-1/2"	5/8"	5/8"	22
HCWH-09	21"	18"	19-1/8"	16-1/8"	7/8"	7/8"	29
HCWH-10	22-1/2"	20"	20-3/8"	18-1/8"	7/8"	7/8"	36
HCWH-12	27"	23"	25-1/8"	21-1/8"	7/8"	7/8"	42
HCWH-15	33-1/2"	28"	30-5/8"	25-1/8"	7/8"	7/8"	61
					DRAIN IS 5/8" IN-OD		

- Insulated Steel Casing
- Sloped Drain Pan
- Sweat Connections
- Coil Drain & Air Vent
- 2 Year Warranty
- Horizontal Airflow
- Simple Installation
- Excellent Performance
- 1/2" Copper Tube .016 WT
- 11 FPI, .006 FT

H2O #	CFM	APD	GPM	Cooling BTU 42° EWT	Cooling BTU 45° EWT	Heating BTU 160 EWT	Heating BTU 180 LWT
HCWH-07	600	.28	4	20,779	18,450	49,321	60,281
		WPD'		1.98	1.98	1.52	1.46
HCWH-09	800	.28	5	24,600	26,973	59,348	71,842
		WPD'		2.29	2.29	1.83	1.76
HCWH-10	1,000	.3	6	34,239	30,401	71,332	86,350
		WPD'		2.45	2.45	1.42	1.36
HCWH-12	1400	.27	7	47,222	41,928	101,084	122,365
		WPD'		3.14	3.14	1.92	1.84
HCWH-15	2000	.22	8	65,489	58,148	145,229	175,804
		WPD'		4.42	4.42	2.77	2.66

HDXH Series Horizontal Airflow DX Coils

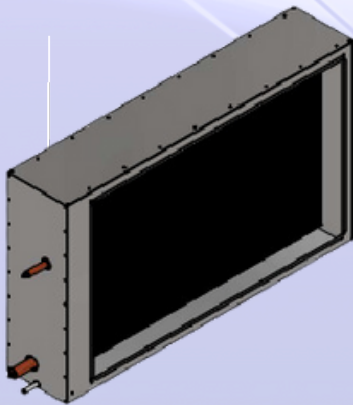

MODEL	CFM	EAT	EWB	APD	BTU TOTAL
HDXH-36	800	80	67	.13	29,030
HDXH-36	1200	80	67	.23	36,100
HDXH-60	1600	80	67	.19	54,820
HDXH-60	2000	80	67	.27	61,610
HDXH-90	3000	80	67	.26	91,540
HDXH-120	4000	80	67	.30	122,190

MODEL	CASE HEIGHT"	CASE WIDTH"	CASE DEPTH"	S/R HEIGHT"	S/R WIDTH"	S"	L"	PAN DRAIN"
HDXH-36	20	30	10	18	24	3/4	3/8	1/2
HDXH-60	24	36	10	22	30	7/8	3/8	1/2
HDXH-90	30	42	10	27	36	1 1/8	7/8	1/2
HDXH-120	30	50	10	27	44	1 3/8	7/8	1/2