


MACHINE SPEC SHEET

D-2536S: Automatic Developing Machines

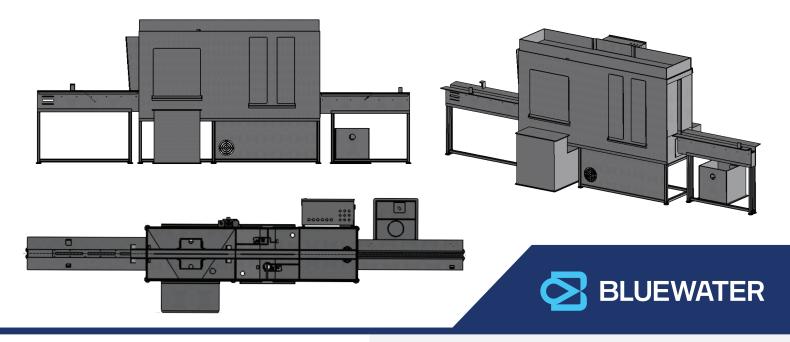

Customer Info	
Company Name	
Customer Name	
Email Address	
Phone Number	
Shipping Address	
Shipping Address	
City	
State	
Zip Code	

Use:

Speed up the developing stage of processing screens with Bluewater's automatic developing machines. The D2536 machines house spray nozzles that deliver a uniform low-pressure wash to remove unexposed emulsion without damaging the stencil image. These easy to operate machines create uniform and high quality screens every time.

Manufacturers Notes:

Installed by Bluewater Technician

Backed by 24 month parts warranty

Made and Manufactured in the USA

Machine Specs	
Infeed Length	54.0" (Included) 72.0" (Upgrade)
Outfeed Length	47.0" (Included) 94.0" (Upgrade)
Dryer	Upgrade)
Outfeed Booth	60.0" (Upgrade)
Air @ 6,9 (100PSI)	6cfm @ 100psi
Electrical	208/230V, 3ph, 34FLA, 50/60Hz (w/o dryer)
	208/230V, 3ph, 46FLA, 50/60Hz (w/ dryer)
Water	1 x 1" NPT Standard Fitting
Drain	3/4" or 1 1/4" NPT Utility Pump
Screens Per Hour	25 Per Hour or (200/8hr shift)
Machine Direction	Left to Right Right to Left
Crate dimensions	146' x 48' x 87'
Shipping weights	1600 Lbs

*Will vary depending on extras (chemical, tanks) ordered

Body Length	96.0"
Standard Body Width	24.0"
Body Width with Recirc	36.0"
Body Height	75.0"
Machine Length (min)	16'6"