




SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

MOLDED FLANGE ADAPTERS

SDR11 - 200PSI/SDR17 - 125PSI

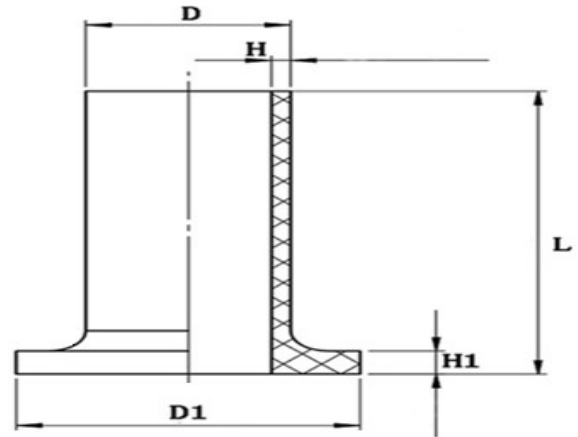

Size (IN)	D	D1	L	H1	H SDR11	H SDR17	Weight (KG) SDR11/SDR17	Part Number
2"	2.375"	3.937"	5.71"	.55"	.216"	.140"	0.2/0.17	MFA02**
3"	3.5"	5"	6"	.67"	.318"	.206"	0.4/0.33	MFA03**
4"	4.5"	6"	6.81"	.79"	.409"	.265"	0.65/0.585	MFA04**
6"	6.625"	8.50"	8"	.80"	.602"	.390"	1.64/1.4	MFA06**
8"	8.625"	10.63"	9"	1.02"	.784"	.507"	3.58/2.77	MFA08**
10"	10.75"	12.75"	10"	1.28"	.977"	.632"	5.06/4.63	MFA010**
12"	12.75"	14.96"	10.75"	1.54"	1.159"	.750"	8.5/6.54	MFA012**
14"	14"	17.50"	12"	1.62"	1.273"	.824"	11.2/8.25	MFA014**
16"	16"	20"	12"	1.85"	1.455"	.941"	15/11.8	MFA016**
18"	18"	21.12"	12"	2.08"	1.636"	1.059"	19.5/13.9	MFA018**
20"	20"	23.50"	12"	2.31"	1.818"	1.176"	24.5/17.7	MFA020**
24"	24"	28"	14"	2.77"	2.000"	1.294"	41/30	MFA024**
28"	28"	32.30"	14"	3.23"	2.182"	1.412"	55.6/40.6	MFA028**
30"	30"	34.30"	14"	3.46"	2.000"	1.294"	64.5/46.6	MFA030**
32"	32"	34.30"	12"	3.69"	1.818"	1.176"	72.7/53.6	MFA032**
36"	36"	40.80"	14"	4.16"	2.000"	1.294"	97/69	MFA036**

(Insert SDR for **)

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513&D-3261 Requirements.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- May also be available in DIPS & metric sizing.*

