
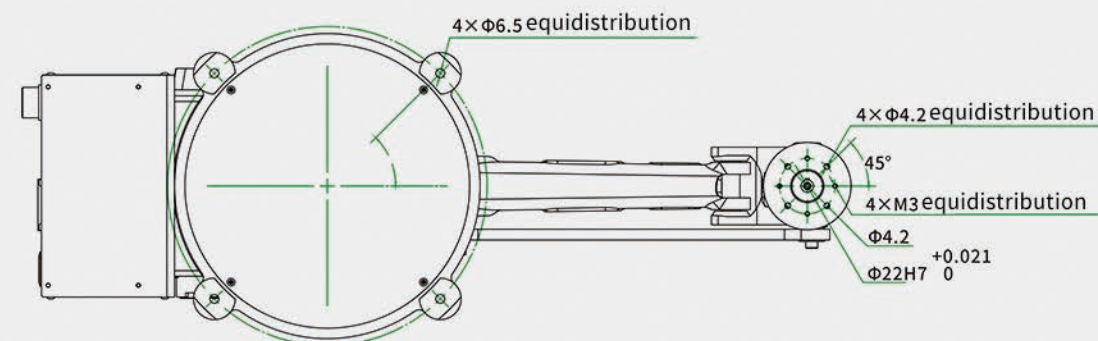
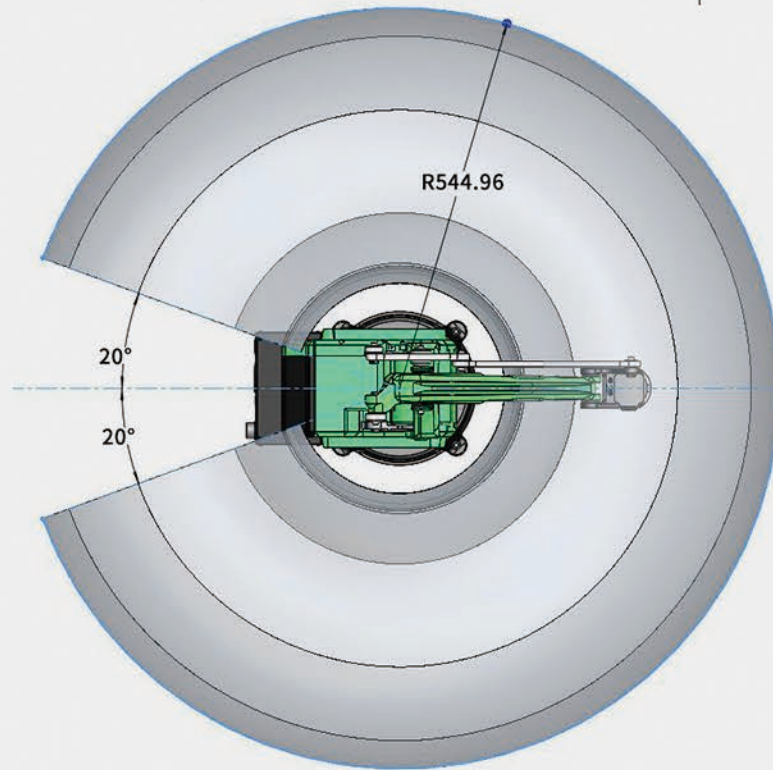


## /WORKING SPACE/

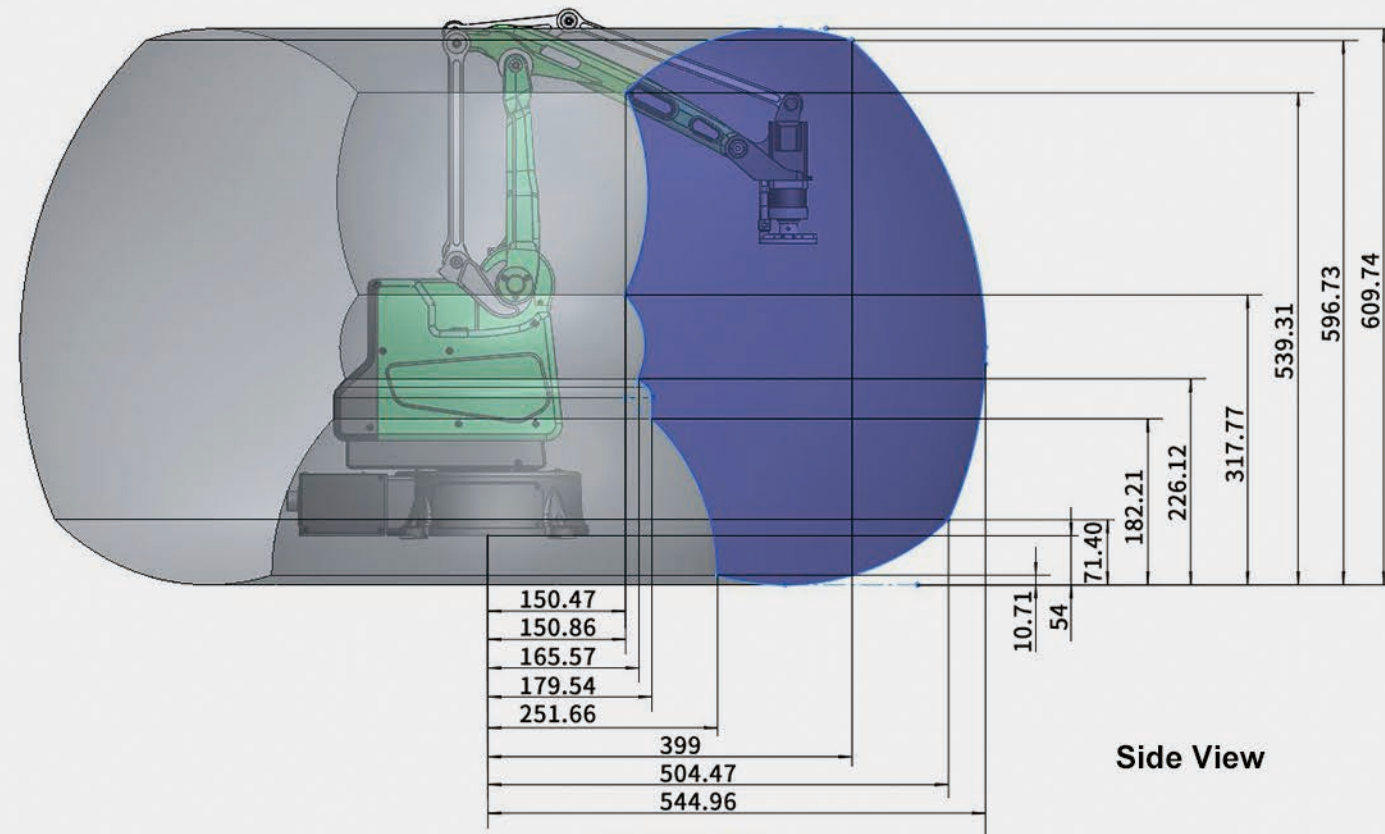

## /SPECIFICATION/

Model	HK5404
Working radius	540mm
Number of axis	3 Axis/4 Axis
Installation	Floor
N.W.	13kg
Position repeatability	±0.05mm
Max payload	1kg
Power supply	Input: Single phase 110V-240V 50Hz Output: DC 24V(400W)
External communication	WIFI/Ethernet
Application	Picking, Loading, Casting, Polishing Etc
Safety standard	ISO 9001-2015
Control software	HULK STUDIO
Drive System	Steper motor
Working condition	-10°C~60°C
I/O	Input 5/Output 5
Working envelope	J 1 ±160° J 2 -42°~85° J 3 -20°~100° J 4 ±160°
Max speed	J 1 360°/s J 2 360°/s J 3 360°/s J 4 500°/s

Disclaimer: The specifications are subject to changes without notice.



### SAVE SPACE

The Hulkbot is one compact robot arm, and designed with an embedded controller. You can now automate in small confined spaces, and improve your production line.

### EASY PROGRAMMING

Install the app on the tablet. You only have to learn some basic commands in order to operate our robot, rather than complicated robot programming language. Do not worry about training courses.

### COST EFFICIENCY

Hulkbot, the affordable industrial robot, helps manufacturers automate repetitive tasks to increase throughput and reduce production costs.



## /SYSTEM CONFIGURATION/

### Standard Included Items

- HK5404
- Power adapter
- Hulkbot(App)
- Emergency stop
- WIFI module
- I/O connector
- Manual (e-edition)



### Peripherals

