


EroVista Column Boot Installation Details

EroVista BP55: 5" x 5-1/2" COLUMN BOOT

MAXIMUM DESIGN LOADS


- VERTICAL: 500 LB (DL)
- SHEAR: 1,000 LB (WL)
- MOMENT: 5,000 FT-LB (WL)
- MAXIMUM BOLT PULL-OUT: 2,500 LB (WL)

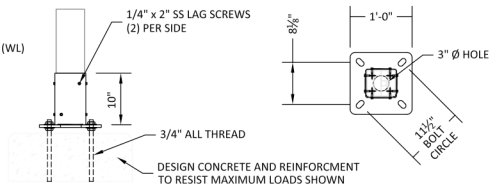

EroVista BP66: 6-3/4" x 6-3/4" COLUMN BOOT

MAXIMUM DESIGN LOADS


- VERTICAL: 500 LB (DL)
- SHEAR: 1,500 LB (WL)
- MOMENT: 10,000 FT-LB (WL)
- MAXIMUM BOLT PULL-OUT: 4,000 LB (WL)

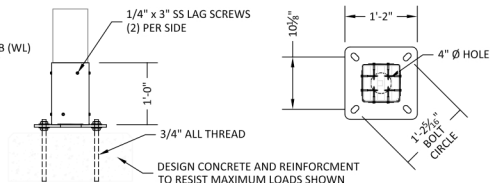

EroVista BP88: 8-1/2" x 8-1/4" COLUMN BOOT

MAXIMUM DESIGN LOADS

- VERTICAL: 700 LB (DL)
- SHEAR: 2,200 LB (WL)
- MOMENT: 17,000 FT-LB (WL)
- MAXIMUM BOLT PULL-OUT: 6,000 LB (WL)

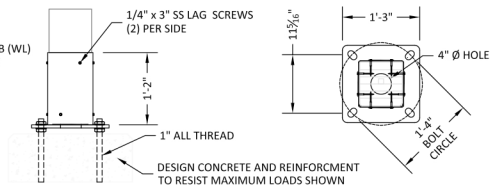


EroVista Column Boot Covers

AC55 - 5" x 5-1/2" COLUMN SKIRT

AC66 - 6-3/4" x 6-3/4" COLUMN SKIRT

AC88 - 8-1/2" x 8-1/4" COLUMN SKIRT



AC skirt placed over BP base plate prior to inserting pole

