

SAVANT LIGHTING

Next-generation lighting from Savant and USAI Lighting.

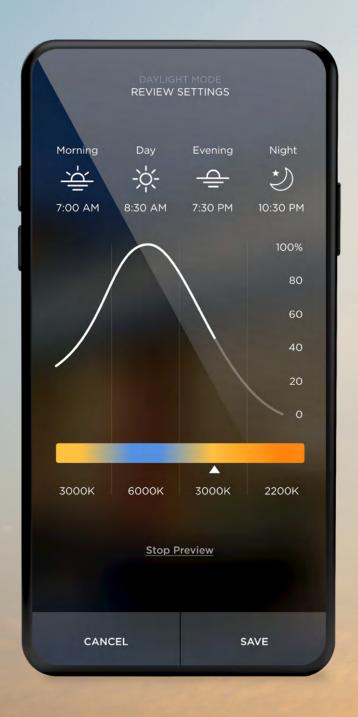



SAVANTIUSAI

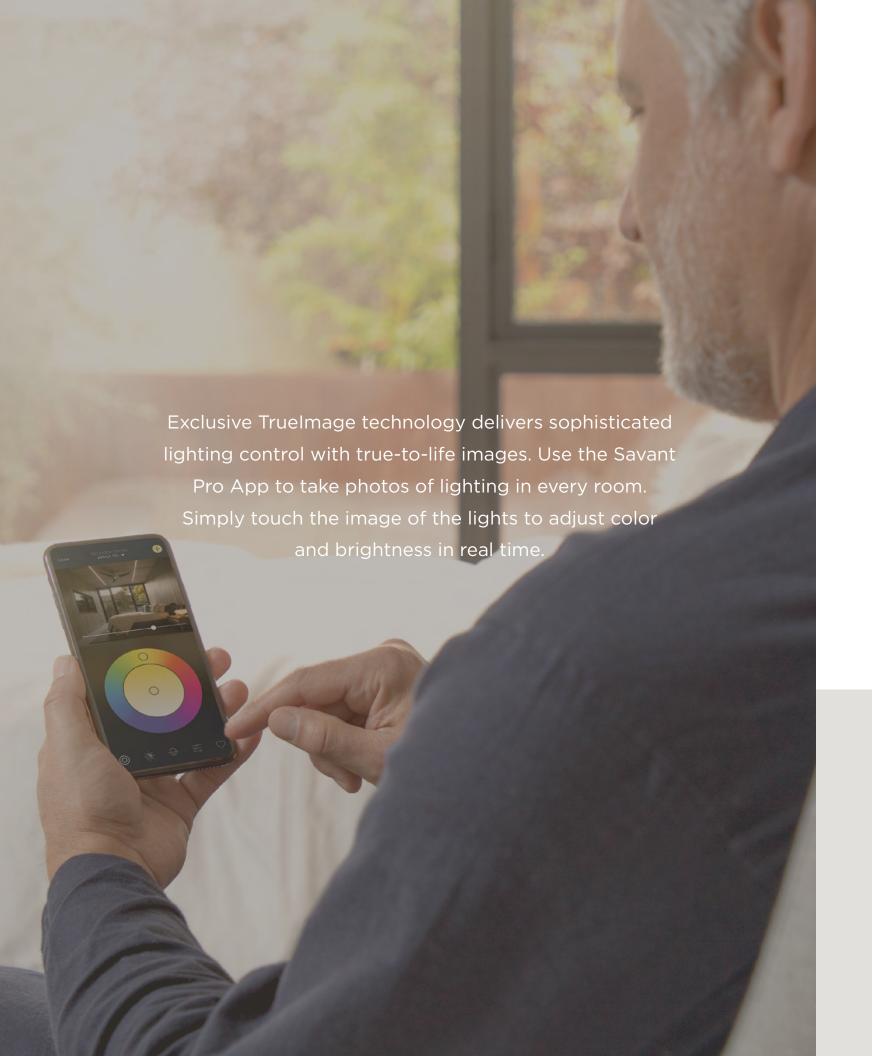

TAKE CHARGE WITH TRUEIMAGE

Use photos to control the lights throughout your home rather than confusing load lists.

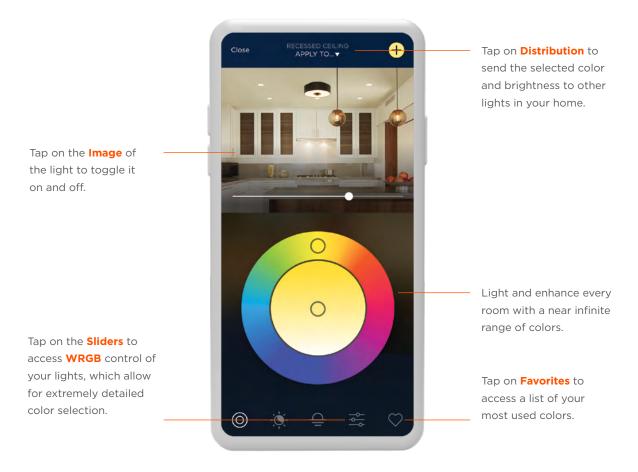











Color Temperature

WRGB Sliders

WRGB Input


Distribution

Favorites

Designed to promote healthy living, your lights will seamlessly transition throughout the day to support your circadian rhythm. Lights will automatically adjust to warmer temperatures in the morning and evening and cooler in the middle of the day.


A PERSONALIZED WELLNESS EXPERIENCE


Designed to promote healthy living, Daylight Mode enables your lights to seamlessly transition throughout the day to support your circadian rhythm.

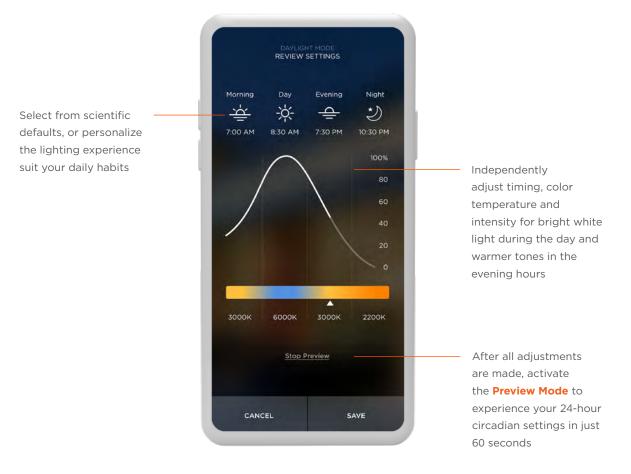












Mode Status

Room Selection

Personalization

Start Preview

Circadian Scenes

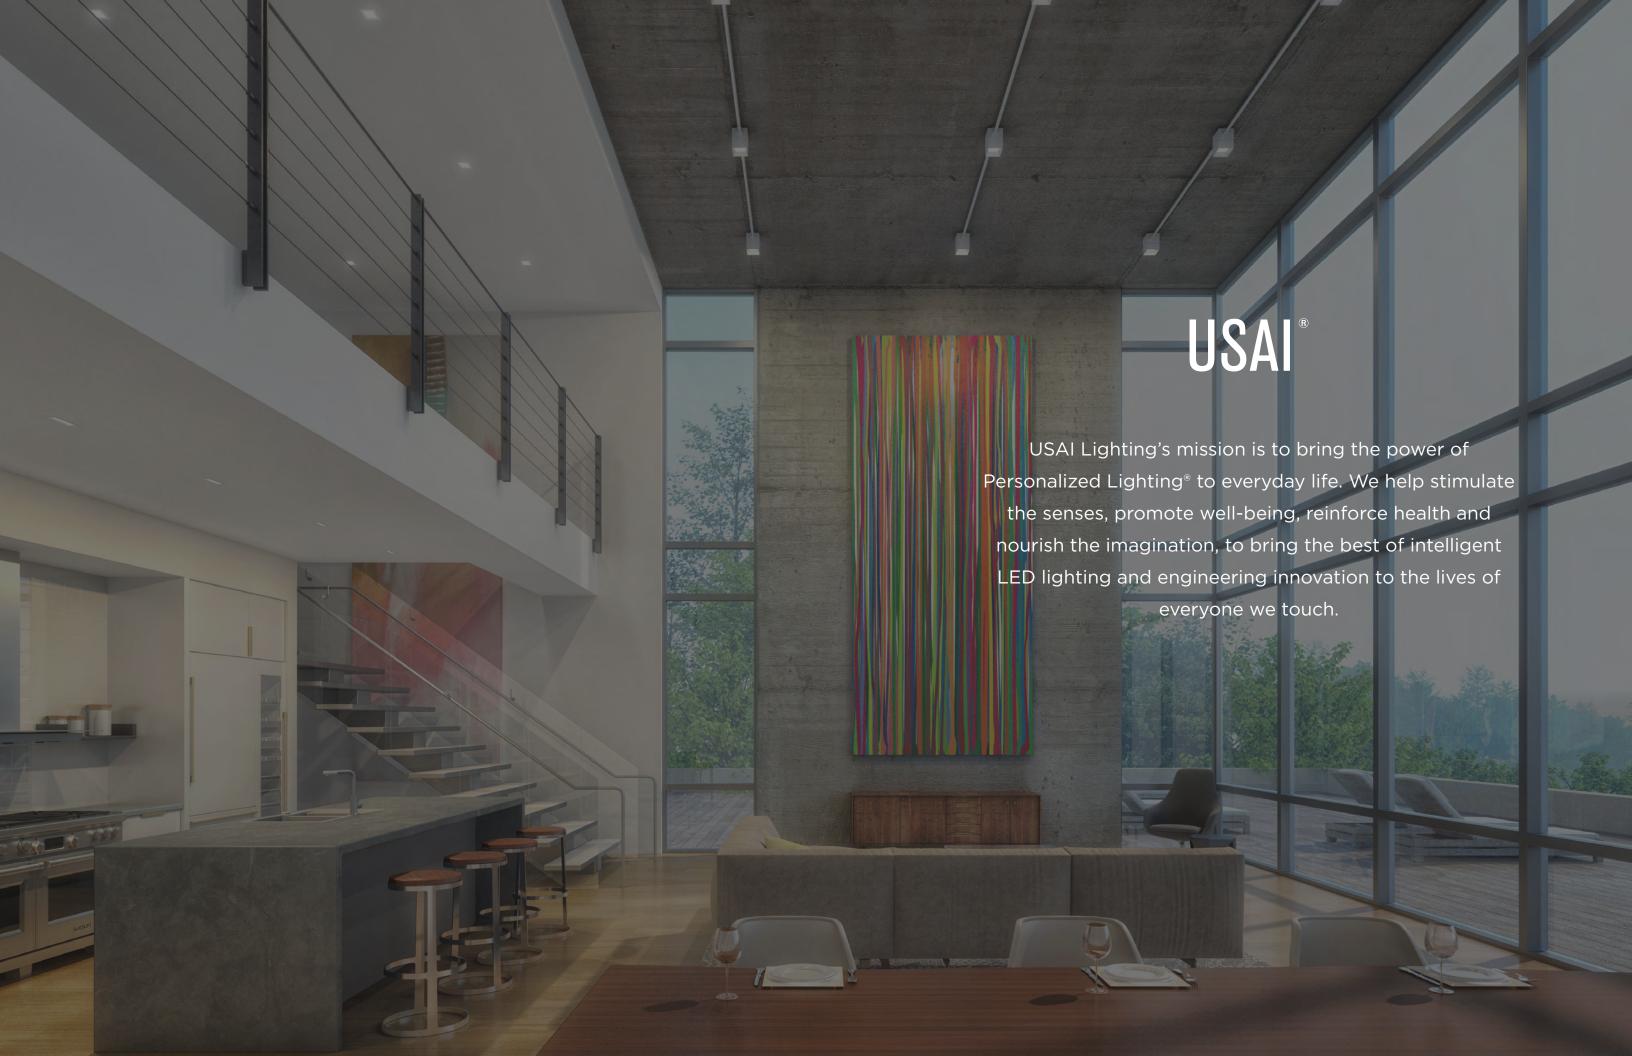

NEW HEIGHTS OF COLOR CONTROL



CLASSIC WHITE

USAI's proprietary Classic White LED light engines provide clean, uniform white light with perfect color consistency from fixture to fixture. You'll see the results in balanced, beautiful white light throughout your space.

Savant Control:

Phased Line Voltage Dimming & 0-10V Low Voltage Dimming down to 1%.

Low Voltage Fixtures can be controlled to off.



WARM GLOW DIMMING

USAI's Warm Glow Dimming provides warmth and glow once only possible in incandescent light sources. Utilizing proprietary technology, Warm Glow Dimming precisely mimics the black body curve of an incandescent lamp by gradually shifting warmer as you dim. The result is virtually indistinguishable from an incandescent light source.

Savant Control:

Phased Line Voltage Dimming & 0-10V Low Voltage Dimming down to 1%. Low Voltage Fixtures can be controlled to off.



COLOR SELECT TUNABLE WHITE

USAI's Color Select tunable white replaces a variety of sources from daylight to candlelight with one fixture type, allowing personalized lighting controls from warm to cool and everything in between, all while maintaining beautiful classic white color consistency and independent control of light level.

Savant Control:

O-10V Low Voltage Dimming (dual) down to 1%. Low Voltage Fixtures can be controlled to off.



INFINITE COLOR+

USAI's Infinite Color+ gives you complete freedom to define your own perfect light, from architectural whites to accents and saturated colors – all with one light fixture. Instead of painting the walls one color, transform your space with light whenever the mood strikes you.

Savant Control:

DMX Digital Low Voltage Dimming down to .01%. Low Voltage Fixtures can be controlled to off.





USAI LIGHTING RECESS 4.5

ROUND TRIMMED

The Recess 4.5 is perfect for residential applications with high ceilings, including applications that call for wall wash and adjustable lighting. It is available across all color technologies plus a variety of styles including both traditional round or modern square styles.

USAI LIGHTING RECESS 4.5

SQUARE TRIMMED



USAI LIGHTING RECESS 4.5 **SQUARE TRIMLESS**

LED COLOR TECHNOLOGY CHOICES

Classic White

• 2700k or 3000k




- CRI: 90+
- 2-Step MacAdam Ellipse
- Title 24/JA8 Options Available

Warm Glow Dimming



- 3000k to 2200k Variable based on Dim Level
- CRI: 90+
- Title 24/JA8 Options Available

Color Select Tunable White



• CRI: 80+ Title 24/JA8 Options Available

- CRI: 90+
- 2700 to 4800K Tunable

Infinite Color+



- Programmable WRGB
- CRI: Variable

TRIM FINISH

White

PREMIUM



Black





Clear Matte Anodized



Metalized Grey



Primer

USE

Recommended for ceiling heights 10 - 20 ft

WATTAGE

- 24 Watts Classic White
- 32 Watts Warm Glow, Color Select, Infinite Color+

DIMMING

- Phased Line Voltage Dimming
- 0-10V Low Voltage Dimming
- DMX Digital Low Voltage Dimming

REGRESS

• 1 inch Regress

SHAPE



4.5" X 4.5" Aperture



4.5" Diameter Aperture

TRIM



Trimmed - For use with all ceiling types.



Trimless - For use in sheetrock and plaster ceilings.



Millwork - For use in wood and stone ceilings.



Sloped Ceiling - Available in Trimmed, Trimless and Millwork for sloped ceiling for 15°-30° and 30°-45° pitch.

FUNCTION



Downlights - Provide general lighting for spaces with smooth, symmetric cones of light for even illumination.



Adjustable Accents - Provide a single beam of light that can be tilted and aimed to place light precisely where you need it.



Wall Wash - Great for providing vertical illumination on a feature wall, highlighting art and architectural features.

HOUSING



Flat Housing - Smallest available, also available IC-rated for direct contact with insulation.



New Construction - Narrow Width Housing.



Retrofit Housing - for use in existing ceilings.



New Construction / IC Rated Housing - All-in-one universal housing for direct contact with insulation.



Sloped Ceiling / IC Rated Housing - Lockable tilt settings designed for sloped ceilings and direct contact with insulation.

Color Technology and Housing Style selections can impact driver location. Refer to specification sheets for details.






USAI LIGHTING RECESS 3

SQUARE TRIMMED

Good things come in small packages. Recess 3 has an aperture of only 3", and is available across all color technologies, including Tunable White and Infinite Color+. It is available in a wide array of trim finishes and housing options, making it a perfect fit for both new construction and retrofit projects.

USAI LIGHTING RECESS 3

SQUARE TRIMLESS

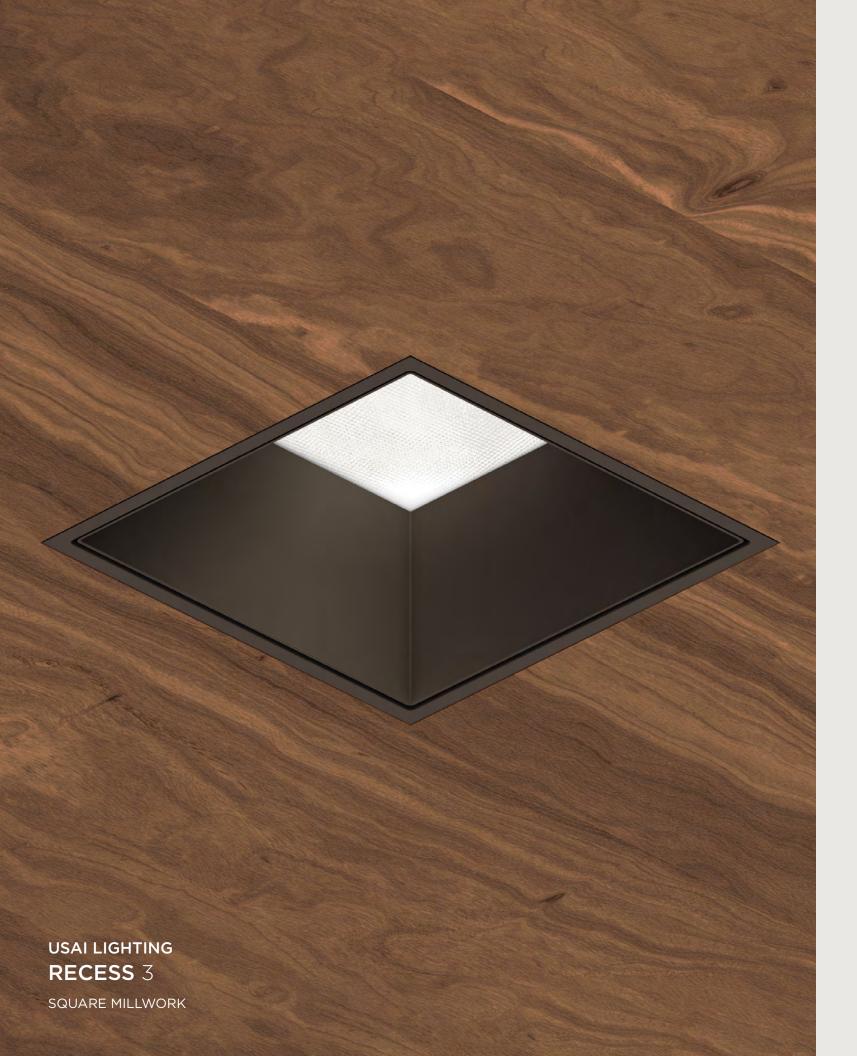

Classic White

• 2700k or 3000k



- CRI: 90+
- 2-Step MacAdam Ellipse
- Title 24/JA8 Options Available

Warm Glow Dimming



- 3000k to 2200k Variable based on Dim Level
- CRI: 90+
- Title 24/JA8 Options Available

Color Select Tunable White



- 2200 to 6000K Tunable
- CRI: 80+

Title 24/JA8 Options Available

- CRI: 90+
- 2700 to 4800K Tunable

Infinite Color+



- Programmable WRGB
- CRI: Variable

TRIM FINISH

White

PREMIUM



Black



Statuary Bronze



Black Anodized



Metalized Grey

Clear Matte Anodized



Primer

USE

Recommended for ceiling heights 8 - 14 ft

WATTAGE

- 14 Watts Classic White
- 18 Watts Warm Glow, Color Select, Infinite Color+

DIMMING

- Phased Line Voltage Dimming
- 0-10V Low Voltage Dimming
- DMX Digital Low Voltage Dimming

REGRESS

• 1 inch Regress

SHAPE



3" X 3" Aperture



3" Diameter Aperture

TRIM



Trimmed - For use with all ceiling types.



Trimless - For use in sheetrock and plaster ceilings.



Millwork - For use in wood and stone ceilings.



Sloped Ceiling - Available in Trimmed, Trimless and Millwork for sloped ceiling for 15°-30° and 30°-45° pitch.

FUNCTION



Downlights - Provide general lighting for spaces with smooth, symmetric cones of light for even illumination.



Adjustable Accents - Provide a single beam of light that can be tilted and aimed to place light precisely where you need it.



Wall Wash - Great for providing vertical illumination on a feature wall, highlighting art and architectural features.

HOUSING



Flat Housing - Smallest available.



Flat / IC Rated - Smallest available for direct contact with insulation.



Retrofit Housing - for use in existing ceilings.



New Construction - All-in-one universal housing.





New Construction / IC Rated Housing - All-in-one universal housing for direct contact with insulation.



Sloped Ceiling / IC Rated Housing - Lockable tilt settings designed for sloped ceilings and direct contact with insulation.

Color Technology and Housing Style selections can impact driver location. Refer to specification sheets for details.

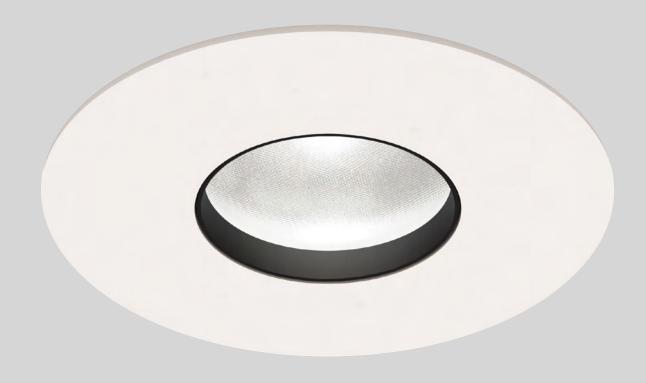

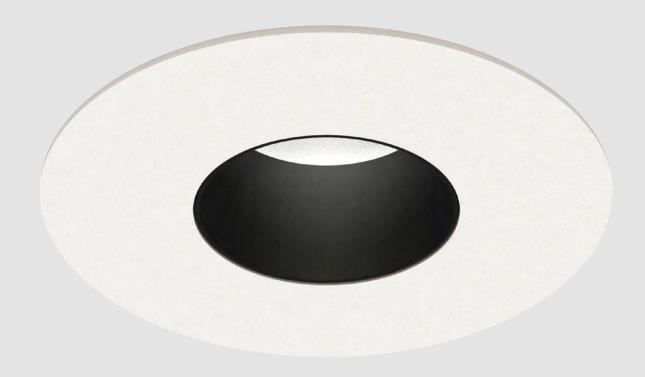

USAI LIGHTING RECESS PINHOLE

1/4 INCH REGRESS ROUND, TRIMMED

The Recess Pinhole is the ideal fixture for traditional applications that need modern efficiency and the lifetime benefits of LED Lighting. Providing a true point source solution, it is the highest performing recessed LED pinhole available.

USAI LIGHTING RECESS PINHOLE

1 INCH REGRESS ROUND, TRIMMED



Classic White



- 2700k or 3000k
- CRI: 90+
- 2-Step MacAdam Ellipse
- Title 24/JA8 Options Available

Warm Glow Dimming



- 3000k to 2200k Variable based on Dim Level
- CRI: 90+

TRIM FINISH

White

vvnite

PREMIUM



Black



Statuary Bronze



Metalized Grey



Primer

USE

Recommended for ceiling heights 8 - 14 ft

WATTAGE

DIMMING

• 15 Watts - Classic White

• 16 Watts - Warm Glow

, vvaces vvariii e

Phased Line Voltage Dimming

• 0-10V Low Voltage Dimming

REGRESS

• 1/4 inch Regress

• 1 inch Regress

SHAPE



1.75" X 1.75" Aperture



1.75" Diameter Aperture

TRIM



Trimmed - For use with all ceiling types.



Flush Mount - For use in sheetrock and plaster ceilings.

FUNCTION



Downlights - Provide general lighting for spaces with smooth, symmetric cones of light for even illumination.



Adjustable Accents - Provide a single beam of light that can be tilted and aimed to place light precisely where you need it.



Wall Wash - Great for providing vertical illumination on a feature wall, highlighting art and architectural features.

HOUSING



New Construction - All-in-one universal housing, also available IC Rated for direct contact with insulation.



USAI LIGHTING RECESS PINHOLE

1/4 INCH REGRESS SQUARE TRIMMED





USAI LIGHTING
RECESS MULTICELL

4 CELL TRIMMED



USAI LIGHTING RECESS MULTICELL

8 CELL TRIMMED

LED COLOR TECHNOLOGY CHOICES

Classic White

• 2700k or 3000k

• CRI: 90+

• 2-Step MacAdam Ellipse

FLANGE FINISH OPTIONS



PREMIUM




BEVEL FINISH OPTIONS




PREMIUM













USE

Recommended for ceiling heights 8 - 20 ft

WATTAGE

•8 Watts - 2 cell

• 13 Watts - 4 cell • 27 Watts - 8 cell

DIMMING

Phased Line Voltage Dimming

• 0-10V Low Voltage Dimming

SIZE

2 cell - 1.25" x 2.5" Aperture



4 cell - 1.25" x 5" Aperture



8 cell - 1.25" x 10" Aperture

TRIM



Trimmed - For use with all ceiling types.



Trimless - For use in sheetrock and plaster ceilings.



Millwork - For use in wood and stone ceilings.

FUNCTION



Downlights - Provide general lighting for spaces with smooth, symmetric cones of light for even illumination.



Adjustable Accents - Provide a single beam of light that can be tilted and aimed to place light precisely where you need it.



Wall Wash - Great for providing vertical illumination on a feature wall, highlighting art and architectural features.

HOUSING



Remote Driver Housing - smaller for use with remotely located driver.





6" WITH CABLE

Power and beauty are both in play with our sleek architectural cylinders. Cylinder 3 offers a beautiful solution for open or inaccessible ceilings and architectural accents - and allows for either a surface or cable mount installation.



USAI LIGHTING CYLINDER 3

10" SURFACE MOUNT WITH GLOW GLASS



Classic White

• 2700k or 3000k



• CRI: 90+

• CRI: 90+

• 2-Step MacAdam Ellipse

Warm Glow Dimming

• 3000k to 2200k Variable based on Dim Level

• CRI: 90+

FINISH

White

PREMIUM

Black









Satin Nickel

USE

Use as a pendant or surface mount fixture

WATTAGE

- 14 Watts, Classic White, 6" long cylinder
- 20 Watts, Classic White, 10" long cylinder
- 18 Watts, Warm Glow Dimming, 10" long cylinder

DIMMING

- Phased Line Voltage Dimming
- 0-10V Low Voltage Dimming

SHAPE



3" Diameter Aperture

MOUNT



Surface mount to recessed junction box



48" cable, recessed junction box



48" cable, surface junction box + conduit



96" cable, recessed junction box



96" cable, surface junction box + conduit

FUNCTION



Downlights - Provide general lighting for spaces with smooth, symmetric cones of light for even illumination.

OPTIONS



Surface Mount Downlight 6" and 10" Lengths



Cable Mount Pendant 6" and 10" Lengths



Surface Mount Glow Glass 6" and 10" Lengths



Cable Mount Glow Glass Pendant 6" and 10" Lengths





ROUND SURFACE MOUNT

The Block 5 works with any surface or ceiling height, including exposed conduit applications, with no sacrifice in aesthetics. The Block 5 offers a complete solution, with both downlight and wall wash options available in round and square shapes.



USAI LIGHTING BLOCK 5

SQUARE SURFACE MOUNT



Classic White



- 2700k or 3000k
- CRI: 90+
- 2-Step MacAdam Ellipse
- Title 24/JA8 Options Available

Warm Glow Dimming



- 3000k to 2200k Variable based on Dim Level
- CRI: 90+

FINISH

PREMIUM



Black

White



Statuary Bronze



Metalized Grey



Conduit Silver

USE

• Recommended for ceiling heights 12 - 20 ft

WATTAGE

DIMMING

• 24 Watts - Classic White • 16 Watts - Warm Glow

• Phased Line Voltage Dimming

• 0-10V Low Voltage Dimming

SHAPE



5.75" Diameter Aperture



5.25" x 5.25" Aperture

FUNCTION



Downlights - Provide general lighting for spaces with smooth, symmetric cones of light for even illumination.



Wall Wash - Great for providing vertical illumination on a feature wall, highlighting art and architectural features.

OPTIONS



Surface Mount - recessed junction box.





Conduit Cut Out Mount - surface junction boxes and conduit.





CORE RECESS 4.5

USE	Recommended for ceiling heights 10 - 20 ft
LED COLOR TECHNOLOGY	Classic White 2700k & 3000k, CRI: 90+, 2-Step MacAdam Ellipse
TRIM FINISH	White
DIMMING	Phased Line Voltage Dimming & 0-10V Low Voltage Dimming
SHAPE	Square & Round
TRIM	Trimmed - For use with all ceiling types.
FUNCTION	Downlights, Adjustable Accents & Wall Wash
HOUSING	New Construction, New Construction IC Rated



CORE RECESS 3


USE	Recommended for ceiling heights 8- 14 ft
LED COLOR TECHNOLOGY	Classic White 2700k & 3000k, CRI: 90+, 2-Step MacAdam Ellipse, Title 24/JA8 Options Available
TRIM FINISH	White
DIMMING	Phased Line Voltage Dimming & 0-10V Low Voltage Dimming
SHAPE	Square & Round
TRIM	Trimmed - For use with all ceiling types.
FUNCTION	Downlights, Adjustable Accents & Wall Wash
HOUSING	New Construction, New Construction IC Rated



CORE PINHOLE

USE	Recommended for ceiling heights 8- 14 ft
LED COLOR TECHNOLOGY	Classic White 2700k & 3000k, CRI: 90+, 2-Step MacAdam Ellipse
TRIM FINISH	White
DIMMING	Phased Line Voltage Dimming & 0-10V Low Voltage Dimming
SHAPE	Square & Round
TRIM	Trimmed - For use with all ceiling types.
FUNCTION	Downlight 1/4 Regress & Wall Wash
HOUSING	New Construction



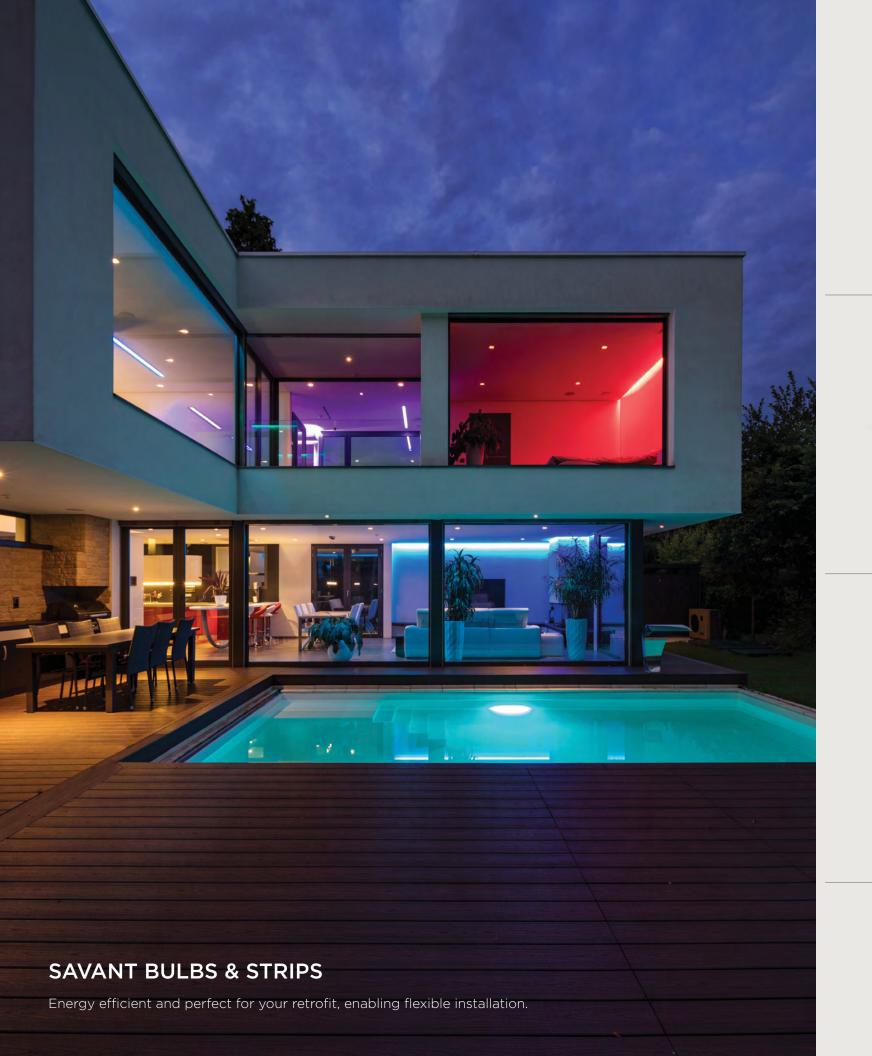



419	SMART	BULB
$\neg \Box$	SIMAILI	DOLD

LIFE	Up to 20 years	
LUMENS	800+ Lumens	
WATTAGE	10 W	
CRI	Variable	
CONNECTION	Standard Edison socket for indo	or use
FEATURES	Dimmable Bluetooth Communication Bulb Mode	White Temperatures from 2000k - 8000kOver 16 million Colors



BR30 INDOOR & OUTDOOR SMART BULB

LIFE	Up to 20 years	
LUMENS	1100+ Lumens	
WATTAGE	14 W	
CRI	Variable	
CONNECTION	Standard Edison socket for indoc	or or outdoor use
FEATURES	DimmableBluetooth CommunicationBulb Mode	White Temperatures from 2000k - 8000kOver 16 million Colors



COLOR LED SMART STRIP 2M STARTER KIT

LIFE	Up to 20 years	
LUMENS	1500+ Lumens	
WATTAGE	1-30 W	
CRI	Variable	
CONNECTION	Standard Power Outlet	
FEATURES	Dimmable Bluetooth Communication Bulb Mode	White Temperatures from 2000k - 8000kOver 16 million Colors
AVAILABLE ACCESSORIES	1M Smart Strip Extension	

Bluetooth Communication - For use with the Savant Pro App, one gateway must be within 30ft of bulb/strip. Gateways include Savant Lamp Controller, Metropolitan and Echo Keypads, Dimmers, Switches, and Fan Controllers.

Bulb Mode - Can be used with Metropolitan and Echo Keypads, Dimmers or Switches in Bulb Mode, which keeps continuous power to the Smart Bulb, so it can always be controlled via voice or the Savant Pro App.



LED COLOR TECHNOLOGY

Tunable White

- 2400k to 6500k Tunable
- CRI: 80+

USE	Indoor
WATTAGE	14.5W/M
DIMMING	DMX Digital Low Voltage Dimming
LUMENS	1,100 per meter
AVAILABLE ACCESSORIES	 DMX Driver with Integrated Power Supply (recommended for lengths less than 5M) DMX Driver with 10A External Power Supply (recommended for 5M to 10M lengths) 3 Way T Couplers Straight Couplers 5 Inch Jumpers 1 Meter Mounting Rails



LED COLOR TECHNOLOGY

Programmable WRGB

• CRI: Variable

USE	Indoor
WATTAGE	23W/M
DIMMING	DMX Digital Low Voltage Dimming
LUMENS	1,000 per meter
OUTDOOR RATING	IP65
AVAILABLE ACCESSORIES	 DMX Driver with Integrated Power Supply (recommended for lengths less than 5M) DMX Driver with 10A External Power Supply (recommended for 5M to 10M lengths) 3 Way T Couplers Straight Couplers 5 Inch Jumpers 1 Meter Mounting Rails



LED COLOR TECHNOLOGY

Programmable WRGB

• CRI: Variable

USE	Outdoor
WATTAGE	23W/M
DIMMING	DMX Digital Low Voltage Dimming
LUMENS	700 per meter
AVAILABLE ACCESSORIES	 DMX Driver with Integrated Power Supply (recommended for lengths less than 5M) DMX Driver with 10A External Power Supply (recommended for 5M to 10M lengths) 3 Way T Couplers Straight Couplers

5 Inch Jumpers1 Meter Mounting Rails



LED COLOR TECHNOLOGY

Programmable WRGB

• CRI: Variable

USE	Indoor/Outdoor
WATTAGE	23W/M
DIMMING	DMX Digital Low Voltage Dimming
LUMENS	700 per meter
OUTDOOR RATING	IP67
AVAILABLE ACCESSORIES	 DMX Driver with Integrated Power Supply (recommended for lengths less than 5M) DMX Driver with 10A External Power Supply (recommended for 5M to 10M lengths) Accessory Pack with: Mounting Clips Jumpers

Couplers



savant.com

© 2021 Savant Systems, Inc. All rights reserved