



工程机械车轮

车轮确保所有车轮的设计、制造、油漆和测试都达到最高标准，以确保车轮的性能、耐用性和价值。

车轮单件和多件系列车轮，适用于工程机械行业，充分利用高强度低合金 (HSLA) 钢材。

多件式轮辋关键部件均采用热处理成型材料。轮辋均采用自动对焊焊接；所有的环焊缝都经过无损检测，以确保零缺陷。



规格	型号	TT (有内胎) or TL (无内胎)	件数	类型 (N - 普通型, H - 重型, L - 轻型, O - 其他, D - 开发)	配用轮胎
15	5.0-15	TT	2	N	7.00-15
	5.5-15	TT	2	N	7.00-15
	6.0-15	TT	2	N	8.25-15
	6.5-15	TT	2	N	7.50-15
	7x15	TL	1	N	250-15
	7.00-15	TT	2	N	9.00R15
	7.5-15	TT	2	N	250-15
	8.0-15	TT	2	N	300-15
	9.75-15	TT	2	N	355/65-15
16	16-6.00G	TT	2	N	7.5-16
	16x6LB	TL	1	N	7.5-16
	16x8LB	TL	1	N	10-16
16.5	16.5x8.25	TL	1	N	10-16.5
	16.5x9.75	TL	1	N	12-16.5
	16.5x12.00	TL	1	N	15.5-16.5
17.5	17.5x10.5	TL	1	N	14-17.5
18	18x9	TL	1	N	10.5-18
	18x11	TL	1	N	12.5-18
	18x13	TL	1	N	15.5-18
19.5	19.5x6.75	TL	1	N	245/70R19.5
	19.5x7.50	TL	1	N	265/70R19.5
	19.5x8.25	TL	1	N	285/70R19.5
	19.5x11.75	TL	1	N	385/55R19.5
	19.5x13.00	TL	1	N	445/65R19.5
20	19.5x14.00	TL	1	N	445/45R19.5
	6.5-20	TT	2	H	7.50-20
	7.00T-20	TT	2	N	9.00-20

	7.50V-20	TT	2	N	10.00-20
	7.5-20	TT	2	N	10.00-20
	20-7.5/1.7	TL	3	N	10.00-20
	8.00V-20	TT	2	N	11.00-20
	8.00TG-20	TT	3	N	11.00-20
	8.5-20	TT	2	N	11.00-20
	9.0-20	TT	2	N	12.00-20
	20-10.0/1.7	TL	3	N	14.00-20
	20-10.5/1.7	TL	3	N	14.00-20
	20-11.25/2.0	TL	3	N	16.00-20
	11.00TG-20	TT	3	N	14/70-20
	20x11	TL	1	N	365/80R20
21	20x13	TL	1	N	405/70R20
	21-17.00/1.5	TL	3	N	24.00-21
22.5	21-18.00/1.5	TL	3	N	24.00-21
	22.5x8.25	TL	1	N	285/60R22.5
	22.5x9.00	TL	1	N	315/60R22.5
	22.5x11.75	TL	1	N	375/80R22.5
	22.5x12.25	TL	1	N	405/70R22.5
	22.5x13.00	TL	1	N	425/65R22.5
	22.5x13.00	TL	1	H	445/65R22.5
	22.5x14.00	TL	1	N	445/65R22.5
24	22.5x16.00	TL	1	N	500/50R22.5
	24-8.50	TT	2	N	11.00-24
	24-10.00	TT	3	N	14.00-24
	24-11.75	TT	3	N	16.00-24
	24x10	TL	1	H	12.00-24
	24x13	TL	1	N	14.9-24
	24xDW14L	TL	1	N	16.9-24
	24xDW15L	TL	1	N	16.9-24 or 18.4-24
25	24xDW16L	TL	1	N	18.4-24
	25x10.00	TL	1	D	13.0-25
	25x12.00	TL	1	D	15.5-25
	25x13.00	TL	1	D	17.5-25
	25x14.00	TL	1	N	17.5-25
	25-10.00/1.5	TL	3	N	14.00-25
	25-11.25/2.0	TL	5	N	16.00-25
	25-12.00/1.3	TL	3	N	15.50-25
	25-13.00/2.5	TL	3	N	18.00-25
	25-13.00/2.5	TL	5	H	18.00-25
	25-14.00/1.5	TL	3	N	17.50-25
	25-15.00/3.0	TL	5	N	21.00-25
	25-17.00/1.7	TL	3	N	20.5-25
	25-17.00/2.0	TL	5	N	20.5-25
	25-19.50/2.5	TL	3	N	23.5-25
	25-19.50/2.5	TL	5	N	23.5-25
	25-22.00/3.0	TL	3	N	26.5-25
	25-22.00/3.0	TL	5	N	26.5-25
	25-24.00/3.0	TL	5	N	30.0-25
	25-25.00/3.5	TL	3	N	29.5-25
	25-25.00/3.5	TL	5	N	29.5-25
	25-30.00/1.5	TL	3	N	67x34.00-25
26	25-36.00/1.5	TL	3	N	66x44.00-25
	26xDW16A	TL	1	N	18.4-26
	26xDW20A	TL	1	N	23.1-26
	26xDW25A	TL	1	N	28-26
28	28x10.00GR	TL	1	N	13.00-28
30	30xDW16	TL	1	N	18.4-30
32	32xDW21A	TL	1	N	650/75R32
	32xDW27A	TL	1	N	800/65R32




工业车轮

车轮的工业车轮用于叉车，港口设备，地面支持设备，堆垛机和起重机。

以上多件式车轮、重载车轮、对开式车轮、单件式车轮等均按 TRA、ETRTO、JATMA 标准设计生产。关键零件全部采用热成型钢，我们采用创新的成型工艺，以确保最高的性能和耐久性，为客户实现成本效益。



规格	型号	TT (有内胎) or TL (无内胎)	件数	类型 (N - 普通型, H - 重型, L - 轻型, O - 其他, D - 开发)	配用轮胎
8	3.00D-8	TL	split	N	15*4 1/2-8
	3.00D-8	TT	3	N	15*4 1/2-8
	3.00D-8	TT	4	N	15*4 1/2-8
	4.33R-8	TT	split	N	18*7-8
	4.33R-8	TT	3	N	18*7-8
9	3.50D-9	TL	split	N	6.00-9
	4.00E-9	TL	split	N	6.00-9
	4.00E-9	TT	3	N	6.00-9
	4.00E-9	TT	4	N	6.00-9
	6.00E-9	TT	3	N	21*8-9
	6.00E-9	TT	4	N	21*8-9

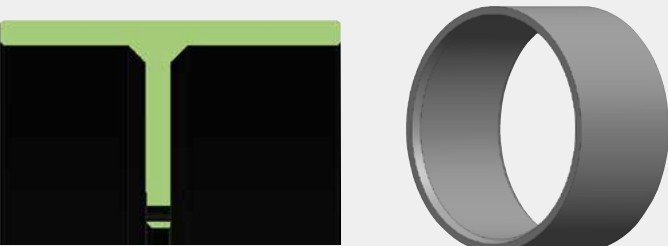10	5.00F-10	TL	split	N	6.50-10
	5.00F-10	TT	2	N	6.50-10
	5.00F-10	TT	4	N	6.50-10
	6.50F-10	TL	split	N	23*9-10
	6.50F-10	TT	2	N	23*9-10
	6.50F-10	TT	4	N	23*9-10
12	5.00S-12	TL	split	N	7.00-12
	5.00S-12	TT	2	N	7.00-12
	5.00S-12	TT	4	N	7.00-12
	8.00G-12	TT	2	N	23x10-12
14.5	14.5x7.00MH	TL	1	N	9.00-15
	14.5x7.00MH	TL	1	N	9.00-15
15	7.00-15	TT	2	N	9.00-15
	7.50-15	TT	2	N	250-15
16	6.00G-16	TT	2	N	7.5R16
20	20x11	TL	1	N	365/80R20
	20x13	TL	1	N	405/70R20
24	24x9	TL	1	N	10.00-R24
	24x13	TL	1	N	14.9-24
24.5	24.5x11.75	TL	1	N	355/55D24.5
	24.5x15.00	TL	1	N	355/55D24.5
25	25-11.25/2.0	TL	5	H	16.00-25
	25-13.00/2.5	TL	5	H	18.00-25
	25-15.00/3.0	TL	5	H	21.00-25
辐板圈	直径范围: 4"~30" 宽度范围: 4"~20" 定制或开发 				
压配圈	直径范围: 4"~30" 宽度范围: 4"~20" 定制或开发 				





矿业车轮


车轮矿业车轮的设计和生适用于从事矿山运输车辆、矿车、重型装载机、重型车轮推土机、矿车自卸车等矿用专用轮式车辆。

为了在复杂的工作环境中提供最好的性能，最关键的部件采用锻造材料，并且大多数部件都经过精密加工，使用林肯焊接设备和无损探伤来防止焊接缺陷。



规格	型号	TT (有内胎) or TL (无内胎)	件数	类型 (N - 普通型, H - 重型, L - 轻型, O - 其他, D - 开发)	配用轮胎
15	15-11	TT	3	H	14.00-15
16.5	16.5x8.25	TL	1	H	10-16.5
	16.5x9.75	TL	1	H	12-16.5
22.5	22.5x9.00	TT	1	H	12R22.5
25	25-19.50/2.5	TL	5	H	23.5-25
	25-22.00/3.0	TL	5	H	26.5-25
	25-25.00/3.5	TL	5	H	29.5-25
29	29-17.00/3.5	TL	5	H	24.0-29
	29-22.00/3.0	TL	5	H	26.5-29
	29-24.00/3.0	TL	5	H	29.5-29
	29-25.00/3.5	TL	5	H	29.5-29
	29-27.00/3.5	TL	5	H	32.0-29
33	33-13.00/2.5	TL	5	H	18.00-33
	33-17.00/3.5	TL	5	H	24.00-33
	33-22.00/4.0	TL	5	H	27.00-33
	33-28.00/3.5	TL	5	H	35/65-33
35	35-15.00/3.0	TL	5	H	18.00-35
	35-17.00/3.5	TL	5	H	21.00-35
	35-27.00/3.5	TL	5	H	33.25-35
	35-31.00/4.0	TL	5	H	37.25-35
39	39-28.00/4.0	TL	5	H	33.50-39
	39-32.00/4.0	TL	5	H	40.00-39
	39-32.00/4.5	TL	5	H	41.25-39
45	45-36.00/4.5	TL	5	H	45.00-45
49	49-17.00/3.5	TL	5	H	24.00-49
	49-19.50/4.0	TL	5	H	27.00-49
51	51-22.00/4.5	TL	5	H	30.00-51
	51-24.00/5.0	TL	5	H	33.00-51
	51-26.00/5.0	TL	5	H	36.00-51
	51-40.00/4.5	TL	5	H	50.00-51
57	57-27.00/6.0	TL	5	H	37.00-57
	57-29.00/6.0	TL	5	H	40.00-57
	57-32.00/5.0	TL	5	H	44.00-57
	57-34.00/6.0	TL	5	H	50.00-57
	57-36.00/6.0	TL	5	H	50.00-57
	57-44.00/6.0	TL	5	H	55.50-57
	57-47.00/5.0	TL	5	H	60.00-57
	57-47.00/6.0	TL	5	H	60.00-57
	63-36.00/5.0	TL	5	H	53.00-63
63	63-41.00/5.0	TL	5	H	55.00-63
	63-44.00/5.0	TL	5	H	58.00-63



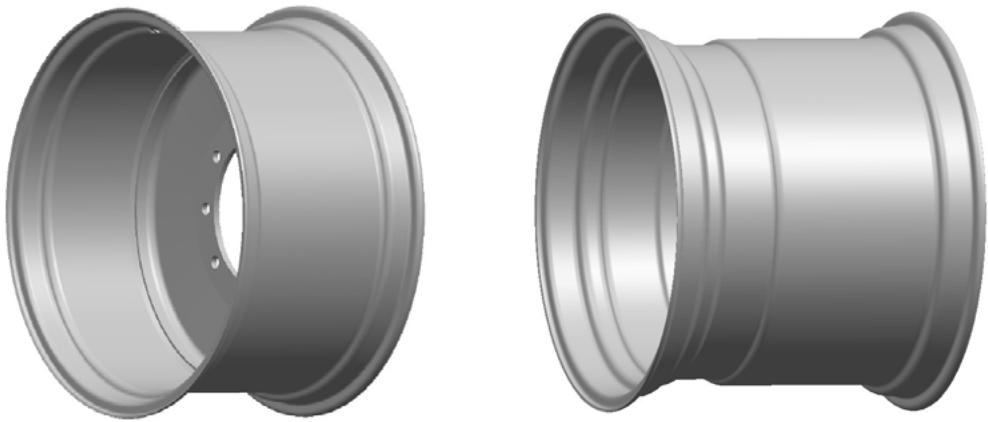

农业车轮

车轮农业车轮包括 W、DW、DC 和 FB 型系列。这些车轮适用于各种拖拉机、联合收割机、喷淋和灌溉机械、农具浮选车、糖乙醇 / 甘蔗拖车、矿浆运输车、打包机等。所有农业车轮均采用粉末涂料进行全面喷涂，以确保车轮在潮湿 / 腐蚀环境下的耐久性。



规格	型号	TT (有内胎) or TL (无内胎)	件数	类型 (N - 普通型, H - 重型, L - 轻型, O - 其他, D - 开发)	配用轮胎
12	12x3.00D	TL	1	N	4.00-12
	12x4.50E	TL	1	N	6.00-12
	12x7	TL	1	N	9.00-12
	12x10.50I	TL	1	N	23x12.50-12
14	14x4 1/2J	TL	1	N	6.00-14
15	15x4.00E	TL	1	N	5.00-15
	15x6	TL	1	N	7.50-15
	15x7	TL	1	N	8.50-15
	15x8LB	TL	1	N	11L-15
	15x10LB	TL	1	N	12.5L-15
	15x13LB	TL	1	N	15.5-15
15.3	15.3x9.00	TL	1	N	10.0-15.3 or 11.5-15.3
15.5	15.5xAG13.00	TL	1	N	400/60-15.5
16	16x3.00D	TL	1	N	4.00-16
	16x4.00E	TL	1	N	5.50-16
	16x4.50E	TL	1	N	6.00-16
	16x5.0F	TL	1	N	6.50-16
	16x5.5F	TL	1	N	7.50-16
	16x5.5K	TL	1	N	7.50-16
	16x6.0K	TL	1	N	7.50-16
	16xW8	TL	1	N	9.5-16
	16x10LB	TL	1	N	12-16
16.5	16.5x8.25	TL	1	N	10-16.5
	16.5x9.75	TL	1	N	12-16.5
	16.5x12.00	TL	1	N	15.5-16.5
16.1	16.1xW11C	TL	1	N	13.6-16.1
	16.1xW14C	TL	1	N	16.9-16.1
	16.1xW16C	TL	1	N	18.4-16.1
	16.1xW18C	TL	1	N	20.8-16.1
17	17x13.00	TL	1	N	15.0/55-17
17.5	17x16.00	TL	1	N	19.0/45-17
17.5	17.5x6.75	TL	1	N	8.5R17.5
	18x9	TL	1	N	10.5-18
	18x11	TL	1	N	13-18
18	18x13	TL	1	N	15-18
	19.5x6.75	TL	1	N	245/70R19.5
	19.5x7.50	TL	1	N	265/70R19.5
	19.5x8.25	TL	1	N	285/70R19.5
19.5	19.5x14.00	TL	1	N	445/45R19.5

20	20x5.5F	TL	1	N	7.50-20
	20xW7	TL	1	N	8.30-20
	20xW8	TL	1	N	9.50-20
	20xW13	TL	1	N	14.9-20
	20x13.00	TL	1	N	15.5-20
	20x14L	TL	1	D	14.9-20
22.5	22.5x7.50	TL	1	N	255/70R22.5 265/60R22.5
	22.5x8.25	TL	1	N	265/70R22.5 275 or 285/60R22.5
	22.5x9.00	TL	1	N	285/70R22.5 295 or 315/60R22.5
	22.5x11.75	TL	1	N	355 or 375 or 385/80R22.5
	22.5x12.25	TL	1	N	405/70R22.5
	22.5x13.00	TL	1	N	425/65R22.5
	22.5x14.00	TL	1	N	425 or 435 or 445 or 455/65R22.5
	22.5x16.00	TL	1	N	500/60-22.5 550/60-22.5
	22.5xAG20.00	TL	1	N	600/50-22.5
	22.5xAG24.00	TL	1	N	700/40-22.5
24	24xW7	TL	1	N	8.30-24
	24xW8	TL	1	N	9.50-24
	24xW10	TL	1	N	11.2-24
	24xW12	TL	1	N	13.6-24
	24xW13	TL	1	N	14.9-24
	24xDW14	TL	1	N	15-24
	24xW15L	TL	1	N	16.9-24
	24xDW17	TL	1	N	19.5L-24
	24xW18L	TL	1	N	20.4-24
	24xDW20	TL	1	N	23.1-24
25	25-36/1.5	TL	1	O	66x44.00-25
26	26xW11	TL	1	N	12.4-26
	26xW12	TL	1	N	13.6-26
	26xW13	TL	1	N	14.9-26
	26xDW16A	TL	1	N	18.4-26
	26xDW20A	TL	1	N	23.1-26
	26xDW25A	TL	1	N	28L-26
26.5	26.5xAG16.00	TL	1	D	500/55-26.5
	26.5xAG20.00	TL	1	N	600/55-26.5
	26.5xAG24.00	TL	1	N	700/50-26.5
	26.5xAG28.00	TL	1	D	800/45-26.5
28	28xW10	TL	1	N	11.2-28
	28xW11	TL	1	N	12.4-28
	28xW12	TL	1	N	13.6-28
	28xW13	TL	1	N	14.9-28
	28xW14L	TL	1	N	15.5-28
30	28xW15L	TL	1	N	16.9-28
	30xW12	TL	1	N	13.6-30
	30xW14	TL	1	N	15.5-30
	30xW15L	TL	1	N	16.9-30
	30xW16L	TL	1	N	18.4-30
30.5	30xDW16	TL	1	N	18.4-30
	30.5xAG20.00	TL	1	N	650/65-30.5
	30.5xAG24.00	TL	1	N	750/60-30.5
	30.5xAG28.00	TL	1	N	850/50-30.5
32	32xW8	TL	1	N	9.5-32
	32xW10	TL	1	N	11.2-32
	32xW11	TL	1	N	12.4-32
	32xDW20	TL	1	N	23.1-32
	32xDW21A	TL	1	N	24.5-32
34	32xDW27A	TL	1	N	30.5-32
	34xW15L	TL	1	N	16.9-34
36	34xDW15	TL	1	N	16.9-34
	36xW11	TL	1	N	12.4-36
38	38xW10	TL	1	N	11.2-38
	38xW11	TL	1	N	12.4-38
	38xW12	TL	1	N	13.6-38
	38xDW12	TL	1	N	13.6-38
	38xW14	TL	1	N	16.9-38
	38xW15L	TL	1	N	16.9-38
	38xW16L	TL	1	N	18.4-38
	38xW18L	TL	1	N	20.8-38
42	42xW15L	TL	1	N	16.9-42
	42xW16L	TL	1	N	18.4-42
	42xDW16	TL	1	N	18.4-42
	42xW18L	TL	1	N	20.8-42
46	42xDW20	TL	1	N	23.1-42
	46xDW12	TL	1	D	13.6-46
48	48xW7	TL	1	N	8.3-48
	48xW8	TL	1	N	9.5-48
	48xW10	TL	1	N	11.2-48
54	48xW13	TL	1	N	14.9-48
	54xW10	TL	1	N	12.4-54
	54xW11	TL	1	N	12.4-54



商用车轮

车轮所有系列商用车轮均具有机械耐用性，以此来为客户节省成本。所有商用车轮均采用高强度低合金 (HSLA) 钢、数控成型机和电泳油漆涂装，以确保卡车和拖车车轮的强度、精确参数和重量。所有商用车轮都在 EUWA 和 SAE 下进行测试。

规格	型号	TT (有内胎) or TL (无内胎)	件数	类型 (N - 普通型, H - 重型, L - 轻型, O - 其他, D - 开发)	配用轮胎
17.5	17.5x6.00	TL	1	N	205/75R17.5
	17.5x6.75	TL	1	N	225/75R17.5
19.5	19.5x6.75	TL	1	N	245/70R19.5
	19.5x7.50	TL	1	N	265/70R19.5
	19.5x8.25	TL	1	N	285/70R19.5
	19.5x11.75	TL	1	N	365/40R19.5
	19.5x13.00	TL	1	N	445/65R19.5
	19.5x14.00	TL	1	N	445/45R19.5
20	7.00T-20	TT	2	N	9.00R20
	7.5FL-20	TT	2	N	9.00R20 10.00R20
	7.00V-20	TT	2	N	9.00R20 10.00R20
	7.5-20	TT	2	N	9.00R20 10.00R20
	8.00V-20	TT	2	N	11.00R20
	8.50V-20	TT	2	N	12.00R20
	9.00-20	TT	2	N	13.00R20
22.5	22.5x7.50	TL	1	N	10R22.5 11R22.5
	22.5x8.25	TL	1	N	11R22.5 12R22.5
	22.5x9.00	TL	1	N	12R22.5 13R22.5
	22.5x11.75	TL	1	N	355 or 375 or 385/80R22.5
	22.5x12.25	TL	1	N	405/70R22.5
	22.5x13.00	TL	1	N	425/65R22.5
	22.5x14.00	TL	1	N	425 or 435 or 445 or 455/65R22.5
24.5	24.5x8.25	TL	1	N	11R24.5

槽型隔圈	15x14
	20x3 3/8
	20x3 5/8
	20x4
	20x4 1/4
	20x4 1/2
	22x3 3/8
	22x3 5/8
	22x4
	22x4 1/4
	22x4 1/2
	15x4
	20x4
	20x4 1/4
	20x4 1/2
波浪型隔圈	22x4
	22x4 1/4
	22x4 1/2
	15x4
	15x4 1/4
	15x4 1/2
	20x4
	20x4 1/4
	20x4 1/2
	22x4
	22x4 1/4
	22x4 1/2