
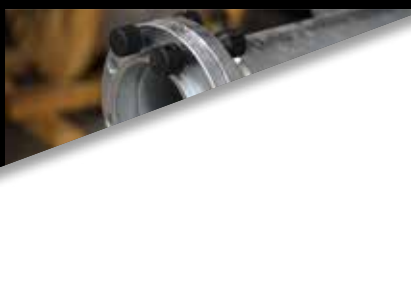




SUMNER*

 A Southwire Company

2019 PRODUCT CATALOG



SUMNER.COM

**Trademark of Sumner Manufacturing Co., LLC. Registered in the U.S.*

OUR STORY

Sumner, a Southwire Company, is a recognized leading manufacturer of material lifts, jack stands, welding tools, material carts and other tools and equipment for the construction market. We are a key supplier to the welding and mechanical contracting industries and have a market presence in more than 50 countries around the world. We maintain manufacturing and sales operations in Texas, Canada, China, the United Kingdom and the Netherlands.

Founded in 1965, our operations began to meet the need for good welding tools and lifting equipment to make pipe installations easier and safe. Early success in the business led the way for us to continually meet the needs of a wide variety of contractors, and we continue to provide a range of equipment options that promote safety and efficiency on the jobsite.

SUMNER MANUFACTURING

At Sumner Manufacturing, our welding customers are very important to us. One of our primary goals as a manufacturer is to provide our customers with high quality, competitively priced tools. Welders are not only our customers, we learn from welders in the field what products are needed to make their jobs easier. These ideas help us to design and build new and better products. In essence, our customers are part of our Research & Development department, and without their input, we would be unable to continually offer great new products.

Another important part of our philosophy at Sumner is our commitment to safety. All Sumner employees are dedicated to the safety of the individuals who use our products. We understand that price is always a concern to our users, but we will never sacrifice quality or safety just to save costs. We know the demands expected of all Sumner products, and each is built for years of use. It could be said that Sumner tools are built the way the welder would make them. As a result, our tools are not only considered the best in the market, but also the most reliable to get the job done efficiently and safely.

TABLE OF CONTENTS

WELDING

| | |
|-------------------|----|
| PFAST™ | 5 |
| Center Punch | 6 |
| Clamps | 7 |
| Pins | 11 |
| Flange Leveler | 12 |
| Flange Spreaders | 13 |
| Adjust-A-Fit™ | 14 |
| Expansion Plugs | 15 |
| Weld Gas Analyser | 16 |
| Ring Purge | 17 |
| Welding Gage | 18 |
| Fit Kits | 19 |
| Squares | 20 |
| Magnetic Fixtures | 21 |
| Levels | 22 |
| Stool | 23 |

JACKS

| | |
|------------------|----|
| Heavy Duty Jacks | 25 |
| Pro Jack* | 26 |
| Fold-A-Jack* | 27 |
| FAT Jack™ | 28 |
| Hi Boy™ | 29 |
| FAB SAF™ Jack | 30 |
| Adjust-A-Rolls™ | 31 |
| Mini-Roll | 32 |
| Pro Roll™ | 33 |
| Big V™ | 34 |
| Max Jax* | 35 |
| Max Jax* 2 | 36 |
| Beam Jax™ | 37 |
| Reel Mac™ Jacks | 38 |
| Hold-Down Device | 39 |

CARTS & STORAGE

| | |
|----------------|----|
| Cricket™ | 44 |
| Grasshopper™ | 45 |
| Handi-Bench | 46 |
| Pipe Mac™ | 47 |
| Hanger Mac™ | 48 |
| Bundle Mac™ | 49 |
| Mac Rack™ | 50 |
| Mac Rack II™ | 51 |
| Cylinder Carts | 52 |

SPECIALTY LIFTS

| | |
|---------------|----|
| Stacker Lift | 57 |
| Roust-A-Bout™ | 58 |
| Fab-Mate™ | 59 |
| Short Stack™ | 59 |

MATERIAL LIFTS

| | |
|---------------------------|----|
| Series 1900 | 61 |
| Series 2000 | 62 |
| Series 2100 | 63 |
| Series 2200 Lil' Hoister™ | 64 |
| Series 2300 | 65 |
| Series 2400 | 66 |
| Series 2500 | 67 |
| Series 2600 | 68 |

GANTRIES

| | |
|-----------------|----|
| Gantries Series | 73 |
|-----------------|----|

THEATRICAL LIFTS

| | |
|-----------------|----|
| Eventer™ Series | 77 |
|-----------------|----|

CORDS

| | |
|--------------------------------|----|
| Royal® Outdoor Extension Cords | 79 |
|--------------------------------|----|

MATERIAL HANDLING

| | |
|--------------------|----|
| Pallet Jacks | 81 |
| Wire Dollies | 82 |
| Storage Containers | 86 |
| Storage Boxes | 89 |

WELDING

PFAST™

Universal Center Punch

Center Punch

Ultra™ Clamp

Ultra™ Qwik Clamp

Ultra™ Fit

Ultra™ Qwik Fit

Clamp Champ™

DX Clamp

Qwik Pins*

Flange Pins

Flange Leveler

Flange Spreaders

Adjust-A-Fit™

Adjust-A-Flange™

Internal Fit-Up Clamp

Expansion Plugs

Purge Star*

Ring Purge

Welding Gauge

Weld Gas Analyzer

Fit Kit™ Tools

Rotary Ground Clamp

Mul-T-Square*

Standard Square

Magnetic Holder

Multiple Purpose Magnetic Fixtures

Magnetic Torch Guide Kit

Levels

Welder's Stool



PFAST™

Built for years of use, the Sumner PFAST™ system will quickly help fabricators be the production leader in their industry.

Special Features:

- Optional in-house set up and training is available to ensure that your team is comfortable operating and maintaining your PFAST™ system fit-up
- Each unit comes complete with all accessories to perform most fit-up applications and a mounted electronic tablet that provides a step-by-step pictorial instruction on how each assembly is set up
- Accurately fit-ups 1" to 8" flanges, fittings, reducers, caps and pup joints
- Capable of 300 lbs. pressure-rated flanges
- Handles 600 lbs. loads
- Fit and tack 75 to 90 joints during an 8 hour shift



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------|---------|--|
| PFAST | 785450 | PFAST™ Assembly |
| PFASTTRAINING | 785451 | Onsite Training & Installation |
| PFASTVTAB | 785615 | Vee Table Assembly Stainless Steel |
| PFASTBTAB | 785620 | Bed Table Stainless Steel |
| PFASTSTAB | 785610 | Side Table Assembly Stainless Steel |
| PFASTCTAB | 785625 | Chuck Table Assembly Stainless Steel |
| PFASTMPIN | 785456 | Chuck Mounting Pin & Nut Kit Stainless Steel |
| PFASTWEDGE | 785630 | Wedge Support Assembly Stainless Steel |
| PFASTCHUCK | 785550 | Chuck Adapter Assembly Stainless Steel |
| PFASTCASTERKIT | 785640 | PFAST™ Caster Kit |
| 785556 | 785556 | Chuck Adapter Plate/Arm |

UNIVERSAL CENTER PUNCH



The Universal Center Punch has the same features found on Sumner's Center Punch, but with unlimited capacity. Magnetic arms attach to the steel surface to assure accurate location when using the punch's spring-loaded striking hammer.

Special Features:

- Adjustable arms accommodate 4" to any size steel pipe or tank
- Magnetic base
- Push button spring-loaded striking hammer
- Removable digital gauge with magnetic base
- Alignment marks for centering
- Digital gauge can be used as angle finder

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-----------|---------|------------------------|
| UCPunch | 784590 | Universal Center Punch |
| CPINCLINE | 779546 | Inclinometer |

CENTER PUNCH



Center head with magnetic aluminum base can be used on the circumference of pipe. Built-in, spring-loaded, hardened striking pin marks location with the push of a button.

Special Features:

- Easy to read digital gauge
- Spring-loaded striking pin
- Magnetic base
- Removable gauge with magnetic base
- Alignment indicator
- 4" to 8" capability only
- Detachable digital gauge doubles as an angle finder

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-----------|---------|--|
| CPunch | 784520 | Center Punch with Digital Angle Finder |
| CPINCLINE | 779546 | Inclinometer |

ULTRA™ CLAMP



The ULTRA™ Clamp device is a fast, accurate fit-up clamp. The main body of this versatile alignment tool is double-walled steel plate and guaranteed over the life of the product.

Special Features:

- Accurate fit-up of 1" through 12" (25 to 300 mm) pipe
- Rugged frame, built for jobsite use
- Smooth roller clamping action for positive gripping
- Stainless steel contacts and alignment screws
- Operating handle repositions for close work
- Fine adjustment screws for quick fit-up
- Lightweight for overhead work
- Available in three sizes

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------------------|
| UC1-2.5 | 781130 | 1 - 2-1/2" Ultra™ Clamp (25-65 mm) |
| UC2-6 | 781150 | 2 - 6" Ultra™ Clamp (50-150 mm) |
| UC5-12 | 781170 | 5 - 12" Ultra™ Clamp (127-300 mm) |

ULTRA™ QWIK CLAMP



The Ultra™ Qwik Clamp body is guaranteed over the life of the tool. Should the frame break or bend during normal fit-up operation, Sumner, at its option, will either repair or replace the part or the tool at no charge.

Special Features:

- Push button design allows for rapid action setting and fine tune thread adjustment
- Rugged frame, built for jobsite use
- Smooth roller clamping action for positive gripping
- Stainless steel contacts and alignment screws
- Operating handle repositions for close work
- Fine adjustment screws for quick fit-up
- Lightweight for overhead work
- Available in three sizes

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------|---------|------------------------------------|
| UQC1-2.5 | 781510 | 1 - 2-1/2" Ultra™ Clamp (25-65 mm) |
| UQC2-6 | 781520 | 2 - 6" Ultra™ Clamp (50-150 mm) |
| UQC5-12 | 781530 | 5 - 12" Ultra™ Clamp (127-300 mm) |

ULTRA™ FIT



A fast, accurate fit-up clamp from fitting to fitting.

Special Features:

- Rugged, compact design to operate in tight locations
- Stainless steel contacts and alignment screws
- Two-hand operating handle for positive gripping
- Fine adjustment screws for quick fit-up
- Lightweight for overhead work
- Smooth roller clamping action for positive gripping
- Available in three sizes

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------------------|
| UF1-2.5 | 781265 | 1 - 2-1/2" Ultra™ Clamp (25-65 mm) |
| UF2-6 | 781275 | 2 - 6" Ultra™ Clamp (50-150 mm) |
| UF5-12 | 781285 | 5 - 12" Ultra™ Clamp (127-300 mm) |

ULTRA™ QWIK FIT



A fast, accurate fit-up clamp from fitting to fitting.


Special Features:

- Push button design allows for rapid action setting and fine tune threaded adjustment
- Rugged, compact design to operate in tight locations
- Stainless steel contacts and alignment screws
- Two-hand operating handle for positive gripping
- Fine adjustment screws for quick fit-up
- Lightweight for overhead work
- Smooth roller clamping action for positive gripping
- Available in three sizes

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------|---------|------------------------------------|
| UQF1-2.5 | 781540 | 1 - 2-1/2" Ultra™ Clamp (25-65 mm) |
| UQF2-6 | 781550 | 2 - 6" Ultra™ Clamp (50-150 mm) |
| UQF5-12 | 781560 | 5 - 12" Ultra™ Clamp (127-300 mm) |

CLAMP CHAMP™

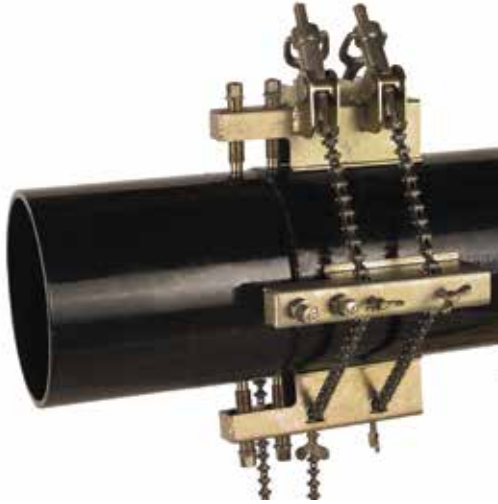

The Clamp Champ™ tool is built for the welder who takes pride in doing the job right the first time. The Clamp Champ™ tool is similar to a pipe vise with fast, easy set up and solid chain engagement.

Special Features:

- Knurled adjustment for gloved hands and precise leveling
- Leveling and supporting device quickly and accurately sets gap
- Drop forged handle and wing nuts designed for rough field use and easy adjustment with gloved hands
- Fast action chain lock system for fast set-up
- Flared jack bars are easy to add or remove to accommodate a wide range of pipe diameters
- Jack bar screw allows welder to square and space the fit-up easily
- All parts plated to resist rust
- High tensile strength chain with black oxide finish

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------|---------|---|
| CCKIT1-10 | 781000 | Standard Clamp Champ™ |
| CCKITSS1-10 | 780999 | Stainless Steel Clamp Champ™ Kit (1-10") |
| CCKIT1-16 | 780998 | Standard Clamp Champ™ Kit (1-16") |
| CCKITSS1-16 | 780997 | Stainless Steel Clamp Champ™ Kit (1-16") |
| CCKIT10-36 | 781250 | Standard Clamp Champ™ Kit (1-16") |
| CCKITSS10-36 | 781251 | Stainless Steel Clamp Champ™ II (10-36") |
| CCCKSTD16 | 781031 | Standard Clamp Champ™ Conversion Kits |
| CCCKSS16 | 781032 | Stainless Steel Conversion Kit to 16" (Standard) |
| CCCKSTD36-48 | 781252 | Stainless Steel Standard Conversion Kit to 16" (SS) |
| CCCKSS36-48 | 781253 | Stainless Steel Conversion Kit II for 36-48" (Standard) |

DX CLAMP



The DX Clamp is a drop forged pipe clamp that is tough enough to handle any use or abuse.

Special Features:

- Tough enough to handle any use or abuse
- Five models cover 1-14" / 25-35 mm pipe range
- Adjustment screws offer hardened steel ball contact with pipe
- Stainless accessories available

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------------|
| DX1-3 | 781570 | DX 1-3" Clamp (25-76 mm) |
| DX2-5 | 781571 | DX 2-5" Clamp (50-127 mm) |
| DX4-7 | 781572 | DX 4-7" Clamp (101-177 mm) |
| DX5-9 | 781573 | DX 5-9" Clamp (127-228 mm) |
| DX10-14 | 781574 | DX 10-14" Clamp (254-355 mm) |

INTERNAL FIT-UP CLAMP



The Internal Fit-Up Clamp is an internal pipe alignment tool.

Special Features:

- Can be used on all standard weld neck flanges and slip-on flanges
- Stainless steel contact points – a standard feature
- One piece construction – no loose pieces
- Quick action operation
- Two independently operated internal clamps align flange to pipe, even if internal dimensions differ
- **NOTE:** The Internal Fit-Up Clamp is an alignment tool. A separate lifting device to support the flange weight is recommended.

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---|
| 784100 | 784100 | Internal Fit-Up Clamp, 2-4" (50-101 mm) |
| 784102 | 784102 | Internal Fit-Up Clamp, 4-8" (101-203 mm) |
| 784103 | 784103 | Internal Fit-Up Clamp, 8-12" (203-304 mm) |

QWIK PINS*



For fast, accurate alignment of carbon pipe flanges.

Special Features:

- Quick installing pins work to level flange (two-hole) for tack and weld-out
- Hardened tapered Qwik Pin fasteners automatically center on 5/8" to 1-5/8" (16–42 mm) holes
- Features Acme threads for maximum clamping power and hardened steel for long-lasting use
- Features push button release

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------------|
| QWIKP | 781235 | Qwik Pins (set of 2) |

FLANGE PINS



For fast, accurate alignment of carbon pipe flanges (carbon or stainless steel).

Special Features:

- Quick installing pins work as convenient reference points to level flange for tack and weld-out — no tools needed
- Hardened tapered ST-106 and ST-206 pins automatically center on 5/8" to 1-5/8" (16 to 42 mm) holes, ST-258 pins similarly set in 1-1/2" to 2-5/8" (38 to 66 mm) holes or flange thickness 4 5/8" - 6 3/8" (117 - 162 mm)
- Features Acme threads for maximum clamping power and hardened steel for long lasting use

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---|
| ST-106 | 780430 | 5/8" - 1-5/8" Flange Pins (set of 2) (16-42 mm) |
| ST-206 | 780429 | 5/8" - 1-5/8" Stainless Steel Flange Pins (set of 2) (16-42 mm) |
| ST-258 | 780650 | 1-1/2" - 2-5/8" Flange Pins (set of 2) (38-66 mm) |

FLANGE LEVELER



Two-hole and level in one time-saving operation.

Special Features:

- For accurate alignment of carbon or stainless steel pipe flanges
- Two-hole and level in one time-saving operation
- Uses push-button Qwik Pin nuts for fast action
- Features stub Acme threads for maximum clamping and hardened steel for lasting use
- Automatically centers in flange holes 5/8" to 1-5/8" (16 to 42 mm)

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------|---------|---------------------------|
| FLANGLVLR | 781240 | Flange Leveler |
| FLANGLEVRKIT | 779934 | Flange Leveler - Vial Kit |

FLANGE SPREADER



ST-304 Flange Spreader (Manual)

Manual Flange Spreader Features:

- 4 models to cover flange range from 1" (25 mm) to 24" (600 mm)
- Can be used for 150 lbs. to 1,500 lbs. flanges
- Hardened wedge for safe splitting
- Large feed screw
- Drive can be rotated by 1-3/8" wrench or 1/2" (12 mm) bar
- Compact design – strong enough for tough jobs

Hydraulic Flange Spreader Features:

- 10 ton flange splitter to tackle the tough jobs
- Spreader arms adjust from 2-3/4" to 8-1/2" (70 mm to 215 mm)
- Spring return, single action cylinder
- Hardened wedge
- Simple operation
- Hand pump and 6' (1.5 m) hose available as accessories

Flange Spreader Accessories:

- Hand hydraulic pump for Flange Spreader with 6' (1.5 m) hose and quick disconnect



ST-310 Flange Spreader (Hydraulic)

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------|---------|---------------------------|
| ST-304 | 784000 | 6-3/8" Flange Spreader |
| ST-303 | 784001 | 5" Flange Spreader |
| ST-302 | 784002 | 4" Flange Spreader |
| ST-301 | 784003 | 3" Flange Spreader |
| ST-310 | 784004 | Hydraulic Flange Spreader |
| HHYDPUMP | 777010 | Hand Hydraulic Pump |

| PART NO. | DESCRIPTION | SPREAD | PIN DIAMETER | 150 LB | 300 LB | 400 LB | 600 LB | 900 LB | 1,500 LB |
|----------|------------------------|-----------------|--------------|--------|-----------|-----------|-----------|--------|----------|
| 784003 | ST-301 Flange Spreader | 3" (76 mm) | 5/8" (16 mm) | 1-6" | 3/4-4" | 1/2-2" | — | — | — |
| 784002 | ST-302 Flange Spreader | 4" (101 mm) | 3/4" (19 mm) | 2-12" | 1-1/2-8" | 1-4" | 1-4" | 1-2" | 1-2" |
| 784001 | ST-303 Flange Spreader | 5" (127 mm) | 7/8" (22 mm) | 5-24" | 2-1/2-12" | 1-1/2-8" | 1-1/2-8" | 1-4" | 1-3" |
| 784000 | ST-304 Flange Spreader | 6-3/8" (162 mm) | 1" (25 mm) | 10-24" | 7-24" | 3-1/2-16" | 3-1/2-16" | 4-10" | 1-5" |

| PART NO. | DESCRIPTION | CAPACITY | CYLINDER CAPACITY | CYLINDER STROKE | FLANGE PIN SIZE | 150 LB | 300 LB | 400 LB | 600 LB | 900 LB | 1,500 LB |
|----------|------------------------|-----------|-------------------|-----------------|---------------------------|----------|----------|----------|----------|---------|----------|
| 784004 | ST-310 Flange Spreader | 9 x 92 mm | 10 ton | 2" (54 mm) | 1-1/4 - 1-5/8" (32-42 mm) | 22 - 42" | 16 - 28" | 14 - 24" | 12 - 20" | 8 - 16" | 4 - 8" |

ADJUST-A-FIT™



The Adjust-A-Fit™ makes lining up fittings a trouble-free, one man operation.

Special Features:

- Uses gravity to align fittings for loads up to 45°
- Fastens directly onto fittings for loads up to 1,000 lbs.
- Threaded shaft assembly is hardened for long tool life
- Cloverleaf setscrew and threaded shaft handle work from either side

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------------|
| ST-104 | 780420 | ST-104 Adjust-A-Fit™ |

ADJUST-A-FLANGE™



The Adjust-A-Flange™ eliminates 75% of the hard work in pipe fitting when used with the Adjust-A-Fit™ and Roust-A-Bout™.

Special Features:

- Fits all flanges for 5" pipe and larger with bolt holes 3/4" to 1-5/8" (19 to 42 mm)
- Used in combination with the Adjust-A-Fit™ to bring pipe flanges to exact plumb for tack and weld-out
- Handles loads up to 1,000 lbs.
- Flange nuts serve as convenient reference points to check level

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------------|
| ST-105 | 780425 | ST-105 Adjust-A-Flange™ |

EXPANSION PLUGS



Inexpensive, low cost Nylon Expansion Plugs are ideal for pipework, leak testing of drains, pools, spas and purging.

Special Features:

- Come in 3/4" – 4" (12 – 115mm) sizes
- Rubber rings are resistant to many chemicals and sea water corrosion
- Hollow shaft with screw cap for sealing or venting
- Available individually or as a kit

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------|---------|-------------------------------------|
| NEP3/4-4KIT | 786055 | 3/4 - 4" Expansion Plug Kit |
| NEP3/4-4KIT | 786060 | 3/4" (17mm) Nylon Expansion Plugs |
| NEP1 | 786061 | 1" (25mm) Nylon Expansion Plugs |
| NEP1-1/4 | 786062 | 1-1/4" (31mm) Nylon Expansion Plugs |
| NEP1-1/2 | 786063 | 1-1/2" (37mm) Nylon Expansion Plugs |
| NEP2 | 786064 | 2" (50mm) Nylon Expansion Plugs |
| NEP2-1/2 | 786065 | 2 1/2" (60mm) Nylon Expansion Plugs |
| NEP3/4-4KIT | 786066 | 3" (75mm) Nylon Expansion Plugs |
| NEP3-1/2 | 786067 | 3 1/2" (85mm) Nylon Expansion Plugs |
| NEP4 | 786068 | 4" (100mm) Nylon Expansion Plugs |
| NEP4 | 786070 | 6" (150mm) Aluminum Expansion Plugs |
| HBARB10X1/4 | 779395 | 1/2" BSP x 3/8" Hose Barb |
| HBARB1/2X3/8 | 779396 | 10mm x 1/4" Hose Barb |

PURGE DAMS

WELD GAS ANALYZER



Argo-naught oxygen analyzer for welding.

Special Features:

- Hermetically sealed, robust housing
- Air and water-tight
- State of the art electronics
- High measurement accuracy
- Quick response time
- Clear, large display
- Increased sensor life expectancy

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---------------------------------------|
| WGA | 779281 | Argo-Naught Weld Gas Analyzer |
| OXYSENS | 779330 | Argo-Naught Replacement Oxygen Sensor |

PURGE STAR*



Inflatable purge star system.

Special Features:

- Purge 6" pipe in less than 3 minutes to less than 1% oxygen content
- Reduce argon usage
- Increase weld production rate
- Improve weld quality
- Made for years of use

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------------------------------|---------|-------------------------------------|
| PURGE STAR - SINGLE INFLATION | | |
| SHPS2 | 788001 | 2" (50 mm) Single Hose Purge Star |
| SHPS3 | 788003 | 3" (75 mm) Single Hose Purge Star |
| SHPS4 | 788004 | 4" (100 mm) Single Hose Purge Star |
| SHPS6 | 788006 | 6" (150 mm) Single Hose Purge Star |
| SHPS8 | 788007 | 8" (200 mm) Single Hose Purge Star |
| SHPS10 | 788008 | 10" (250 mm) Single Hose Purge Star |
| PURGE STAR - DOUBLE INFLATION | | |
| DHPS12 | 788009 | 12" (300 mm) Double Hose Purge Star |
| DHPS14 | 788010 | 14" (350 mm) Double Hose Purge Star |
| DHPS16 | 788011 | 16" (400 mm) Double Hose Purge Star |

RING PURGE



Save time and argon with Sumner's ring purge systems.

Special Features:

- Double hose inflation: Red for dam inflation; Black to fill the weld chamber
- Exclusive dam dump valve deflates dam quickly after weld is completed
- High temperature resistant Proban® and fire resistant fabrics
- Purge 36" pipe to less than 1% oxygen content in 10 minutes
- Dramatic savings in argon
- High quality weld results
- Designed for years of use

SPECIFICATIONS

Proban® is a registered trademark of Rhoda Consumer specialities LTD

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------------|
| RP18 | 786009 | 18" (450 mm) Ring Purge |
| RP20 | 786010 | 20" (500 mm) Ring Purge |
| RP22 | 786011 | 22" (550 mm) Ring Purge |
| RP24 | 786012 | 24" (600 mm) Ring Purge |
| ROP26 | 786013 | 26" (650 mm) Ring Purge |
| RP28 | 786014 | 28" (700 mm) Ring Purge |
| RP30 | 786015 | 30" (750 mm) Ring Purge |
| RP32 | 786016 | 32" (800 mm) Ring Purge |

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--------------------------|
| RP34 | 786017 | 34" (850 mm) Ring Purge |
| RP36 | 786018 | 36" (900 mm) Ring Purge |
| RP42 | 786021 | 42" (1050 mm) Ring Purge |
| RP48 | 786024 | 48" (1200 mm) Ring Purge |
| RP56 | 786028 | 56" (1422 mm) Ring Purge |
| RP60 | 786030 | 60" (1524 mm) Ring Purge |
| RP72 | 786036 | 72" (1828 mm) Ring Purge |
| RP80 | 786040 | 80" (2032 mm) Ring Purge |

WELDING GAGE



The welding gage measures internal hi-lo misalignment and root gap spacing.

Special Features:

- Accurate quick check of internal hi-lo
- Root weld spacing with little effort
- Available in both imperial and metric

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------|
| WGAGEI | 781900 | Welding Gauge Imperial |
| WGAGEM | 781901 | Welding Gauge Metric |

ROTARY GROUND CLAMP



Puts an end to tangled ground leads.

Special Features:

- Rotary head turns with the pipe puts an end to ground lead twist, tangle and wear
- Provides quick, positive ground for roll-out welding of pipe and fittings eliminates weld pinholes caused by poor grounding
- Attaches and detaches in seconds
- Makes up ground leads three ways lug, clamp-on and bare cable
- Positive anti-arc bearings take loads up to 400 amps

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---------------------|
| ST-107 | 780435 | Rotary Ground Clamp |

FIT KITS™ TOOLS

The professional pipe fitter's welding clamp kit.

Fit Kit™ 2 - 6"

- A compact pipe fit-up kit containing Sumner's most commonly used fit-up tools
- **Each Fit Kit 2 - 6" contains:**
 - 2-6" Ultra™ Clamp (Stock # 781150)
 - 2-6" Ultra™ Fit (Stock # 781275)
 - 4-8" Internal Fit-Up Clamp (Stock # 784102)
 - Set of carbon steel Flange Pins (Stock # 780430)
 - Quad Level (Stock # 781946)
 - Weldbox™ 2008 for storage (Stock # 779910)

Fit Kit™ 2 - 12"

- The Summer Fit Kit 2 - 12" provides everything the pipe fitter needs, complete with Weldbox™ 3617 for storage
- **Each Fit Kit™ 2 - 12" contains:**
 - Four (4) Fold-A-Jacks* (Stock # 781300)
 - 2-6" Ultra™ Clamp (Stock # 781150)
 - 5-12" Ultra™ Clamp (Stock # 781170)
 - 2-6" Ultra™ Fit (Stock # 781275)
 - 5-12" Ultra™ Fit (Stock # 781285)
 - 2-4" Internal Fit-Up Clamp (Stock # 784100)
 - 4-8" Internal Fit-Up Clamp (Stock # 784102)
 - 8-12" Internal Fit-Up Clamp (Stock # 784103)
 - Quad Level (Stock # 781946)
 - Steel Square (Stock # 781920)
 - Set of Qwik Pins* (Stock # 781235)
 - Weldbox™ 3617 for storage (Stock # 779928)

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------|
| FK2-6 | 780324 | Fit Kit™, 2 - 6" |
| FK2-12 | 780315 | Fit Kit™, 2 - 12" |



MUL-T-SQUARE*



The Mul-T-Square* tool consists of two 45° blades that slide effortlessly in an industrial-strength plastic handle. Each blade is made of stainless steel for precise alignment. The blades are loosened or secured by a simple twist of the conveniently located locking knob.

Special Features:

- Lightweight, but durable
- Handles up to 8" flanges and up to 14" fittings
- Versatile for measuring 45° and 90° angle
- Blades marked with both imperial and metric units
- 10" (26 cm) and 14" (35 cm) arms
- Arms can be expanded for up to 30" (76 cm)

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-------------|---------|--|
| MTS | 790000 | Mul-T-Square* Complete |
| MTSE | 790030 | Mul-T-Square* w/Extended Blade |
| MTSBLADE | 790021 | Mul-T-Square* Blades only (2) |
| MTSEXTBLADE | 790026 | Mul-T-Square* Extended Blades only (2) |
| 790001 | 790001 | Mul-T-Square* Handle only |

STANDARD SQUARE



Aluminum standard squares from Sumner are marked with both imperial and metric units.

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-----------------|
| ALSQ | 781921 | Aluminum Square |

MAGNETIC HOLDER



Sumner magnetic holders can be used to position a standard builder's square for layout work or to create an ideal burning guide.

Special Features:

- Use Magnetic Holders with a standard square to create an ideal torch guide
- Sold in packages of three
- Holds squares up to 1/8" (3 mm) thick

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------------|
| MAGHOLD | 781895 | Magnetic Holders (3) |

MULTI PURPOSE MAGNETIC FIXTURES



For fast, accurate positioning of flat and round ferrous metal for welding and assembly.

Special Features:

- Small, medium, large and multiple angle fixtures
- Heavy duty and adjustable angle fixtures

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--------------------------------|
| MZWF | 781885 | Multiple Angle Welding Fixture |
| SAWF | 781886 | Small Angle Welding Fixture |
| MAWF | 781887 | Medium Angle Welding Fixture |
| LAWF | 781888 | Large Angle Welding Fixture |

MAGNETIC TORCH GUIDE KIT



Kit includes two Sumner magnetic holders and a 24" (61 cm) stainless steel cutting rail for straight torch work.

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------------|
| MAGTRCH | 781896 | Magnetic Torch Guide |

ACCU-LEVEL



The Accu-Level features (0°, 45°, 90°) vials and is made with rugged die cast aluminum for ultimate durability.

Special Features:

- Comes with belt holster

QUAD LEVEL



The Quad Level features four vials and a magnetic base.

Special Features:

- This anodized aluminum level features (0°, 30°, 45°, 90°) vials. A "v" cut into the base makes it great for pipe and conduit work.

POCKET LEVEL



The Pocket Level is compact to accommodate many fit-up tasks.

Special Features:

- A twin vial level constructed of tough ABS and aluminum frame, the strong magnetic base makes this pocket-size level great for many tasks.

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--------------|
| QLVL | 781946 | Quad Level |
| PLVL | 781947 | Pocket Level |
| ALVL | 781950 | Accu-Level |

WELDER'S STOOL



Welder's stool for fabrication shops.

Special Features:

- Stamped steel seat with air holes
- Cozy seat conforms to body even during 8 hour shifts
- All steel construction
- Uses Sumner lock washer for quick height adjustment
- Seat contained to stool – will not come out accidentally
- 300 lbs. capacity
- Max. height: 22" / 55.9 cm
- Min. height: 15" / 38.1 cm

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------|
| WS1 | 785800 | Welder's Stool |

JACKS

- Adjust-A-Rolls™
- Beam Jax™
- Big V™
- Econo Mac 75
- Fab™ Saf Jack
- Fat Jack™
- Fold-A-Jack*
- Heavy Duty Jack
- Hi Boy™
- Hold Down Device
- Hold E*
- Max Jax*
- Max Jax* 2
- Mini Roll
- Pipe Jax
- Pro Jack*
- Pro Roll™
- Reel Mac™



HEAVY DUTY JACKS



The Heavy Duty Jack is the first commercially produced jack stand constructed of rugged 1" (2.5 cm) steel tubing, tested by independent labs for excessive loads.

Special Features:

- 2,500 lbs. capacity
- 3,500 lbs. capacity for the Heavy Duty Jack Plus
- Strut tension plate for superior lateral support
- 1" (2.5 cm) square tube base construction
- Built for heavy use and abuse
- Quick-action lock washer for fast height positioning
- Patented Fall Guard feature allows 1" (25 mm) safety zone around lock washer
- 1-1/2" (38 mm) Acme fine adjustment thread
- Large, convenient adjustment handle
- Set screw can lock jack head to stand for transportation – no loose pieces
- Jack independently load tested for quality assurance
- CE rated

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--|---------|---|
| Hi Heavy Duty Jack with Fall Guard™ | | |
| ST-801 | 780375 | Hi Heavy Duty Jack w/Vee Head |
| ST-802 | 780376 | Hi Heavy Duty Jack w/Roller Head |
| ST-803 | 780377 | Hi Heavy Duty Jack w/Bar Stock Head |
| ST-804 | 780378 | Hi Heavy Duty Jack w/Stainless Steel Rollers |
| ST-805 | 780379 | Hi Heavy Duty Jack w/Stainless Steel Vee Head |
| ST-806 | 780380 | Hi Heavy Duty Jack w/Ball Transfer Head |
| ST-807 | 780381 | Hi Heavy Duty Jack w/Rubber Wheels |
| Lo Heavy Duty Jack with Fall Guard™ | | |
| ST-901 | 780385 | Lo Heavy Duty Jack w/Vee Head |
| ST-902 | 780386 | Lo Heavy Duty Jack w/Roller Head |
| ST-903 | 780387 | Lo Heavy Duty Jack w/Bar Stock Head |
| ST-904 | 780388 | Lo Heavy Duty Jack w/Stainless Steel Rollers |
| ST-905 | 780389 | Lo Heavy Duty Jack w/Stainless Steel Vee Head |
| ST-906 | 780390 | Lo Heavy Duty Jack w/Ball Transfer Head |
| ST-907 | 780391 | Lo Heavy Duty Jack w/Rubber Wheels |
| Specialty Jacks | | |
| HIHDPLUS | 780326 | Hi Heavy Duty Jack Plus w/Ribbed Vee |

PRO JACK*



Most economical Sumner* jack stand.

Special Features:

- Formed steel legs
- Now 2,000 lbs. capacity
- Priced for all budgets
- Strut tension plate for superior lateral support
- Quick-action lock washer for fast height positioning
- Patented Fall Guard feature allows 1" (2.5 cm) safety zone around lock washer
- 1-1/2" (38 mm) Acme fine adjustment thread
- Large, convenient adjustment handle
- Set screw for double margin of safety
- Set screw can lock jack head to stand for transportation – no loose pieces
- Jack independently load tested for quality assurance
- CE rated

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---|
| ST-871 | 780471 | Hi Pro-Jack* w/Vee Head |
| ST-872 | 780472 | Hi Pro-Jack* w/Roller Head |
| ST-873 | 780473 | Hi Pro-Jack* w/Bar Stock Head |
| ST-874 | 780474 | Hi Pro-Jack* w/Stainless Steel Rollers |
| ST-875 | 780475 | Hi Pro-Jack* w/Stainless Steel Vee Head |
| ST-876 | 780476 | Hi Pro-Jack* w/Ball Transfer Head |
| ST-877 | 780477 | Hi Pro-Jack* w/Rubber Wheels |

FOLD-A-JACK*



Lighter design, no loose pins and easy disassembly.

Special Features:

- Up to 2,500 lbs. capacity
- Folds up for storage ease
- Carrying handle for ease of transporting
- 1" (2.5 cm) square tube base construction
- Quick-action lock washer for quick height positioning
- Patented Fall Guard feature allows 1" (25 mm) safety zone around lockwasher
- 1-1/2" (38 mm) Acme fine adjustment thread
- Large, convenient adjustment handle
- Set screw for double margin of safety
- Set screw can lock jack head to stand for transportation – no loose pieces
- Jack independently load tested for quality assurance
- CE rated

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------------------------------------|---------|---|
| ST-881 | 781300 | Hi Fold-A-Jack* w/Vee Head |
| ST-882 | 781301 | Hi Fold-A-Jack* w/Roller Head |
| ST-883 | 781302 | Hi Fold-A-Jack* w/Bar Stock Head |
| ST-884 | 781303 | Hi Fold-A-Fack* w/Stainless Steel Rollers |
| ST-885 | 781304 | Hi Fold-A-Jack* w/Stainless Steel Vee Head |
| ST-886 | 781305 | Hi Fold-A-Jack* w/Ball Transfer Head |
| ST-887 | 781306 | Hi Fold-A-Jack* w/Rubber Wheels |
| Lo Fold-A-Jack with Fall Guard | | |
| ST-981 | 781310 | Lo Fold-A-Jack* w/Vee Head |
| ST-982 | 781311 | Lo Fold-A-Jack* w/Roller Head |
| ST-983 | 781313 | Lo Fold-A-Jack* w/Stainless Steel Roller Head |
| ST-984 | 781314 | Lo Fold-A-Jack* w/Stainless Steel Vee Head |
| ST-985 | 781315 | Lo Fold-A-Jack* w/ Ball Transfer Head |
| ST-986 | 781316 | Lo Fold-A-Jack* w/Rubber Wheels |

JACKS

FAT JACK™



The Fat Jack™ is available in Mini, Midi or Maxi sizes.

Special Features:

- 6,000 lbs. capacity
- Midi and Maxi feature a folding base
- 1-1/4" square tube base construction
- Convenient carrying handle
- Large 7" ribbed vee head with locking pin and retainer

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------|---------|--|
| MINIFJVH | 785252 | Mini Fat Jack™ w/ Vee Head |
| MIDIFJVH | 785251 | Midi Fat Jack™ w/ Vee Head |
| MAXIFJVH | 785250 | Maxi Fat Jack™ w/ Vee Head |
| MINIFJRH | 785257 | Mini Fat Jack™ w/ Aluminum Roller Head |
| MIDIFJRH | 785256 | Midi Fat Jack™ w/ Aluminum Roller Head |
| MAXIFJRH | 785255 | Maxi Fat Jack™ w/ Aluminum Roller Head |
| 785220 | 785220 | Roller Head/6,000 lb cap |

HI BOY™

The Hi Boy™ stand is a safe, portable folding stand that is easy to transport at 72" (183 cm). In its lowest position of 39" (99 cm), the Hi Boy™ stand is ideal for normal fabrication and welding of pipe.

Special Features:

- Holds 1,000 lbs. at 72"
- 39-72" (98-180 cm) adjustable height
- 38" (96 cm) wide base
- Designed for pipe installation in tight areas
- Folds for easy transport
- Convenient carrying handle
- Quick action lock washer for fast height positioning
- Patented Fall Guard feature allows 1" (25 mm) safety zone around lock washers
- 1-1/2" (38 mm) Acme fine adjustment thread
- Large, convenient adjustment handle
- Set screw for double margin of safety
- Set screw locks jack head to stand for transportation – no loose pieces



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------------|
| HIBOY | 783250 | Hi Boy™ Jack w/Vee Head |

JACKS

FAB SAF™ JACK



The FAB SAF™ jack is great for serious fabrication.

Special Features:

- 3,500 lbs. capacity vee head
- 2,500 lbs. capacity roller head
- 30" (76 cm) Wide Heavy Duty Base
- Height range 32-52" (81-132 cm)
- Large 12-1/2" (32 cm) ribbed vee head to accommodate 24" (600 mm) pipe
- Quick-action lock washer

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------|---------|------------------------------|
| FABSAFV | 780395 | FAB SAF™ Jack |
| FABSAFRH | 780400 | FAB SAF™ Jack w/ Roller Head |



ADJUST-A-ROLLS™



The Adjust-A-Rolls™ clean and simple design avoids welder interference.

Special Features:

- ½ to 36" (1.2 to 91 cm) or 2,500 lbs. pipe capacity
- Bronze bearing to eliminate arcing
- Handle large enough to work with gloved hand
- Roller adjustment from either side
- Wheels trued for true pipe rotation
- Brake to lock loads for layout or fit-up
- Quick Change design increases roller stand utility

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---|---------|---|
| ST-601 | 780365 | Hi Adjust-A-Roll™ w/Roller Wheels |
| ST-602 | 780366 | Hi Adjust-A-Roll™ w/Ball Transfer Head |
| ST-603 | 780367 | Hi Adjust-A-Roll™ w/Rubber Wheels |
| ST-604 | 780368 | Hi Adjust-A-Roll™ w/Stainless Steel Wheels |
| ST-605 | 780369 | Hi Adjust-A-Roll™ w/Bar Stock Head |
| ST60BASE | 780399 | Hi Adjust-A-Roll™ Hi, Base Only |
| Lo Adjust-A-Rolls™ (Note: Adjust-a-Roll has fixed legs and fixed height) | | |
| ST-701 | 780370 | Lo Adjust-A-Roll™ w/Roller Wheels |
| ST-702 | 780371 | Lo Adjust-A-Roll™ w/Ball Transfer Head |
| ST-703 | 780372 | Lo Adjust-A-Roll™ w/Rubber Wheels |
| ST-704 | 780373 | Lo Adjust-A-Roll™ w/Stainless Steel Wheels |
| ST-705 | 780359 | Lo Adjust-A-Roll™ w/Bar Stock Head |
| ST70BASE | 780405 | Lo Adjust-A-Roll™ Base Only |
| Table Model Rolls | | |
| ST-501 | 780360 | Table Adjust-A-Roll™ w/Roller Wheels |
| ST-502 | 780361 | Table Adjust-A-Roll™ w/Ball Transfer Head |
| ST-503 | 780362 | Table Adjust-A-Roll™ w/Rubber Wheels |
| ST-504 | 780363 | Table Adjust-A-Roll™ w/Stainless Steel Wheels |
| ST-505 | 780364 | Table Adjust-A-Roll™ w/Bar Stock Head |
| ST50BASE | 780500 | Table Adjust-A-Roll™ Base Only |

MINI-ROLL



The Mini-Roll has a fast adjustment for easy pipe positioning.

Special Features:

- Mini-Roll stands 7.25" (18.4 cm) high
- Rollers adjust from either side
- 1/2" to 36" (12 – 900 mm), or 3,500 lbs. pipe capacity
- Small footprint of 11" (28 cm) wide by 22" (56 cm) long
- "Trued" for even pipe rotation
- Bronze bearing to eliminates arcing
- Brake to lock loads for fit-up
- Handle large enough to work with gloved hand

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-----------|---------|---|
| ST-551 | 785280 | Mini-Roll w/ Aluminum Roller Wheels |
| ST-552 | 785281 | Mini-Roll w/ Ball Transfer Head |
| ST-553 | 785282 | Mini-Roll w/ Rubber Wheels |
| ST-554 | 785283 | Mini-Roll w/ Stainless Steel Wheels |
| ST-555 | 785284 | Mini-Roll w/ Bar Stock Head |
| ST-556 | 785288 | Mini-Roll w/ Stainless Steel Ball Transfer Head |
| ST-55BASE | 785285 | Mini-Roll Base Only |

PRO ROLL™



The Pro Roll™ has an adjustable height for the fabricating professional.

Special Features:

- 1/2 – 36" diameter pipe (1.2 – 91 cm) or 2,500 lbs. capacity
- Adjustable height of 29" (74 cm) to 43" (109 cm)
- Leveling on either side of stand
- Uses Quick Change Housings
- Wheels "trued" for even pipe rotation
- Bronze bearings eliminates arcing
- Brake to lock loads for lay-out or fit-up
- Handles large enough to grip with a gloved hand
- Quick Change design increases roller stand utility

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-----------|---------|-------------------------------------|
| ST-401 | 780441 | Pro Roll™ w/ Roller Wheels |
| ST-402 | 780442 | Pro Roll™ w/ Ball Transfer Head |
| ST-403 | 780443 | Pro Roll™ w/ Rubber Wheels |
| ST-404 | 780444 | Pro Roll™ w/ Stainless Steel Wheels |
| ST-405 | 780446 | Pro Roll™ w/ Bar Stock Head |
| ST-40BASE | 780440 | Pro Roll™ Base Only |



BIG V™

The Big V™ is a heavy duty jack stand and is built tough for the demands of larger pipes at an affordable price.

Special Features:

- Supports 2,500 lbs.
- Maximum 36" (900 mm) pipe
- Minimum 4" (100 mm) pipe
- Large 12" (30 cm) vee
- Fast action adjustment handle
- 1-3/4" Acme adjustment screw
- Heavy duty 1" (2.5 cm) square leg tubing
- Wider base
- Several optional large V head styles

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------------|---------|--|
| BIGVB | 780260 | Big V™ (Basic) |
| Big V™ Accessories | | |
| 781381 | 781381 | Large Aluminum Roller Wheels (4) |
| 781382 | 781382 | Stainless Steel Sleeves (4) |
| 781383 | 781383 | Ball Transfers |
| 781394 | 781394 | Rubber Wheel Kit (4) |
| 781397 | 781397 | Stainless Steel Ball Transfers |
| 781406 | 781406 | Roller Head Kit (4 wheels) |
| 781407 | 781407 | Stainless Steel Roller Head Kit (4 wheels) |



MAX JAX*

The versatile MAX JAX* stand is the ideal fabricator stand and stand is great for leveling loads for fit-up, or use with a pipe rotator.



Special Features:

- Steel casters now standard
- Supports 4,500 lbs. each
- 12" (30 cm) vee head
- Handles pipe up to 36" (90 cm)
- Large, convenient adjustment handle
- Optional casters enable pipe to be easily wheeled around in the shop or on the job
- Several optional large vee head styles
- Jack independently load tested for quality assurance
- Backed by over forty years of jack stand manufacturing experience

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------|---------|---|
| MJAXB | 781460 | Max Jax Basic |
| MJAXKIT1 | 781403 | Max Jax Kit No. 1 - includes basic stand, roller head kit & casters |
| Max Jax* Accessories | | |
| 781381 | 781381 | Large Aluminum Roller Wheels (4) |
| 781382 | 781382 | Stainless Steel Sleeves (4) |
| 781383 | 781383 | Ball Transfers |
| 781394 | 781394 | Rubber Wheel Kit (4) |
| 781397 | 781397 | Stainless Steel Ball Transfers |
| 781406 | 781406 | Roller Head Kit (4 wheels) |
| 781407 | 781407 | Stainless Steel Roller Head Kit (4 wheels) |
| 781464 | 781464 | Caster Kit (5) Standard |
| 781465 | 781465 | Caster Kit (5) Steel Casters |
| 781050 | 781050 | Hold Down Device |
| 781056 | 781056 | Hold Down Device Chain Ext. Kit (12") |

MAX JAX* 2 STAND



The MAX JAX* 2 stand has the unique capability of being a low or a high moving jack stand for 4 - 36" (100 - 915 mm) pipe. By quickly removing the jack head and casters from the base, it can be rotated from a high position to a low position.

Special Features:

- 4,500 lbs. load capacity
- 4 to 36" diameter pipe capacity
- Base flips, offering a height range of 22" to 29" or 30" to 37" with the Drop Slot Head
- Drop-slot roller wheel head offers more wheel contact with pipe
- Roll pipe through a fabrication shop
- Height range of 20" to 29" or 23" to 35"

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------|---------|--|
| MJAX2RR | 786451 | Max Jax* Kit 2 w/ Drop Slot Head |
| MJAX2 | 786450 | Max Jax* Kit 2 w/ Large Vee & Rollers |
| Max Jax* Accessories | | |
| 781381 | 781381 | Large Aluminum Roller Wheels (4) |
| 781382 | 781382 | Stainless Steel Sleeves (4) |
| 781383 | 781383 | Ball Transfers |
| 781394 | 781394 | Rubber Wheel Kit (4) |
| 781397 | 781397 | Stainless Steel Ball Transfers |
| 781406 | 781406 | Roller Head Kit (4 wheels) |
| 781407 | 781407 | Stainless Steel Roller Head Kit (4 wheels) |
| 781464 | 781464 | Caster Kit (5) Standard |
| 781465 | 781465 | Caster Kit (5) Steel Casters |
| 781050 | 781050 | Hold Down Device |
| 781056 | 781056 | Hold Down Device Chain Ext. Kit (12") |



BEAM JAX™



Move beams around the shop safely.

Special Features:

- Steel casters now standard
- 2,500 lbs. capacity
- Holds beams up to 24" (61 cm)
- Clamping device centers load on stand and holds material in place while moving around shop
- 5-leg base construction ensures stability
- Reversible beam forks
- Detachable handle can be rotated out of operator's way
- Quick action brake

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------------------|
| BJAX | 781485 | Basic Beam Jax™ |
| BJAXKIT | 781486 | Beam Jax™ Kit (Beam Jax & Casters) |

JACKS

ECONO MAC 75



Special Features:

- 2,500 lbs. capacity
- Self-lubricating Roller Bearings – no grease required
- One-bolt disassembly – no welding required for service
- Double pronged pin

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------------------|
| 780935 | 780935 | No. 75 Econo Mac Reel Jack |

REEL MAC™ JACKS



Reel Mac™ jacks are available in three styles. Style numbers 60 and 70 feature screw-type adjustment with large 1-1/2" screws and large, easy to use handles. Style 80 features a ratchet drive to assist with larger loads.

Special Features:

- Weight Capacity of style #80 and #60 is 3,750 lbs.
- Weight Capacity of style #70 is 2,500 lbs.
- Height range of 13" - 27" (780941) to 21" - 54" (780942) to 28" - 45" (780943)
- All steel construction
- Rugged design for job site use
- Dependable Sumner quality

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------------------------|
| 780941 | 780941 | REEL MAC™ JACK SCREW-TYPE #60 |
| 780942 | 780942 | REEL MAC™ JACK SCREW-TYPE #70 |
| 780943 | 780943 | REEL MAC™ JACK RATCHET DRIVE #80 |

HOLD-DOWN DEVICE



Ideal for fitting up flanges, fittings or valves, and a must when working with short lengths.

Special Features:

- High tensile strength chain for gripping up to 12" pipe onto the large vee head when either welding or using the Max Jax for material handling
- 12 Inch chain extensions are available for increased capacity

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---------------------------------------|
| 781050 | 781050 | Hold Down Device |
| 781056 | 781056 | Hold Down Device Chain Ext. Kit (12") |

HOLD-E DEVICE



A quick, easy, safe clamp for holding pipe in vee head jack stands.

Special Features:







- Grips 3/4" - 6" pipe (20 - 152 mm) or 1" - 6-1/2" tubing (25 - 165 mm)
- Quick release button allows clamp arms to open and close in seconds
- Rugged steel frame for years of use







SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--------------------------------|
| 785000 | 785000 | Hold-E Pipe Clamp (3/4" to 6") |
| 784999 | 784999 | SS Hold-E Clamp (3/4" to 6") |

JACKS

SPECIFICATIONS

| Pipe Stand | Part # | Description | Load Capacity | Min. Pipe Capacity | Max. Pipe Capacity | Min. Height | Max. Height | Width | Length | Weight |
|---|----------------------|-------------------------|----------------|--------------------|--------------------|----------------|-----------------|--------------------|--------------------|---------|
| FOLD-A-JACK™ | | | | | | | | | | |
|  | 781300 | HI FAJ - Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | 28" (71 cm) | 49" (125 cm) | 22" (56 cm) | 22" (56 cm) | 25 lbs. |
| | 781301 | HI FAJ - Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 28 lbs. |
| | 781302 | HI FAJ - Bar Stock | 2,000 lbs. | 1/8" (3 mm) | 10" (250 mm) | | | | | 25 lbs. |
| | 781303 | HI FAJ - SS Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 29 lbs. |
| | 781304 | HI FAJ - SS Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | | | | | 24 lbs. |
| | 781305 | HI FAJ - Ball Trans | 1,000 lbs. | 3/8" (10 mm) | 12" (300 mm) | | | | | 29 lbs. |
| | 781306 | HI FAJ - Rubber Whls | 1,000 lbs. | 1-1/2" (40 mm) | 24" (600 mm) | 26 lbs. | | | | |
| | 781310 | LO FAJ - Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | 21" (51 cm) | 36" (89 cm) | 15-1/2" (39 cm) | 15-1/2" (39 cm) | 21 lbs. |
| | 781311 | LO FAJ - Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 24 lbs. |
| | 781313 | LO FAJ - SS Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 24 lbs. |
| | 781314 | LO FAJ - SS Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | | | | | 22 lbs. |
| | 781315 | LO FAJ - SS Vee | 1,000 lbs. | 3/8" (10 mm) | 12" (300 mm) | | | | | 25 lbs. |
| 781316 | LO FAJ - Rubber Whls | 1,000 lbs. | 1-1/2" (40 mm) | 24" (600 mm) | 22 lbs. | | | | | |
| HEAVY DUTY JACKS | | | | | | | | | | |
|  | 780375 | HI HD - Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | 28" (71 cm) | 49" (125 cm) | 22" (56 cm) | 22" (56 cm) | 24 lbs. |
| | 780376 | HI HD - Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 27 lbs. |
| | 780377 | HI HD - Bar Stock | 2,000 lbs. | 1/8" (3 mm) | 10" (250 mm) | | | | | 24 lbs. |
| | 780378 | HI HD - SS Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 28 lbs. |
| | 780379 | HI HD - SS Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | | | | | 24 lbs. |
| | 780380 | HI HD - Ball Trans | 1,000 lbs. | 3/8" (10 mm) | 12" (300 mm) | | | | | 27 lbs. |
| | 780381 | HI HD - Rubber Whls | 1,000 lbs. | 1-1/2" (40 mm) | 24" (600 mm) | 26 lbs. | | | | |
| | 780385 | LO HD - Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | 21" (51 cm) | 36" (89 cm) | 15-1/2" (39 cm) | 15-1/2" (39 cm) | 19 lbs. |
| | 780386 | LO HD - Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 22 lbs. |
| | 780387 | LO HD - Bar Stock | 2,000 lbs. | 1/8" (3 mm) | 24" (600 mm) | | | | | 18 lbs. |
| | 780388 | LO HD - SS Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 22 lbs. |
| | 780389 | LO HD - SS Vee | 2,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | | | | | 19 lbs. |
| | 780390 | LO HD - Ball Trans | 1,000 lbs. | 3/8" (10 mm) | 12" (300 mm) | | | | | 22 lbs. |
| | 780391 | LO HD - Rubber Whls | 1,000 lbs. | 1-1/2" (40 mm) | 24" (600 mm) | 21 lbs. | | | | |
| HEAVY DUTY JACK PLUS | | | | | | | | | | |
|  | 780326 | HD PLUS - Vee | 3,500 lbs. | 1/8" (3 mm) | 24" (600 mm) | 28" (71 cm) | 49" (125 cm) | 22" (56 cm) | 22" (56 cm) | 24 lbs. |
| PRO JACK® | | | | | | | | | | |
|  | 780471 | HI PRO - Vee | 2,000 lbs. | 1/8" (3 mm) | 24" (600 mm) | 28" (71 cm) | 49" (125 cm) | 24" (61 cm) | 24" (61 cm) | 23 lbs. |
| | 780472 | HI PRO - Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 26 lbs. |
| | 780473 | HI PRO - Bar Stock | 2,000 lbs. | 1/8" (3 mm) | 10" (250 mm) | | | | | 23 lbs. |
| | 780474 | HI PRO - SS Roller | 2,000 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | | | | | 26 lbs. |
| | 780475 | HI PRO - SS Vee | 2,000 lbs. | 1/8" (3 mm) | 24" (600 mm) | | | | | 24 lbs. |
| | 780476 | HI PRO - Ball Trans | 1,000 lbs. | 3/8" (10 mm) | 12" (300 mm) | | | | | 28 lbs. |
| | 780477 | HI PRO - Rubber Whls | 1,000 lbs. | 1-1/2" (40 mm) | 24" (600 mm) | | | | | 25 lbs. |
| | FAT JACK™ | | | | | | | | | |
|  | 785250 | Maxi Fat Jack™ - Vee | 6,000 lbs. | 1/8" (3 mm) | 36" (900 mm) | Mini - 23.5" | 61" (154.9 cm) | 34" (86.3 cm) | 34" (86.3 cm) | 47 lbs. |
| | 785251 | Midi Fat Jack™ - Vee | | | | to 28" | 44.5" (113 cm) | 21" (53.3 cm) | 21" (53.3 cm) | 37 lbs. |
| | 785252 | Mini Fat Jack™ - Vee | | | | Midi - 39" | 28.5" (72.4 cm) | 19" (48.3 cm) | 19" (48.3 cm) | 28 lbs. |
| | 785255 | Maxi Fat Jack™ - Roller | | | | to 47" | 61" (154.9 cm) | 34" (86.3 cm) | 34" (86.3 cm) | 47 lbs. |
| | 785256 | Midi Fat Jack™ - Roller | | | | Maxi - 47" to | 44.5" (113 cm) | 21" (53.3 cm) | 21" (53.3 cm) | 37 lbs. |
| | 785257 | Mini Fat Jack™ - Roller | | | | 59" & 53" | 28.5" (72.4 cm) | 19" (48.3 cm) | 19" (48.3 cm) | 28 lbs. |
| FAB SAF™ JACK | | | | | | | | | | |
|  | 780395 | FAB SAF™ - Vee | 3,500 lbs. | 1/8" (3 mm) | 36" (900 mm) | 38" (81 cm) | 52" (132 cm) | 30" (76 cm) | 30" (76 cm) | 39 lbs. |
| | 780400 | FAB SAF™ - Roller | 2,500 lbs. | 1-1/4" (30 mm) | 24" (600 mm) | 38" (81 cm) | 52" (132 cm) | 30" (76 cm) | 30" (76 cm) | 42 lbs. |

| Pipe Stand | Part # | Description | Load Capacity | Min. Pipe Capacity | Max. Pipe Capacity | Min. Height | Max. Height | Width | Length | Weight |
|---|---------------------|---|---------------|--------------------|--------------------|-----------------|------------------|-----------------|-----------------|----------|
| HI BOY™ | | | | | | | | | | |
|  | 783250 | HI BOY™ | 1,000 lbs. | 1/8" (3 mm) | 24" (600 mm) | 39" (98 cm) | 72" (180 cm) | 38" (97 cm) | 38" (97 cm) | 45 lbs. |
| ADJUST-A-ROLLS™ | | | | | | | | | | |
|  | 780365 | HI AAR - Steel Whls | 2,500 lbs. | 1/2" (12 mm) | 36" (900 mm) | 31" (78 cm) | 23" (58 cm) | 32" (81 cm) | | 35 lbs. |
| | 780366 | HI AAR - Ball Trans | 1,000 lbs. | | | | | | | 38 lbs. |
| | 780367 | HI AAR - Rubber Whls | 1,200 lbs. | | | | | | | 34 lbs. |
| | 780368 | HI AAR - SS Whls | 2,000 lbs. | | | | | | | 35 lbs. |
| | 780369 | HI AAR - Bar Stock | 2,000 lbs. | | | | | | | 39 lbs. |
| | 780370 | LO AAR - Steel Whls | 2,500 lbs. | | | | | | | 34 lbs. |
| | 780371 | LO AAR - Ball Trans | 1,000 lbs. | | | | | | | 24 lbs. |
| | 780372 | LO AAR - Rubber Whls | 1,200 lbs. | 1/2" (12 mm) | 36" (900 mm) | 24" (61 cm) | 22" (56 cm) | 31" (79 cm) | | 32 lbs. |
| | 780373 | LO AAR - SS Whls | 2,000 lbs. | | | | | | | 34 lbs. |
| | 780359 | LO AAR - Bar Stock | 2,000 lbs. | | | | | | | 37 lbs. |
| | 780360 | TBL AAR - Steel Whls | 2,500 lbs. | | | 7" (18 cm) | | | | 22 lbs. |
| | 780361 | TBL AAR - Ball Trans | 1,000 lbs. | | | 5-3/4" (15 cm) | | | | 22 lbs. |
| | 780362 | TBL AAR - Rubber Whls | 1,200 lbs. | 1/2" (12 mm) | 36" (900 mm) | 7" (18 cm) | 6-1/4" (16 cm) | 22" (56 cm) | | 20 lbs. |
| | 780363 | TBL AAR - SS Whls | 2,000 lbs. | | | 7" (18 cm) | | | | 22 lbs. |
| 780364 | TBL AAR - Bar Stock | 2,000 lbs. | | | 5-3/4" (15 cm) | | | | 24 lbs. | |
| PRO ROLL™ | | | | | | | | | | |
|  | 780441 | PRO ROLL™ - Steel Whls | 2,500 lbs. | 1/2" (12 mm) | 36" (900 mm) | 29" (74 cm) | 43" (109 cm) | 23" (58 cm) | 32" (81 cm) | 47 lbs. |
| | 780442 | PRO ROLL™ - Ball Trans | 1,000 lbs. | | | | | | | 49 lbs. |
| | 780443 | PRO ROLL™ - Rubber Whls | 1,200 lbs. | | | | | | | 45 lbs. |
| | 780444 | PRO ROLL™ - SS Whls | 2,000 lbs. | | | | | | | 47 lbs. |
| | 780446 | PRO ROLL™ - Bar Stock | 2,000 lbs. | | | | | | | 49 lbs. |
| BIG V™ JACK | | | | | | | | | | |
|  | 780260 | Big V* | 2,500 lbs. | 4" (100 mm) | 36" (900 mm) | 29-1/2" (75 cm) | 41" (104 cm) | 29-1/2" (75 cm) | 29-1/2" (75 cm) | 36 lbs. |
| MAX JAX* I & II | | | | | | | | | | |
|  | 781460 | Max Jax* Basic | 4,500 lbs. | 4" (100 mm) | 36" (900 mm) | 21" (53 cm) | 33" (84 cm) | 29-5/8" (75 cm) | 29-5/8" (75 cm) | 68 lbs. |
| | 781403 | Max Jax* Kit Includes Casters (Roller Head) | | | | 30-1/2" (78 cm) | 42-1/2" (108 cm) | 34" (100 cm) | 34" (100 cm) | 144 lbs. |
| | 786450 | Max Jax* 2 Kit #1 (Vee Head) | | | | 52" (133 cm) | 74" (188 cm) | 37.5" (95 cm) | 37.5" (95 cm) | 106 lbs. |
| | 786451 | Max Jax* 2 Kit #2 (Drop Slot Head) | | | | 20" (58 cm) | 35" (91 cm) | 37.5" (95 cm) | 37.5" (95 cm) | 127 lbs. |
| MAX-JAX* AND MAX-JAX* 2 HEAD STYLES | | | | | | | | | | |
|  | 781382 | BV/MJ - SS Sleeves | 4,500 lbs. | 4" (100 mm) | 36" (900 mm) | NA | | | | 8 lbs. |
| | 781383 | BV/MJ - Ball Trans | 1,000 lbs. | 3/8" (9 mm) | 36" (900 mm) | | | | | 8 lbs. |
| | 781394 | BV/MJ - Rubber Whls | 1,000 lbs. | 4" (100 mm) | 36" (900 mm) | | | | | 8 lbs. |
| | 781397 | BV/MJ - SS Ball Trans | 1,000 lbs. | 3/8" (9 mm) | 36" (900 mm) | | | | | 5 lbs. |
| | 781406 | BV/MJ - Roller | 4,500 lbs. | 4" (100 mm) | 36" (900 mm) | | | | | 8 lbs. |
| | 781407 | BV/MJ - SS Roller | 2,000 lbs. | 4" (100 mm) | 36" (900 mm) | | | | | 8 lbs. |

JACKS

HEAD STYLES FOR SUMNER'S PRO JACK*, HEAVY DUTY AND FOLD-A-JACK* STANDS

| Head Style | Part # | Description | Capacity | Pipe Size Maximum |
|---|----------------------------|--------------------------------------|------------|-------------------|
|  | 780518 | Standard Vee Head | 2,500 lbs. | 24" (600 mm) |
| | 780498 | Standard Vee Head w/SS Sleeve | | |
|  | 780518 & 780551 | Ball Transfer Head | 1,000 lbs. | 12" (300 mm) |
| | 780518 & 780274 | Ball Transfer Head (Stainless Steel) | | |
|  | 780514 | Roller Head Assy. w/Aluminum Wheels | 2,500 lbs. | 24" (600 mm) |
| | 780517 | Roller Head Assy. w/SS Wheels | | |
|  | 780499 | Rubber Wheel Head | 1,000 lbs. | 24" (600 mm) |
|  | 780519 (Hi) 780944 (Lo) | Bar Stock Head | 2,000 lbs. | 24" (600 mm) |

SPECIFICATIONS

CARTS & STORAGE

- Bundle Mac™
- Cricket™
- Single cylinder cart
- Double cylinder cart
- Small double cylinder carts
- Medium double cylinder carts
- Grasshopper™
- Handi-Bench
- Hanger Mac™
- Pipe Mac™
- Mac Rack I™
- Mac Rack II™



CARTS & STORAGE

CRICKET™

Special Features:

- Transports 20 ft. (6.1 m) pipe lengths up to 1,000 lbs.
- Comes with ratchet hold-down strap and 16" (41 cm) tubed tires
- Weighs only 82 lbs. and can be shipped UPS
- Quick handle disconnect for compact storage
- Carries up to 12" (300 mm) diameter pipe

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-----------------------------|
| 782699 | 782699 | Cricket™ |
| 782685 | 782685 | Cricket™ w/ Flat Free Tires |



GRASSHOPPER™

Special Features:

- Enables one man to lift 2,000 lbs. unassisted
- Special sliding chain block design accommodates long and short loads
- Carries up to 20" (500 mm) diameter pipe, tool boxes, fittings and valves
- Fits through 35" (89 cm) openings
- Rugged high pressure tires and wheels allow for construction site mobility
- Chains can be used to lock wheels for security

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--------------|
| ST-401 | 780351 | Grasshopper™ |



CARTS & STORAGE

HANDI-BENCH



Special Features:

- Tough #9 expanded metal top
- 600 lbs. load capacity
- 1" (2.5 cm) square tube frame
- One piece construction
- Convenient 36" (90 cm) work height
- Compact and lightweight
- Quick action plunger lock
- 24" x 40" (60 x 100 cm) work surface
- Complete with built-in torch holder
- Optional 8" (200 mm) wheel kit

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-----------------|
| 783980 | 783980 | HB-604 Weld Top |
| 783965 | 783965 | 8" Wheel Kit |



PIPE MAC™



783230

Special Features:

- Transports 2,000 lbs. of pipe, individually or up to a height of 34" (86 cm)
- Six 6" heavy duty casters
- Center-positioned casters makes rolling the Pipe Mac™ easy and enables quick cart rotation for tight turns
- Posts pull out for compact storage
- Stacks when not in use
- Simple but rugged attachment prevents pipe from rolling while the Pipe Mac™ is in motion
- Easily slips over the four post holders-no tools required

Vee Attachment included!

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------------------|
| PMAC | 783230 | Pipe Mac™ w/Vee |
| PMACVEE | 783240 | Pipe Mac™ Vee Attachment only |



783240

CARTS & STORAGE

HANGER MAC™



Special Features:

- Improves productivity by transporting from shop to site
- Eliminates multiple handling and reduces fabrication transport costs
- Available with or without wire mesh base
- Stacks with other Mac carts
- Hanger Mac™ cart holds 40 6-8" and 120 2-4" pipe hangers
- Folds for compact storage or transportation without tools

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------------------|
| 785650 | 785650 | Hanger Mac™ cart without mesh base |
| 785651 | 785651 | Hanger Mac™ cart with mesh base |



BUNDLE MAC™



Transports large quantities of conduit, strut, threaded rod, pvc pipe or copper tubing in one large cradle.

Special Features:

- Holds large bundles of conduit
- Large storage capacity
- Arms fold in seconds for convenient storage
- 1,000 lbs. load capacity
- Stacks with all Mac carts
- Patented stacking feature: stack similar carts together or with other Stacking Mac Rack products
- Shipped assembled with 6" heavy duty casters
- Durable powder coat finish
- Jobsite tough

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------|
| BMAC | 783320 | Bundle Mac™ |

CARTS & STORAGE

MAC RACK I™



A mobile jobsite conduit and pipe storage cart.

Special Features:

- 1,000 lbs. weight capacity
- Double wall square tubing
- Eight storage sections
- Arms fold easily with plunger pins
- Shipped assembled with 6" heavy duty casters standard with each Mac Rack
- Durable powder coat finish
- Priced for all budgets
- Patented stacking feature: Stack similar carts together or with other Stacking Macs
- Jobsite tough

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------|
| MRACKI | 783317 | MAC RACK I™ |



MAC RACK II™



A mobile jobsite conduit and pipe storage rack cart.

Special Features:

- 1,000 lbs. weight capacity
- Double wall square tubing
- Eight storage sections
- Arms fold easily with plunger pins
- Shipped assembled with 6" heavy duty casters standard with each Mac Rack II™
- Durable powder coat finish
- Priced for all budgets
- Patented stacking feature: stack similar carts together or with other Stacking Macs
- Jobsite tough

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--------------|
| MRACKII | 783299 | MAC RACK II™ |

SMALL DOUBLE CYLINDER CARTS

Small Double Cylinder Carts

Special Features:

- The Model #209 cart holds one 244-330 cu ft. (9-1/4") oxygen tank and one 145 cu ft. (8-1/2") acetylene tank and is equipped with a 9 x 18" (22.9 x 45.7 cm) base plate
- The Model #213 cart can hold one 244-330 cu ft. (9-1/4") oxygen tank and one 210-420 cu ft. (13") acetylene tank and is equipped with a 13 x 25" (33 x 63.5 cm) base plate
- Both models have a large, open tool tray as standard equipment
- Options include safety chain or steel containment bar and a range of wheels



782426



782428

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------|---------|--------------------------------------|
| 209-10S | 782420 | Cylinder Cart - 209-10S - 10" wheel |
| 209-10SB | 782421 | Cylinder Cart - 209-10SB - 10" wheel |
| 209-10P | 782422 | Cylinder Cart - 209-10P - 10" wheel |
| 209-14S | 782424 | Cylinder Cart - 209-14S - 14" wheel |
| 209-14SB | 782425 | Cylinder Cart - 209-14SB - 14" wheel |
| 209-16P | 782426 | Cylinder Cart - 209-16P - 16" wheel |
| 209-16PB | 782427 | Cylinder Cart - 209-16PB - 16" wheel |
| 209-16F | 782428 | Cylinder Cart - 209-16F - 16" wheel |
| 213-25W | 782475 | Cylinder Cart - 213-25W - 25" wheel |
| 213-14S | 782480 | Cylinder Cart - 213-14S - 14" wheel |
| 213-16P | 782482 | Cylinder Cart - 213-16P - 16" wheel |
| 213-16PB | 782483 | Cylinder Cart - 213-16PB - 16" wheel |

MEDIUM DOUBLE CYLINDER CARTS

Double cylinder carts with lifting eye and/or fire wall
(Models #209 & #213)

Special Features:

- The high rail feature secures tanks on to the cart while moving around jobsite situations
- The Model #209 cart holds one 244-330 cu ft. (9-1/4") oxygen tank and one 145 cu ft. (8-1/2") acetylene tank and is equipped with a 9 x 18" (22.9 x 45.7 cm) base plate
- Model #213 cart can hold one 244-330 cu ft. (9-1/4") oxygen tank and one 210-420 cu ft. (13") acetylene tank and is equipped with a 13 x 25" (33 x 63.5 cm) base plate
- Both models have a large, open tool tray as standard equipment
- Options include safety chain or steel containment bar and a range of wheels

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-------------|---------|---|
| 209-14SB-LF | 782439 | Cylinder Cart - 209-14SB-LF - 14" wheel |
| 209-14SB-L | 782441 | Cylinder Cart - 209-14SB-L - 14" wheel |
| 209-16PB-LF | 782443 | Cylinder Cart - 209-16PB-LF - 16" wheel |
| 209-16FB-LF | 782444 | Cylinder Cart - 209-16FB-LF - 16" wheel |
| 213-25WB-LF | 782476 | Cylinder Cart - 213-25WB-LF - 25" wheel |
| 213-14SB-LF | 782491 | Cylinder Cart - 213-14SB-LF - 14" wheel |
| 213-14SB-L | 782493 | Cylinder Cart - 213-14SB-L - 14" wheel |
| 213-16PB-LF | 782495 | Cylinder Cart - 213-16PB-LF - 16" wheel |
| 213-16FB-LF | 782496 | Cylinder Cart - 213-16FB-LF - 16" wheel |
| 213-25PB-LF | 782497 | Cylinder Cart - 213-25PB-LF - 25" wheel |
| 213-16P | 782482 | Cylinder Cart - 213-16P - 16" wheel |
| 213-16PB | 782483 | Cylinder Cart - 213-16PB - 16" wheel |



782439

** Lifting eye carts comply with ASME B30.20, AWS D14.1 and AISC codes.

*** Fire-rated wall complies with OSHA 1926.350 & OSHA 1910.253.

SINGLE CYLINDER CART



782375

Small cylinder cart (Model #108).

Special Features:

- Designed to transport small cylinders up to 8-1/4" (21 cm) diameter
- Perfect for moving acetylene "B" tanks or fire extinguishers around jobsites
- Comes with 8" rubber wheels and safety chain

Heavy duty, single cylinder cart (Model #112).

- Popular cylinder truck can be used for gas cylinders up to 12" (30 cm) or for hauling boxes on the 7 x 14" (17.8 x 35.6 cm) base plate
- Load capacity rated at 500 lb

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------------------------|
| 108-8S | 782375 | Cylinder Cart - 108-8S - 8" wheel |
| 112-10S | 782385 | Cylinder Cart - 112-10S - 10" wheel |
| 112-10P | 782386 | Cylinder Cart - 112-10P - 10" wheel |

DOUBLE CYLINDER CART



782359

Small-medium range, high rail cylinder carts (Models #207 & #208).

Special Features:


- The small-medium range cylinder carts feature a balanced design for comfortable handling on smooth, level surfaces
- Carts come with trays and hose hooks. Handle grips offer better control and stability

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|-------------------------------------|
| 207-10S | 782359 | Cylinder Cart - 207-10S - 10" wheel |
| 207-8S | 782360 | Cylinder Cart - 207-8S - 8" wheel |
| 208-8S | 782379 | Cylinder Cart - 208-8S - 8" wheel |
| 208-10S | 782380 | Cylinder Cart - 208-10S - 10" wheel |

HOW TO READ SUMNER* CYLINDER CART PRODUCT DESCRIPTIONS

X X X - X X X X - X X

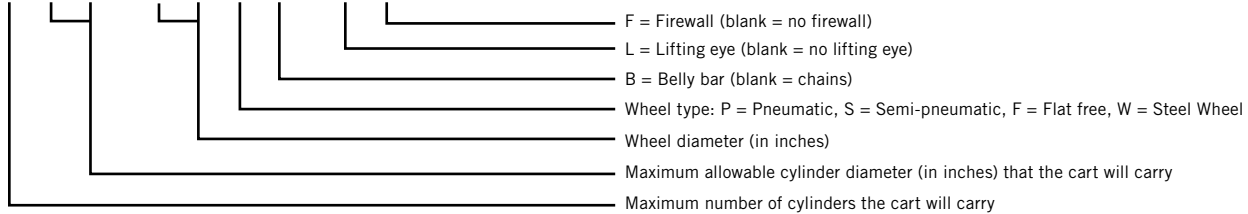


| Wheel | Part # | Description | Diameter | Width | Bore | Bearing | Load Capacity | Fits Carts |
|---|--------|----------------|-----------------|------------------|------------------|----------------------|---------------|--------------------------|
| CYLINDER CART WHEELS | | | | | | | | |
|  | 779024 | Semi-pneumatic | 8" (200 mm) | 1.75" (44 mm) | 0.5" (13 mm) | Powder Metal Bushing | 80 lbs. | 108 207 208 |
|  | 779031 | Semi-pneumatic | 8" (200 mm) | 2" (50 mm) | 0.5" (13 mm) | Steel Bushing | 400 lbs. | 207 208 |
|  | 779011 | Semi-pneumatic | 10" (250 mm) | 2.75" (70 mm) | 5/8" (16 mm) | Bronze Bushing | 400 lbs. | 112 207 208 209 |
|  | 779027 | Pneumatic | 10" (250 mm) | 3.5" (89 mm) | 5/8" (16 mm) | Bronze Bushing | 350 lbs. | 112 209 |
|  | 779028 | Semi-pneumatic | 14" (355 mm) | 1.75" (44 mm) | 5/8" (16 mm) | Bronze Bushing | 150 lbs. | 209 213 |
|  | 779104 | Flat Free | 16" (400 mm) | 4.8" (120 mm) | 1" (25 mm) | Powder Metal Bushing | 380 lbs. | 209 213 |
|  | 779107 | Pneumatic | 16" (400 mm) | 4.8" (120 mm) | 1" (25 mm) | Powder Metal Bushing | 380 lbs. | 209 213 |
|  | 780521 | Pneumatic | 25" (50 mm) | 4" (100 mm) | 1.25" (32 mm) | Bronze Bushing | 800 lbs. | 213 |
|  | 782575 | Steel | 25" (635 mm) | 2" (50 mm) | 1.25" (32 mm) | Bronze Bushing | 800 lbs. | 213 |

- 2 = Carries two cylinders
- 13 = 13 inch maximum cylinder diameter
- 16 = 16 inch wheel size
- F = Flat free tire
- B = Belly bar
- L = Lifting eye
- F = Firewall


SPECIFICATIONS

SPECIALTY LIFTS

EL-405 Stacker Lift
Roust-A-Bout™
FAB-MATE™
Short Stack™

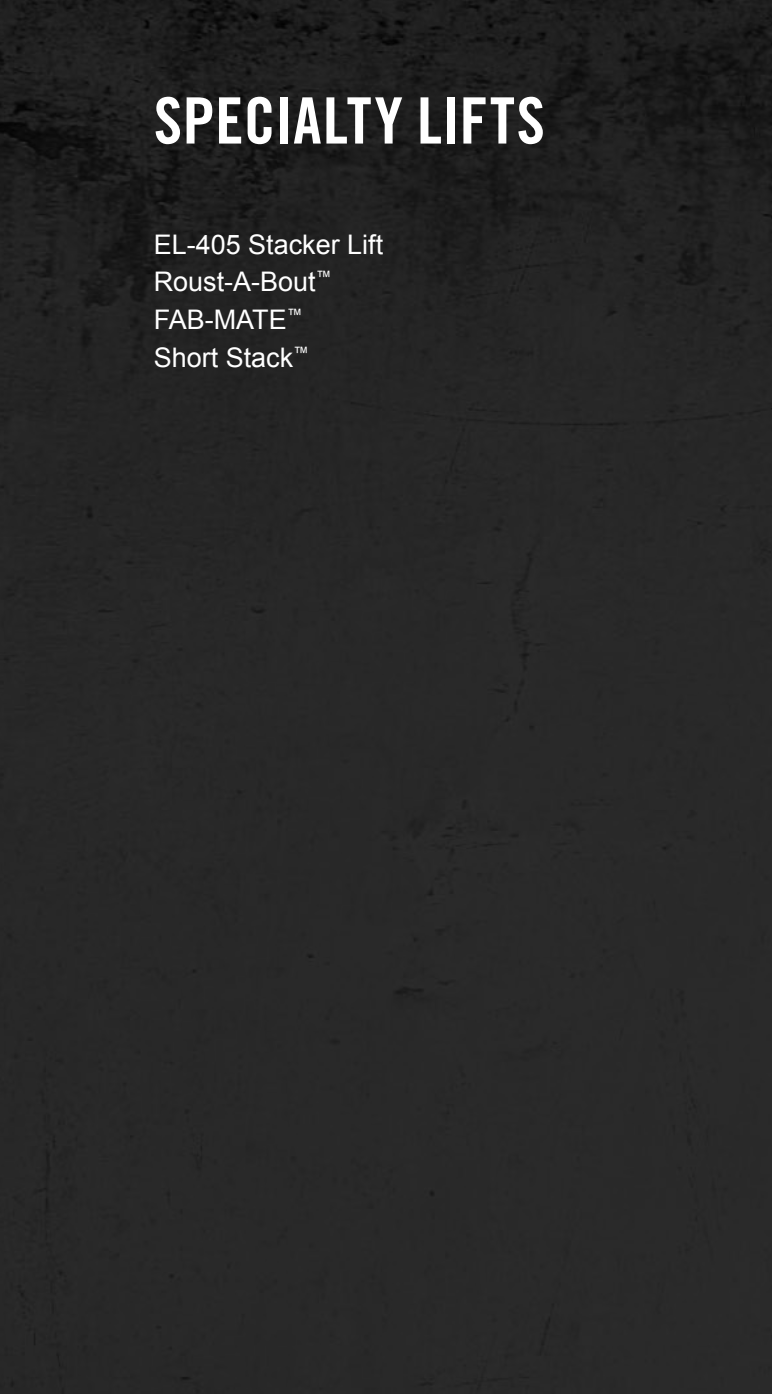

EL-405 STACKER LIFT

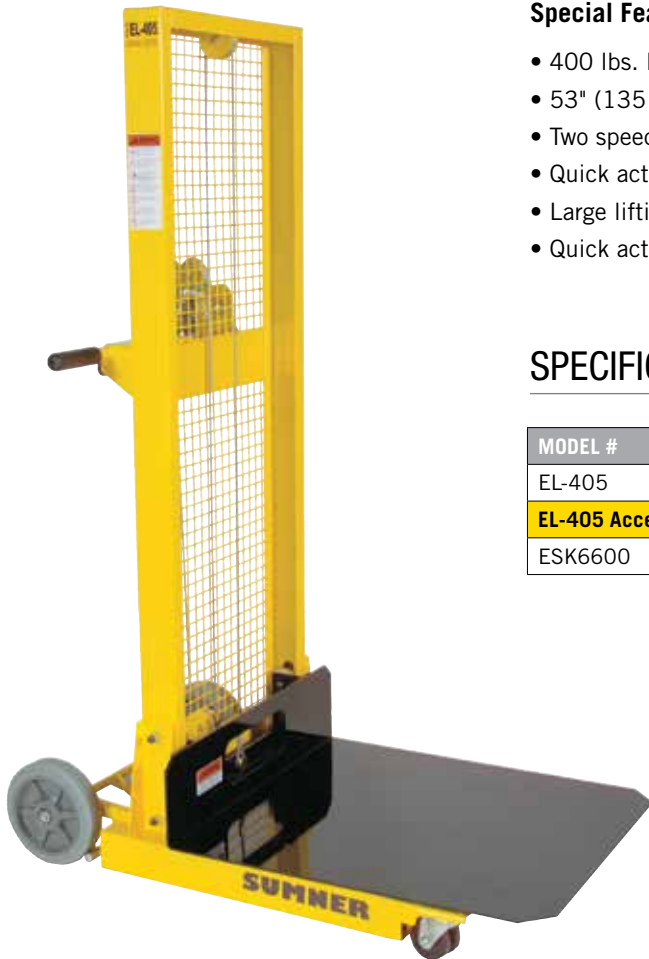

Special Features:

- 400 lbs. lifting capacity
- 53" (135 cm) lifting height
- Two speed winch handle position
- Quick action wheel brake
- Large lifting surface
- Quick action retention strap

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------------------------|---------|---------------------|
| EL-405 | 784650 | Stacker Lift |
| EL-405 Accessories | | |
| ESK6600 | 784685 | Extension Strap Kit |



SPECIALTY LIFTS

ROUST-A-BOUT™



The Sumner Roust-A-Bout™ lift enables one person to lift and place loads in tight locations that would be impossible with other lifts.

Special Features:

- Lifts 1,500 lbs.
- 15', 18' and 25' heights (4.6 m, 5.5 m and 7.6 m)
- Moves vertically and horizontally
- 2 Winches: operate load and mast elevation separately
- 4-speed load winches
- Infinite load height adjustment
- Ideal for jobsite or shop
- Mast and base separate quickly for easy transport

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------------------|---------|---|
| R-100 | 780300 | R-100 ROUST-A-BOUT™, 15' Top Ht |
| R-150 | 780301 | R-150 ROUST-A-BOUT™, 15' Top Ht |
| R-180 | 780302 | R-180 ROUST-A-BOUT™, 18' Top Ht |
| R-250 | 780303 | R-250 ROUST-A-BOUT™, 25' Top Ht |
| R-100G | 780195 | R-100G ROUST-A-BOUT™, 15' Top Ht - Galvanized |
| R-150G | 780194 | R-150G ROUST-A-BOUT™, 15' Top Ht - Galvanized |
| R-180G | 780197 | R-180G ROUST-A-BOUT™, 18' Top Ht - Galvanized |
| R-250G | 780196 | R-250G ROUST-A-BOUT™, 25' Top Ht - Galvanized |
| Roust-A-Bout™ Accessories | | |
| R-100/150 | 781060 | Tee-Head Extension Bar |
| R-100/150 | 781061 | Tee-Head Extension Bar |
| R-100/150 | 781062 | Tee-Head Extension Bar |

FAB-MATE™



This versatile lift can accommodate many lifting tasks and is easily operated by one man. With a diverse array of accessories, the Fab-Mate™ can be used to position fittings, align flanges, or move plates.

Special Features:

- 1,000 lbs., 7 ft. (2.1 m), lifting capacity
- Moves loads vertically and horizontally at the same time
- Sumner-built single-speed winch offers infinite positioning for accurate fit-ups
- 8" casters (200 mm) and special base allows load to "get close to the work"

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|----------------|
| FMATE | 783900 | FAB-MATE™ Lift |

SHORT STACK™



Lift up to 800 lbs. at heights from 12'11" to 16'3".
No tools required and no loose hardware.

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|--|
| 2012S | 784094 | 2012S Material Lift Short Stack (12'/800 lbs.) |
| 2016S | 784085 | 2016S Material Lift Short Stack (16'/800 lbs.) |
| 2012GS | 784093 | 2012GS Material Lift Short Stack (12'/800 lbs.) - Galvanized |
| 2016GS | 784086 | 2016GS Material Lift Short Stack (16'/800 lbs.) - Galvanized |

Short Stack™ Accessories

| | | |
|--------|--------|------------------|
| 783881 | 783881 | Cable Stay Brake |
| 783705 | 783705 | Pipe Cradle |
| 784070 | 784070 | Foot Jack |
| 783642 | 783642 | Boom Carriage |
| 786320 | 786320 | Tray |
| 783691 | 783691 | Fork Extensions |

MATERIAL LIFTS

Series 1900

Series 2000

Series 2100


Series 2200 Lil' Hoister

Series 2300 Drywall/HVAC Lift

Series 2400

Series 2500 Counter Weight Lift

Series 2600

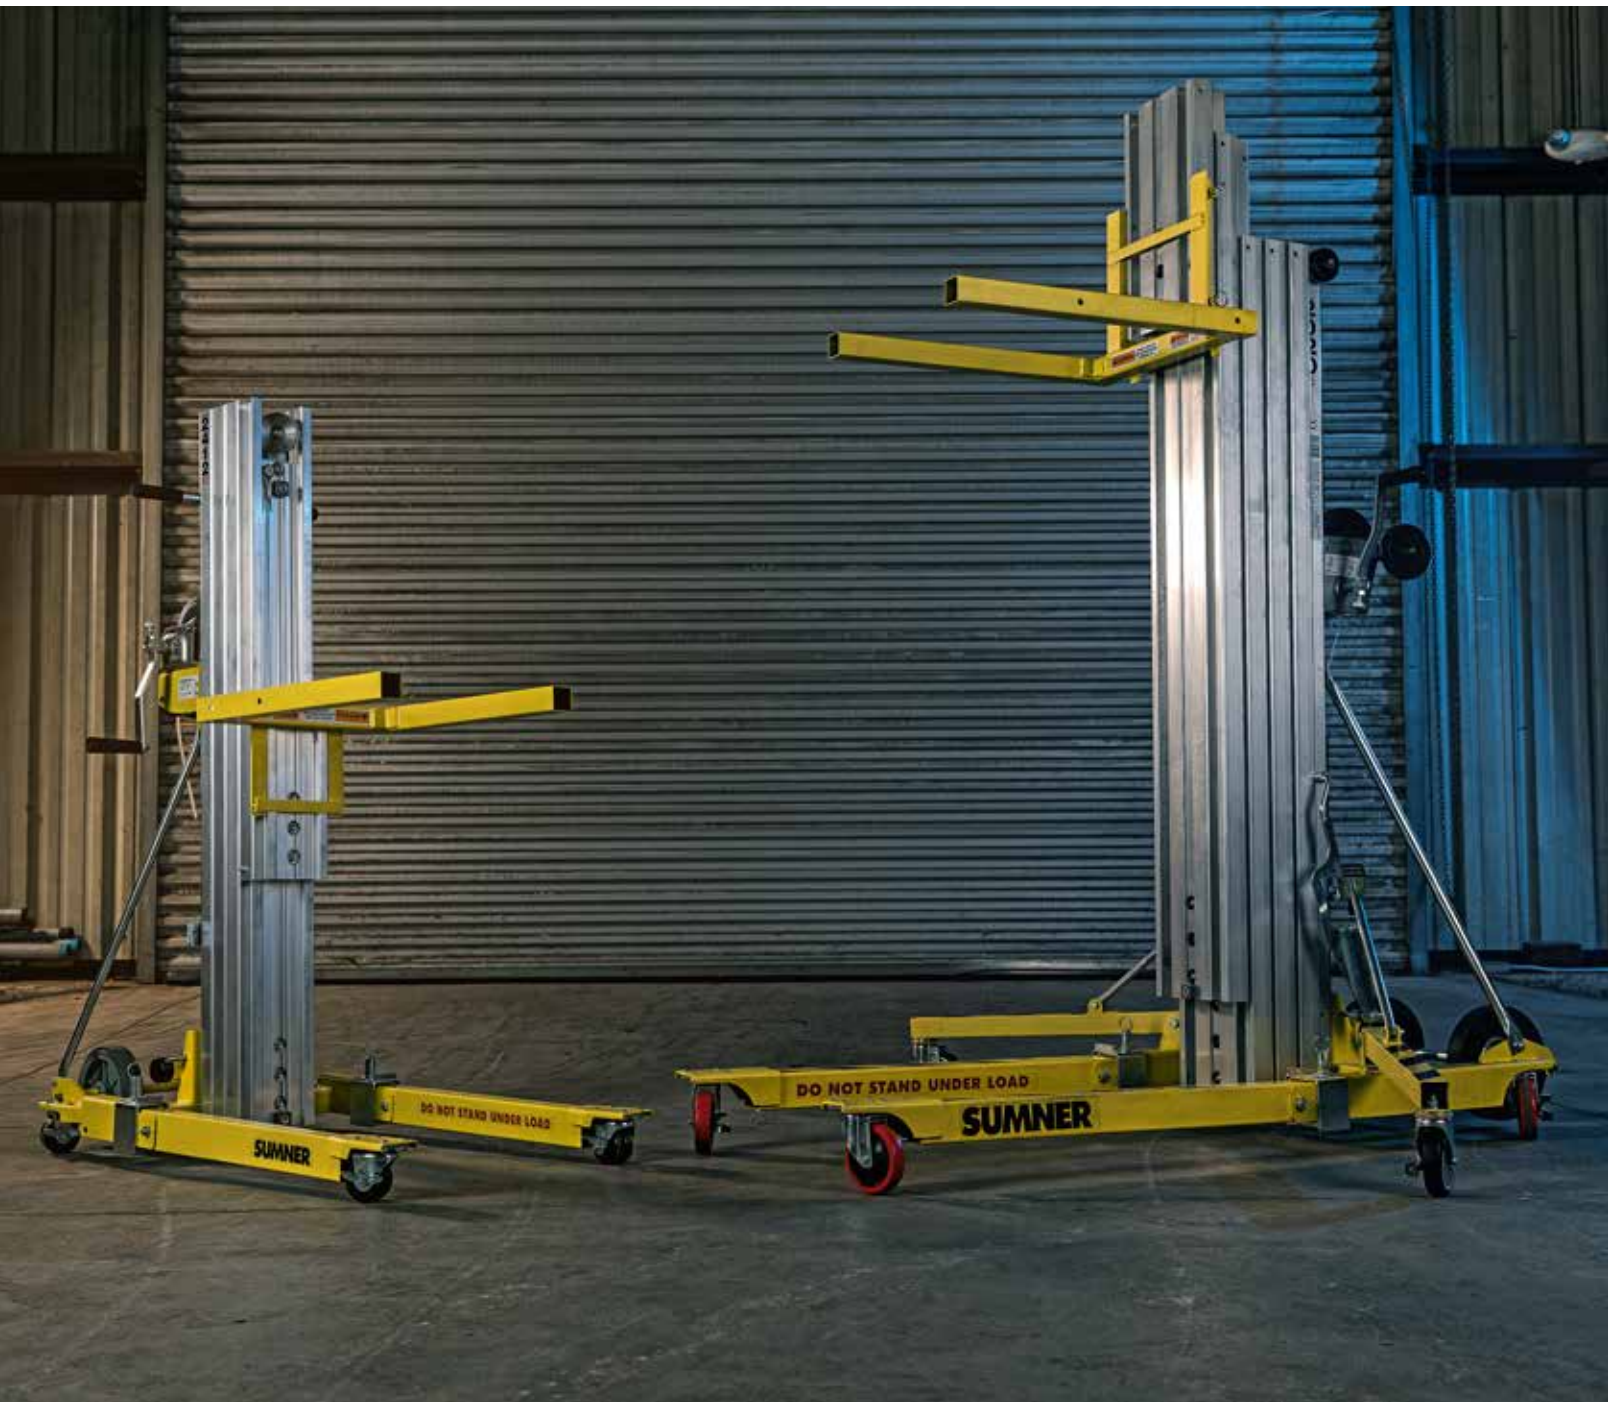

SERIES 1900



Special Features:

- 8' or 10' height (2.4 -3.05 m)
- 350 - 400 lbs. capacity
- Transportable
- Straddle Base - Standard
- 5" wheels to transport over rough terrain
- Two position winch handle for leverage
- Front swivel casters
- Quick action foot brake
- Reversible forks

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|------------------------------|
| 1908 | 782050 | Series 1908, 8' H, 400 lbs. |
| 1910 | 782051 | Series 1910, 10' H, 350 lbs. |



Series 1900 | MATERIAL LIFTS

MATERIAL LIFTS

SERIES 2000



This compact lift offers stronger mast design and a superior cabling system. The shorter mast sections allow the 2000 to travel through doorways without tipping and to fit nicely into vehicles with small storage space.

Special Features:

- 10', 15', 20' and 25' heights (3.5 m, 4.9 m, 6.3 m & 7.7 m)
- 650 - 1,000 lbs. maximum load capacity
- Rolls upright through doorways
- Loading Bar - great for overhead cranes
- Pulley Guards prevent cable from coming off
- Reversible forks
- Plunger pins for quick readjustment and compact storage
- No tools needed - no loose parts
- Variety of attachments
- Large 7/32" (5.5mm) load cable
- Load cable feeds inside mast (no more exposed cable just inches away from operator's face)

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------------------------|---------|---|
| 2010 | 783700 | 2010 Material Lift (10'/1000 lbs.) |
| 2015 | 783701 | 2015 Material Lift (15'/800 lbs.) |
| 2020 | 783702 | 2020 Material Lift (20'/800 lbs.) |
| 2025 | 783703 | 2025 Material Lift (25'/650 lbs.) |
| 2010G | 783223 | 2010 Material Lift (10'/1000 lbs.) - Galvanized |
| 2015G | 783224 | 2015 Material Lift (15'/800 lbs.) - Galvanized |
| 2020G | 783228 | 2020 Material Lift (20'/800 lbs.) - Galvanized |
| 2025G | 783229 | 2025 Material Lift (25'/650 lbs.) - Galvanized |
| Series 2000 Accessories | | |
| 783881 | 783881 | 10' Lift Cable stay brake |
| 783705 | 783705 | Pipe Cradle |
| 784070 | 784070 | Foot Jack |
| 783642 | 783642 | Boom Carriage |
| 786320 | 786320 | Tray |
| 783691 | 783691 | Fork Extensions |

SERIES 2100



The Series 2100 Lift features a taller mast to help reach desired work heights and requires few mast sections, making it less expensive and lighter. The base, forks and winch are the same as the Series 2000 Lift.

Special Features:

- 12', 18' and 24' heights (3.9 m, 5.6 m, & 7.2 m)
- 650 lbs. capacity
- Loading Bar - great for overhead cranes
- Pulley Guards prevent cable from coming off
- Reversible forks
- Plunger pins for quick readjustment and compact storage
- No tools needed - no loose parts
- Variety of attachments
- Large 7/32" (5.5mm) load cable
- Load cable feeds inside mast (no more exposed cable just inches away from operator's face)

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------------------------|---------|--|
| 2112 | 783650 | 2112 Contractor Lift (12'/650 lbs.) |
| 2118 | 783651 | 2118 Contractor Lift (18'/650 lbs.) |
| 2124 | 783652 | 2124 Contractor Lift (24'/650 lbs.) |
| 2112G | 783225 | 2112 Contractor Lift (12'/650 lbs.) - Galvanized |
| 2118G | 783226 | 2118 Contractor Lift (18'/650 lbs.) - Galvanized |
| 2124G | 783227 | 2124 Contractor Lift (24'/650 lbs.) - Galvanized |
| Series 2100 Accessories | | |
| 783881 | 783881 | 12' Lift Cable stay brake |
| 783705 | 783705 | Pipe Cradle |
| 784070 | 784070 | Foot Jack |
| 783642 | 783642 | Boom Carriage |
| 786320 | 786320 | Tray |
| 783691 | 783691 | Fork Extensions |
| 783765 | 783765 | Two Speed Winch Handle Kit |

MATERIAL LIFTS

SERIES 2200 LIL' HOISTER™



The 2200 Lil' Hoister™ lift is one of our most versatile lifts, useful for both industrial and business applications. We have designed it to be compact yet strong, transportable and able to handle bulky, heavy loads.

Special Features:

- Two speed winch handle allows the operator to raise and lower loads at standard speed or at high speed (less than half the time of standard)
- Mast braces for extra strength and support
- Reversible Forks
- Two plunger pins permit quick release of forks. Forks may be removed for storage or reversed for added height
- Double row casters
- Two 2" (5 cm) casters permit easy handling of heavy loads
- Compact storage
- Remove forks and reposition legs for space saving storage
- Fold-out roller wheels great for rolling lift in and out of vans and trucks
- Strap Feeds Away from the Operator – no more cable in the face.
- 1" nylon strap means no more cable kinks
- 8" non-marring wheels
- Dual I-beam mast design compact, light weight but strong
- Reversing handle for convenient, out of the way storage
- Legs extend for greater stability
- Plunger pin action allows quick adjustment

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------------|---------|-------------------------------------|
| 2208 | 784308 | 2208 Lil' Hoister™ (8' / 300 lbs.) |
| 2210 | 784310 | 2210 Lil' Hoister™ (10' / 300 lbs.) |
| Series 2200 Options | | |
| 784240 | 784240 | Aluminum Tray |
| 784218 | 784218 | Wheel Brake Kit |
| 784258 | 784258 | "Dually" Wheel Kit |

SERIES 2300



Drywall / HVAC Lift

Special Features:

- Solid, safe construction
- Lightweight - 99 lbs.
- Two speed winch handle
- Quick, tool-free assembly
- One person operation
- Tilts 65° for drywall installation
- Lifts loads of 150 lbs. up to 11' 2-3/4" (3.4 m) or 14' 9-3/4" (4.5 m)
- OPTIONAL HVAC/LIGHT CRADLE
- Great for duct and other lifting tasks that need a third hand!

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------------|---------|-----------------------------|
| 2311 | 784345 | 2311 Drywall Lift - 11' |
| 2311HVAC | 784330 | 2311 HVAC Cradle Lift - 11' |
| 2315 | 784346 | 2315 Drywall Lift - 15' |
| 2315HVAC | 784332 | 2315 HVAC Cradle Lift - 15' |
| Series 2300 Options | | |
| DWCRADLE | 784355 | Drywall Cradle Only |
| HVACCRADLE | 784474 | HVAC/Electrical Cradle Only |
| DWCART | 784510 | Drywall Lift Cart |



MATERIAL LIFTS

SERIES 2400

Contractor Lift

Special Features:

- Compact 12' (3.7 m) and 16' (4.9 m) lifts
- Lifting capacity up to 450 lbs.
- One piece construction - no loose pieces
- Extremely portable for one man operation
- Fits in most vans and SUVs
- 12' 11-3/4" (4.0 m) or 16' 11-38" (5.2 m) height when forks reversed
- Optional Cable Stay brake
- Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place in the event the cable should go slack



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------------|---------|--|
| 2412 | 784750 | 2412 Contractor Lift (12'/450 lbs.) |
| 2416 | 784751 | 2416 Contractor Lift (16'/450 lbs.) |
| 2412G | 784752 | 2412 Contractor Lift (12'/400 lbs.) - Galvanized |
| 2416G | 784753 | 2416 Contractor Lift (16'/400 lbs.) - Galvanized |
| Series 2400 Options | | |
| SBA2412 | 784755 | Safety Brake Kit 2412 |
| SBA2416 | 784756 | Safety Brake Kit 2416 |
| FEXTKIT2400 | 784695 | Fork Extension Install Kit |
| MHDBAR2412 | 784830 | Mast Hold-down, Bar Type 2412 |
| PCRADL2400 | 783705 | Pipe Cradle (pair) |
| STRAY2400 | 784320 | Steel Tray |

SERIES 2500

Counter Weight Lift

Special Features:

- No front legs to interfere with lifting
- Cart and mast section breakdown for ease of transportation
- 650 - 1,000 lbs. lifting capacity
- Great for hanging pipe against wall
- Four heights 10' - 25' (3 - 7 m)
- 2 speed winch

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------------|---------|-------------------------------|
| 2510G | 786510 | Series 2510 Lift - Galvanized |
| 2515G | 786511 | Series 2515 Lift - Galvanized |
| 2520G | 786512 | Series 2520 Lift - Galvanized |
| 2525G | 786513 | Series 2525 Lift - Galvanized |
| Series 2500 Options | | |
| 783705 | 783705 | Pipe Cradle (pair) |
| 786320 | 786320 | Steel Tray |
| 786645 | 786645 | Boom Assembly |
| 786750 | 786750 | Glass Boom Assembly |



MATERIAL LIFTS

SERIES 2600



783068

AXEL, The Big Lift

Special Features:

- 10 or 15 ft. (3 - 4.6 m)
- 1,100 lbs. capacity
- 2 speed winch
- Travels through doorways
- Legs fold for compact storage
- Rolls into vehicles
- Adjustable steering level handle

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|----------------------------|---------|--|
| 2610 | 783065 | 2610 The Big Lift, 10' 1100 lbs. |
| 2615 | 783067 | 2615 The Big Lift, 15' 1100 lbs. |
| 2610G | 783066 | 2610 The Big Lift, 10' 1100 lbs., Galvanized |
| 2615G | 783068 | 2615 The Big Lift, 15' 1100 lbs., Galvanized |
| Series 2600 Options | | |
| SBA2610/10 | 783882 | Safety Brake Assy for 2610 |
| SBA2615/15 | 783883 | Safety Brake Assy for 2615 |
| 783163 | 783163 | Fork Extensions |
| 784569 | 784569 | Pipe Cradle |

OPTIONS FOR SUMNER* LIFTS

| Lift Model | Available Options | |
|--|---|---|
| <p>EL-405 STACKER LIFT</p>  | <p>EL-405 Extension Strap Kit - PN 784685</p>  |  |
| <p>ROUST-A-BOUT R-SERIES</p>  | <p>R-100/150 Tee-Head Extension Bar - PN 781060 R-100/150 Tee-Head Extension Bar - PN 781061 R-100/150 Tee-Head Extension Bar - PN 781062</p>  | <p>Galvanized Finish - R-100G 780195 R-150G 780194 R-180G 780197 R-250G 780196</p>  |
| <p>SERIES 2000 MATERIAL LIFT</p>  | <p>Cable Stay Brake - PN 783881</p> | |
|  | <p>Pipe Cradle - PN 783705</p> | <p>Foot Jack - PN 784070</p>  |
|  | <p>Boom Carriage - PN 783642</p> | <p>Tray - PN 786320</p>  |
|  | <p>Fork Extensions - PN 783691</p> | |

OPTIONS FOR SUMNER* LIFTS

| OPTIONS FOR SUMNER* LIFTS | | |
|---|--|--|
| Lift Model | Available Options | |
| <p>SERIES 2100 CONTRACTOR LIFT</p>  | <p>Cable Stay Brake - PN 783663</p> | |
| | <p>Pipe Cradle - PN 783705</p>  | <p>Foot Jack - PN 784070</p>  |
| | <p>Boom Carriage - PN 783642</p>  | <p>Tray - PN 786320</p>  |
| | <p>Fork Extensions - PN 783691</p>  | <p>Two Speed Winch Handle Kit - PN 783765 (Factory Installed)</p>  |
| <p>SERIES 2200 LIL' HOISTER LIFT</p>  | <p>Aluminum Tray - PN 784240</p>  | |
| | <p>Wheel Brake Kit - PN 784218</p>  | |
| | <p>"Dually" Wheel Kit - PN 784258</p>  | |
| <p>SERIES 2300 DRYWALL / HVAC LIFT</p>  | <p>Drywall Lift Truck - PN 784510</p>    | |

OPTIONS FOR SUMNER* LIFTS

| Lift Model | Available Options | |
|---|---|--|
| SERIES 2400 CONTRACTOR LIFT  | Cable Stay Brake - PN 784755 | |
| | Pipe Cradle - PN 783705  | Tray - PN 784320  |
| | Fork Extensions - PN 784695  | |
| SERIES 2500 COUNTER WEIGHT LIFT  | Cable Stay Brake - PN 784755 | |
| | Pipe Cradle - PN 783705  | Tray - PN 784320  |
| | Boom Assembly - PN 786645  | Glass Boom Assembly- PN 786750  |
| SERIES 2600 "Axel" the Big Lift  | Safety Brakes - PN 783881 | |
| | Fork Extensions - PN 783163 | |
| | Pipe Cradle - PN 784569 | |

OPTIONS FOR SUMNER* LIFTS

GANTRIES

GH3/4 Gantry Series

GH2T Gantry Series

GH5T Gantry Series



GH3/4 GANTRY SERIES



3/4 Ton Gantry.

Special Features:

- Available in 8', 10', 12', 15', 3 m, 4 m and 5 m sizes
- 3/4 Metric Ton (1,650 lbs.) capacity
- Lightweight and portable
- Quick two-person assembly
- Adjustable Span
- Minimum pieces – 2 A-Frames with casters, Trolley, Cross Beam and attaching hardware
- Aluminum frames & beam
- 8" (200 mm) locking casters or 10" (250 mm) flat free double locking casters (GH3/4T Only)
- Unassisted height adjustment
- Pinch point free

**Chain hoist not included*

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|-----------------------------------|---------|--|
| GH3/4T-8x15 | 785301 | GH3/4T with 8" Caster & 15' Beam |
| GH3/4T-8x12 | 785303 | GH3/4T with 8" Caster & 12' Beam |
| GH3/4T-8x10 | 785305 | GH3/4T with 8" Caster & 10' Beam |
| GH3/4T-8x8 | 785307 | GH3/4T with 8" Caster & 8' Beam |
| GH3/4T-10x15 | 785300 | GH3/4T with 10" Double FF Tires & 15' Beam |
| GH3/4T-10x12 | 785302 | GH3/4T with 10" Double FF Tires & 12' Beam |
| GH3/4T-10x10 | 785304 | GH3/4T with 10" Double FF Tires & 10' Beam |
| GH3/4T-10x8 | 785306 | GH3/4T with 10" Double FF Tires & 8' Beam |
| 3/4 Ton Gantry Accessories | | |
| 3/4TBEAM15 | 785320 | GH3/4T 15' Beam |
| 3/4TBEAM12 | 785321 | GH3/4T 12' Beam |
| 3/4TBEAM10 | 785322 | GH3/4T 10' Beam |
| 3/4TBEAM8 | 785323 | GH3/4T 8' Beam |
| GH3/4TROL | 785600 | GH3/4T Trolley Assembly |

MATERIAL LIFTS

GH2T GANTRY SERIES



2 Ton Gantry.

Special Features:

- Available in 8', 10', 12', 15', 3 m, 4 m and 5 m sizes
- 2 metric ton (4,400 lbs.) capacity
- Lightweight and portable
- Quick two-person assembly
- Adjustable span
- Minimum pieces – 2 A-Frames with casters, trolley, cross beam and attaching hardware
- Aluminum frames and beam
- 8" locking casters
- Pinch point free

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------------------------------|---------|-----------------------|
| GH2T-15x15 | 785100 | GH2T-15 with 15' Beam |
| GH2T-12x12 | 785101 | GH2T-12 with 12' Beam |
| GH2T-10x10 | 785102 | GH2T-10 with 10' Beam |
| GH2T-8x8 | 785103 | GH2T-8 with 8' Beam |
| 2 Ton Gantry Accessories | | |
| 2TBEAM15 | 785073 | GH2T 15' Beam |
| 2TBEAM12 | 785074 | GH2T 12' Beam |
| 2TBEAM10 | 785075 | GH2T 10' Beam |
| 2TBEAM8 | 785076 | GH2T 8' Beam |
| GH2TROL | 785160 | GH2T Trolley Assembly |

GH5T GANTRY SERIES



5 Ton Gantry.

Special Features:

- All aluminum
- 5 metric ton / 11,000 lbs.
- Push button A-Frame leg lock and release
- Built in mast winch for height adjustment

**Chain hoist not included*

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|--------------------------------|---------|------------------------|
| GH2T-15x15 | 785805 | GH5T-15 with 15' Beam |
| GH2T-12x12 | 785806 | GH5T-12 with- 12' Beam |
| GH2T-10x10 | 785807 | GH5T-10 with 10' Beam |
| GH5T Gantry Accessories | | |
| 5TBEAM15 | 785815 | GH5T 15' Beam |
| 5TBEAM12 | 785816 | GH5T 12' Beam |
| 5TBEAM10 | 785817 | GH5T 10' Beam |
| GH5T Trolley | | |
| GH5TROL | 785895 | GH5T Trolley Assembly |

THEATRICAL LIFTS

Eventer™ Series



EVENTER™ SERIES

For lifting and supporting speakers, lights and stage equipment. The Eventer™ Series, specifically designed for the theatrical and entertainment industries, has proven to be a reliable lifting solution for flying light and speaker arrays in both indoor and outdoor venues. Available in 16' (4.9 m) 20' (6.4 m) and 25' (7.7 m) heights.



Special Features:

- Black, anodized aluminum telescoping masts fold out on the stage
- Sumner-built winch specifically designed for the application
- Compact - folds up for storage and transport
- Low mast heights fit through most doorways and truck tailgates
- Winch cable away from operator
- Forks reverse for added height
- Safety stripe markings on legs
- Large, rubber padded leveling jacks
- Robust quick-action plungers
- Lifting bar for hoisting the Eventer™

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---|---------|--------------------------------------|
| 784760 | 784760 | Eventer™ 16' |
| 783801 | 783801 | Eventer™ 20' |
| 783800 | 783800 | Eventer™ 25' |
| Eventer™ 16' Accessories | | |
| 784880 | 784880 | Eventer™ 16' boom (fully extended) |
| 784915 | 784915 | Eventer™ 16 hook block kit |
| 784055 | 784055 | Eventer™ 16 sound array bar |
| Eventer™ 20' and 25' Accessories | | |
| 783766 | 783766 | Eventer™ 20' and 25' hook block kit |
| 784060 | 784060 | Eventer™ 20' and 25' sound array bar |



CORDS

Royal® Premium Outdoor Extension Cords



ROYAL® PREMIUM OUTDOOR EXTENSION CORDS



Thermoset rubber jacketed cords have superior resistance to high temperature environments without losing the chemical and abrasion resistance. Harsh applications may include heavy industrial work, welding, and metal fabrication.

- Constructed from 1680D ballistic weave for durability
- 3 removable interior organization dividers with 6 pockets and 4 tool loops
- Convenient rotatable handle
- Flexible in a wide range of temperatures
- Royal® SJ00W jacket

SPECIFICATIONS

| PART# | WIRE GA/COND | WIRE TYPE | COLOR | 125V RATING | LENGTH |
|------------|--------------|-----------|--------|-------------|---------|
| 3677SW0008 | 12/3 | SJ00W | Black | 15A | 25 ft. |
| 3678SW0008 | 12/3 | SJ00W | Black | 15A | 50 ft. |
| 3679SW0008 | 12/3 | SJ00W | Black | 15A | 100 ft. |
| 3687SW0002 | 12/3 | SJ00W | Yellow | 15A | 25 ft. |
| 3688SW0002 | 12/3 | SJ00W | Yellow | 15A | 50 ft. |
| 3689SW0002 | 12/3 | SJ00W | Yellow | 15A | 100 ft. |

MATERIAL HANDLING

Pallet Jacks

6 Pac Mac™

10 Pac Mac™

Caddy Mac™ 1

Caddy Mac™ 2

Caddy Mac™ 3

Handi Mac™

Spool Mac™

Stor Mac™ 60

Stor Mac™ 48

Stor Mac™ 30

Tainer Mac™ 60

Tainer Mac™ 40

Tainer Mac™ 30

Kd Tainer Mac™ 60

Kdtainer Mac™ 45

Kdtainer Mac™ 30

Weldbox™ 3617

Weldbox™ 2812

Weldbox™ 2008

Bi-Fold Cabinet

Two Door Cabinet

Piano Boxes

Field Office

Compact Chest

Mini Compact Chest



PALLET JACKS



779765

The Sumner* low profile 27" pallet jack (Item # 779765) will handle the heavy lifting for you. The pallet jack's 2.5" low profile fork height allows for easy engagement of most pallets. A welded all-steel frame and tough powder coat finish provides maximum durability and protection. The Sumner* 20" Pallet Jack (Item # 779766) will handle the heavy lifting for you. The pallet jack's 2.5" low profile fork height allows for easy engagement of most pallets. A welded all-steel frame and tough powder coat finish provides maximum durability and protection.

Special Features:

- 6,000 lbs. weight capacity
- Three-function handle controls: Raising, lowering and neutral
- Minimum fork height: 2.5"
- Maximum lift height: 6.25"
- Pivot wheel size (x2): 6.25" diameter x 2.75" wide
- Fork width: 6"
- Outside fork width: 20.5"
- Fork length: 48"
- Turning radius: 180°



779766

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION |
|---------|---------|---------------------|
| 779765 | 779765 | 27"x48" Pallet Jack |
| 779766 | 779766 | 20"x48" Pallet Jack |

MATERIAL HANDLING

6 PAC MAC™ WIRE CART

PM06



Compact wire dispensing cart.

Special Features:

- Stores in one-third of the space of conventional dispensers
- Reel spindles fold and lock for convenient storage
- Fits through a 30" doorway
- Two 10" wheels with one 8" locking swivel caster for easy maneuverability
- Welded wire guides for easy payoff
- Stores up to (6) 2,500' spools (18" diameter) of wire
- Can be shipped via UPS

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|-----------------------|--------|---------|
| PM06 | 783350 | 6 PACK MAC™ Wire Cart | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| PM06 | 28.75" | 39.5" | 31.5" | 81 lbs. |

10 PAC MAC™ WIRE CART

PM10



Mobile wire dispensing cart.

Special Features:

- Handle/guide loop position controlled by plunger: 4-positions, no loose parts
- Spindles fold up and lock
- Mast swivels 360 degrees, but can be locked in fixed positions
- Mast may be removed for compact storage
- 4-heavy duty, locking 8" swivel casters
- Feed handle and guide loops are built into one part

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|------------------------|--------|----------|
| PM10 | 783366 | 10 PACK MAC™ Wire Cart | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| PM10 | 33" | 41" | 56.5" | 250 lbs. |

CADDY MAC™ #1 DOLLY

CM01



Transports spools on spindles and works as a dolly. Wire is dispensed while laying flat.

Special Features:

- 1/2" solid spindles are attached to cart
- No loose pieces. Spindles lock into place, even during transport.
- Spindles swing out to set position for convenient loading of wire spools
- Can be used with Handi Mac for extra storage

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------------|--------|---------|
| CM01 | 783398 | CADDY MAC™ #1 Dolly | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| CM01 | 20" | 26" | 49" | 50 lbs. |

CADDY MAC™ #2 DOLLY

CM02



CADDY MAC™ #2 dolly holds 16 spools of #10 AWG or 24 spools of #12 AWG.

Special Features:

- Spindles can be easily removed for the occasional use of larger spools
- Inner spindles store in special loops which can hold four pieces and will not fall out during transportation
- Hinge design allows easy access to all spools for wire dispensing and folds for compact storage

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------------|--------|---------|
| CM02 | 783395 | CADDY MAC™ #2 Dolly | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| CM02 | 14" | 26" | 49.5" | 63 lbs. |

MATERIAL HANDLING

CADDY MAC™ #3 DOLLY

CM03



CADDY MAC™ #3 dolly is a versatile wire cart that doubles as a dolly.

Special Features:

- Uses five 5/8" diameter spindles
- Unique spindle locking system, no loose clips
- Storage loops retain up to 5 spindles
- Dual wire guides
- Large spool capacity

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------------|--------|---------|
| CM03 | 783400 | CADDY MAC™ #3 Dolly | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| CM03 | 21.5" | 26.5" | 47.25" | 78 lbs. |

HANDI MAC™

HM-01



Wire dispenser.

Special Features:

- Provides extra spool storage for Caddy Mac™ 1 or as a free standing wire dispenser
- Holds up to 8 additional spools
- Spindles are made of sturdy 3/8" steel bar
- Also works with Caddy Mac™ 2

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------------------|--------|----------|
| HM-01 | 783490 | HANDI MAC™ Wire Dispenser | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| HM-01 | 22.5" | 12.5" | 10" | 7.5 lbs. |

SPOOL MAC™

SM-01



Wire payoff cart.

Special Features:

- All steel frame construction
- 10" wheels for easy transport over rough terrain
- Rollers on spool arm allow for smooth reel rotation and easy payoff
- No loose pieces to account for
- Folding design allows for compact storage
- Fits through 32" doorways
- 350 lbs. load capacity

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|-----------------|--------|---------|
| SM-01 | 783444 | SPOOL MAC™ Cart | | |
| LENGTH | WIDTH | HEIGHT | WEIGHT | |
| SM-01 | 16" | 31.5" | 63.5" | 80 lbs. |

MATERIAL HANDLING

STORE MAC™ 60

SM60



Security storage cabinet.

Special Features:

- Four 6" heavy duty casters (standard)
- For high visibility storage
- Reinforced frame and door
- Removable shelves
- Lockable doors
- Load capacity 1,500 lbs.

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|--------------|--------|----------|
| SM60 | 784920 | STOR MAC™ 60 | | |
| LENGTH | WIDTH | HEIGHT | WEIGHT | |
| SM60 | 33.75" | 63.5" | 58" | 345 lbs. |

STORE MAC™ 48

SM48



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|--------------|--------|----------|
| SM48 | 785921 | STOR MAC™ 48 | | |
| LENGTH | WIDTH | HEIGHT | WEIGHT | |
| SM48 | 33.75" | 51.5" | 58" | 310 lbs. |

STORE MAC™ 30

SM30



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|--------------|--------|----------|
| SM30 | 785920 | STOR MAC™ 30 | | |
| LENGTH | WIDTH | HEIGHT | WEIGHT | |
| SM30 | 33.75" | 31.5" | 58" | 210 lbs. |

TAINER MAC™ 60

TM60B



A mobile, heavy-duty stacking container.

Special Features:

- Transports 1,500 lbs. of material
- Large storage capacity
- Four 6" heavy-duty lockable casters
- Posts for stacking and steering
- Fits through 36" (91 cm) doorway
- Stacks with other Summer Stacking Macs

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|----------------|--------|----------|
| TM60B | 784990 | TAINER MAC™ 60 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| TM60B | 56" | 32" | 40" | 200 lbs. |

TAINER MAC™ 40

TM45B



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|----------------|--------|----------|
| TM45B | 784986 | TAINER MAC™ 40 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| TM45B | 45" | 30" | 37" | 190 lbs. |

TAINER MAC™ 30

TM30B



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|----------------|--------|----------|
| TM30B | 784988 | TAINER MAC™ 30 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| TM30B | 30" | 30" | 37" | 145 lbs. |

STORAGE BOXES

KD TAINER™ MAC 60

KM60



The knockdown version of Sumner's Tainer Mac™.

Special Features:

- Breaks down for easy storage
- Large storage capacity
- Four 6" heavy-duty lockable casters
- Posts for stacking and steering
- Fits through 36" (91 cm) doorway

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|-------------------|--------|----------|
| KM60 | 784987 | KD TAINER MAC™ 60 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| KM60 | 56" | 32" | 40" | 200 lbs. |

KD TAINER MAC™ 45

KM45



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|-------------------|--------|----------|
| KM45 | 784986 | KD TAINER MAC™ 45 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| KM45 | 45" | 30" | 37" | 190 lbs. |

KD TAINER MAC™ 30

KM30



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|-------------------|--------|----------|
| KM30 | 784985 | KD TAINER MAC™ 30 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| KM30 | 30" | 30" | 37" | 145 lbs. |

WELDBOX™ 3617

WB3617



The ideal storage chest for all welders and electricians.

Special Features:

- Two-point latching system requires only one lock
- Caster ready
- 16-gauge steel construction
- Powder-coat finish for superior durability and corrosion resistance

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------|--------|-----------|
| WB3617 | 779928 | WELDBOX™ 3617 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| WB3617 | 22.5" | 36" | 17" | 97.9 lbs. |

WELDBOX™ 2812

WB2812



Storage chest.

Special Features:

- 16-gauge steel construction
- Powder-coat finish for superior durability and corrosion resistance

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------|--------|-----------|
| WB2812 | 779911 | WELDBOX™ 2812 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| WB2812 | 11" | 28.375" | 12" | 30.8 lbs. |

WELDBOX™ 2008

WB2008



Tool storage chest.

Special Features:

- Powder-coat finish for superior durability and corrosion resistance

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|---------|---------|---------------|--------|-----------|
| WB2008 | 779910 | WELDBOX™ 2008 | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| WB2008 | 9.5" | 20.125" | 8.5" | 12.1 lbs. |

STORAGE BOXES

BI-FOLD CABINET

CB603065



Bi-Fold cabinet gives you unrestricted access to your tools with heavy duty shelves and a single locking point.

Special Features:

- Recessed lock housing for protection against theft with one-time lock installation
- Powder-coat finish for superior durability and corrosion resistance
- Heavy duty 16 gauge box construction
- Welded shelves
- Heavy duty hinges to resist break in
- Casters included

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|----------|---------|-----------------|--------|----------|
| CB603065 | 598227 | Bi-Fold Cabinet | | |
| LENGTH | WIDTH | HEIGHT | WEIGHT | |
| CB603065 | 14" | 120" | 65" | 470 lbs. |

TWO-DOOR CABINET

CB602460



Two door cabinet gives you two ways to store your tools. With heavy duty shelves and a large vertical storage area, you can easily organize and secure your tools.

Special Features:

- Recessed lock housing for protection against theft with none-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy duty 16 gauge box construction
- Welded shelves
- Heavy-duty hinges to resist break in
- Casters not included

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|----------|---------|------------------|--------|----------|
| CB602460 | 598228 | Two-Door Cabinet | | |
| LENGTH | WIDTH | HEIGHT | WEIGHT | |
| CB602460 | 24" | 60" | 60" | 385 lbs. |

PIANO BOX

PB603049



Piano boxes offer, at a glance, storage for both small and large tools, making it possible to organize and secure your livelihood, save time, and reduce costs on the jobsite.

Special Features:

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- Heavy-duty hinges to resist break in
- Casters not included
- 3 sizes available

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|----------|---------|-------------|-------|----------|
| PB603049 | 598224 | Piano Box | | |
| | | LENGTH | WIDTH | HEIGHT |
| PB603049 | 30" | 60" | 48.5" | 337 lbs. |

PIANO BOX

PB483048



SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|----------|---------|-------------|-------|----------|
| PB483048 | 598223 | Piano Box | | |
| | | LENGTH | WIDTH | HEIGHT |
| PB483048 | 20" | 48" | 48" | 287 lbs. |



STORAGE BOXES

PIANO BOX



PB603034



Piano Boxes offer, at a glance, storage for both small and large tools, making it possible to organize and secure your livelihood, save time, and reduce costs on the jobsite.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- Heavy-duty hinges to resist break in
- Casters not included

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | | |
|----------|---------|-------------|-------|--------|----------|
| PB603034 | 598222 | Piano Box | | | |
| | | LENGTH | WIDTH | HEIGHT | WEIGHT |
| PB603034 | | 30" | 60" | 34" | 282 lbs. |

FIELD OFFICE

FB604482



Field office offers a large workstation with shelved storage and a single locking point, allowing you to control and secure any jobsite.

Special Features:

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- Heavy-duty hinges to resist break in
- Casters not included

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | | |
|----------|---------|--------------|-------|--------|----------|
| F0604482 | 598225 | Field Office | | | |
| | | LENGTH | WIDTH | HEIGHT | WEIGHT |
| F0604482 | | 44" | 60" | 82" | 678 lbs. |

COMPACT CHEST

CC482423



Compact chest is a highly mobile storage vault. With the perfect profile for a truck bed and steel fork lift skids, this box will become your workhorse.

Special Features:

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- Heavy-duty hinges to resist break in
- Casters not included

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|----------|---------|---------------|--------|----------|
| CC482423 | 598226 | Compact Chest | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| CC482423 | 24" | 48" | 22.5" | 145 lbs. |

MINI COMPACT CHEST

CC191932



Mini compact chest is a highly mobile storage solution that stores easily in about any location.

Special Features:

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- Heavy-duty hinges to resist break in
- Casters not included

SPECIFICATIONS

| MODEL # | STOCK # | DESCRIPTION | | |
|----------|---------|--------------------|--------|---------|
| CC191932 | 630360 | Mini Compact Chest | | |
| | LENGTH | WIDTH | HEIGHT | WEIGHT |
| CC191932 | 32" | 19" | 19" | 73 lbs. |

SOUTHWIRE WARRANTY

WHAT DOES THIS WARRANTY COVER?

FIVE-YEAR LIMITED WARRANTY ON CONTRACTOR EQUIPMENT

Under Southwire's Contractor Equipment 5-Year Limited Warranty, Southwire Company, LLC warrants that all Southwire Contractor Equipment will be free from manufacturer defects for a period of five (5) years from the date of the original end user's purchase. However, electrical components and consumable parts such as ropes, blades, dies, draw studs, grips, are excluded from this 5-Year Limited Warranty and are subject to the One -Year warranty terms. Under this 5-Year Limited Warranty, the following are also excluded and Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Southwire Contractor Equipment products that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 5-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

THREE-YEAR LIMITED WARRANTY ON MATERIAL BOXES

Under Southwire's Material Boxes 3 -Year Limited Warranty, Southwire Company, LLC warrants that all Southwire Material Boxes will be free from manufacturer defects for a period of three (3) years from the date of the original end user's purchase. Under this Three-Year Limited Warranty for Material Boxes, the following are excluded and Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Material Boxes that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 3-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

ONE-YEAR LIMITED WARRANTY ON ELECTRICAL COMPONENTS AND CONSUMABLE PARTS (WITH 5-YEAR WARRANTY)

Under Southwire's 1-Year Limited Warranty, Southwire Company, LLC warrants that all electrical components and consumable parts such as ropes, blades, dies, draw studs, grips will be free from manufacturer defects for a period of one-year from the date of the original end user's purchase. Under this 1-Year Limited Warranty, Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Southwire electrical components and consumable parts that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 1-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

ONE-YEAR LIMITED WARRANTY (STAND ALONE)

Under Southwire's 1-Year Limited Warranty, Southwire Company, LLC warrants that this product will be free from manufacturer defects for a period of one-year from the date of the original end user's purchase. Under this 1-Year Limited Warranty, Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Southwire products that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 1-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

WARRANTY ON SOUTHWIRE ELECTRICIAN'S NON-ELECTRONIC HAND TOOLS

Southwire Company, LLC warrants this product to be free from defects in materials and workmanship for the life of the product. This warranty does not cover normal wear and tear resulting from product use, nor does it cover damage arising out of misuse, abuse, modification, and/or improper maintenance of the product. If the product breaches this warranty, Southwire will replace the product free of charge. If Southwire no longer manufactures the product, then it will, at its option, replace the nonconforming product with a substantially similar Southwire product or refund the purchase price. SOUTHWIRE MAKES NO WARRANTY THAT THE PRODUCT WILL BE MERCHANTABLE OR FIT FOR ANY PARTICULAR PURPOSE. SOUTHWIRE MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, OTHER THAN THE WARRANTY SPECIFICALLY SET FORTH HEREIN. SOUTHWIRE WILL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES FOR ANY BREACH OF THIS WARRANTY.

This warranty is void if this product is used for rental purposes. No product reseller is authorized to extend any other warranty on Southwire's behalf relating to this product, and no such reseller warranty will be binding on Southwire. If the product needs to be serviced, please contact the Customer Service Department at 855-SW.TOOLS (855-798-6657) to obtain a return authorization from Southwire. The sender is responsible for all shipping, freight, insurance, and packaging costs associated with sending a product to Southwire. Southwire will not be responsible for lost or damaged products returned for service or returned under this warranty.

All products returned to Southwire under this warranty should be mailed to:

Southwire Tools & Assembled Products Division
840 Old Bremen Road
Carrollton, GA 30117
Phone Number: 1.855.SW.TOOLS

SOUTHWIRE WARRANTY

Exclusion of Incidental, Consequential, Indirect, Special and Punitive Damages

SOUTHWIRE MAKES NO WARRANTY THAT SOUTHWIRE CONTRACTOR EQUIPMENT PRODUCTS WILL BE MERCHANTABLE OR FIT FOR ANY PARTICULAR PURPOSE. SOUTHWIRE MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, OTHER THAN THE RELEVANT WARRANTY SPECIFICALLY SET FORTH IN THIS WARRANTY SECTION. SOUTHWIRE WILL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES FOR ANY BREACH OF THIS LIMITED LIFETIME WARRANTY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Southwire Tools & Assembled Products Division
Attn: Product Returns
840 Old Bremen Road
Carrollton, GA 30117
Phone Number: 1.855.SW.TOOLS

WARRANTY CLAIM INFORMATION/HOW DO YOU GET SERVICE?

For all warranty, customer service, and product return authorizations and inquiries, please contact Southwire's Tools & Assembled Products at:

Southwire Tools & Assembled Products
Attention Product Returns
840 Old Bremen Road
Carrollton, GA, 30117
Phone Number: 1.855.SW.TOOLS

1. All warranty claims must be approved by Southwire's Tools & Assembled Products Warranty Department prior to return of product. If Southwire determines that a product is defective, Southwire will, at its option, repair or replace defective products or defective product components, free of charge.
2. Upon approval, Southwire will issue a Product Return Authorization Form which will include instructions on how and where to return the product. The product serial number and the original date of delivery must be set forth on the Product Return Authorization Form.
3. Southwire will cover standard freight charges (Courier Ground rate) incurred in connection with products that Southwire ultimately determines to be defective.
4. All defective components and defective products that Southwire replaces under these Warranties will become Southwire's property and will be retained by Southwire.

REPAIR YOUR PRODUCT WHEN IT IS OUT OF WARRANTY

Southwire is happy to provide information about where a purchaser can send a product for repair at consumers' own expense, please contact 1.855.SW.TOOLS or visit www.southwiretools.com/tools/home.do for more information about servicing for Southwire Products.

This warranty is void if this product is used for rental purposes. No product reseller is authorized to extend any other warranty on Southwire's behalf relating to this product, and no such reseller warranty will be binding on Southwire. If the product needs to be serviced, please contact the Customer Service Department at 855-SW.TOOLS (855-798-6657) to obtain a return authorization from Southwire. The sender is responsible for all shipping, freight, insurance, and packaging costs associated with sending a product to Southwire. Southwire will not be responsible for lost or damaged products returned for service or returned under this warranty. All products returned to Southwire under this warranty should be mailed to:

Southwire Tools & Assembled Products Division
840 Old Bremen Road
Carrollton, GA 30117
Phone Number: 1.855.SW.TOOLS

SUMNER WARRANTY

WHAT DOES THIS WARRANTY COVER?

LIMITED LIFETIME WARRANTY ON SUMNER EQUIPMENT

Under Sumner's Equipment Limited Lifetime Warranty, Sumner Manufacturing Co., LLC warrants that all Sumner Equipment will be free from manufacturer defects for a Limited Lifetime except for moving parts deemed consumables from the date of the original end user's purchase. Products deemed as consumable products, components and parts such as steel cables, rollers, bearings, wheels, lift mast sections components are excluded from this Limited Lifetime Warranty and are subject to One -Year Limited Warranty terms. Sumner electrical components are excluded from this Limited Lifetime Warranty and are subject to One -Year Limited Warranty terms. Under this Limited Lifetime Warranty, the following are also excluded, and Sumner will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Sumner's Equipment products that have been modified by any party other than Sumner or its authorized third-party designee. This Limited Lifetime Warranty is not transferrable to or enforceable by any person other than the product's original end user.

THREE-YEAR LIMITED WARRANTY ON PALLET JACKS AND HYDRAULIC TOOLS

Under Sumner's 3-Year Limited Warranty, Sumner Manufacturing Co., LLC warrants that all Sumner Pallet Jacks and Hydraulic Tools will be free from manufacturer defects for a period of three (3) years from the date of the original end user's purchase. Under this Three-Year Limited Warranty for Pallet Jacks and Hydraulic Tools, the following are excluded and Sumner Manufacturing Co., LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Pallet Jacks and Hydraulic Tools that have been modified by any party other than Sumner Manufacturing Co., LLC or its authorized third-party designee. This 3-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

ONE-YEAR LIMITED WARRANTY ON ALL PRODUCTS

Under Sumner's 1-Year Limited Warranty, Sumner Manufacturing Co., LLC warrants that all products will be free from manufacturer defects for a period of one-year from the date of the original end user's purchase. Under this 1-Year Limited Warranty, Sumner Manufacturing Co., LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Sumner Equipment that has been modified by any party other than Sumner Manufacturing Co., LLC or its authorized third-party designee. This 1-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

EXCLUSION OF INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL AND PUNITIVE DAMAGES

SUMNER MANUFACTURING CO. LLC MAKES NO WARRANTY THAT SUMNER MANUFACTURING CO. LLC PRODUCTS WILL BE MERCHANTABILITY OR FIT FOR ANY PARTICULAR PURPOSE. SUMNER MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, OTHER THAN THE RELEVANT WARRANTY SPECIFICALLY SET FORTH IN THIS WARRANTY SECTION. SOUTHWIRE WILL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES FOR ANY BREACH OF THIS LIMITED LIFETIME WARRANTY.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

SUMNER WARRANTY

WARRANTY CLAIM INFORMATION/HOW DO YOU GET SERVICE?

For all warranty, customer service, and product return authorizations and inquiries, please contact Sumner at:

Sumner Manufacturing Co., LLC
7514 Alabonson Road
Houston, Texas 77088
Phone Number: 1.281.999.6900

Sumner – Canada
75 Saltman Drive, Unit 5
Cambridge, Ontario N3H 4R7
Phone Number: 1.519.653.5300

Sumner – U.K.
Unit 3 Kepton Road
Keytec 7 Business Park
Pershore Worcestershire
WR10 2TA, UK
Phone Number: +44 (0) 1386 556278

Sumner – Netherlands
Handelsweg 26
3881LS Putten
The Netherlands
Phone Number: +31 (0) 85 489 0284


- 1.All warranty claims must be approved by Sumner's Warranty Department prior to return of product. If Sumner determines that a product is defective, Sumner will, at its option, repair or replace defective products or defective product components, free of charge.
- 2.Upon approval, Sumner will issue a Product Return Authorization Form which will include instructions on how and where to return the product. The product serial number and the original date of delivery must be set forth on the Product Return Authorization Form.
- 3.Sumner will cover standard freight charges (Courier Ground rate) incurred in connection with products that Sumner ultimately determines to be defective.
- 4.All defective components and defective products that Sumner replaces under these Warranties will become Sumner's property and will be retained by Sumner.

Repairing Your Product When it is Out of Warranty

Sumner is happy to provide information about where a purchaser can send a product for repair at consumers' own expense, please contact 1.281.999.6900 or visit www.sumner.com for more information about servicing for Sumner Products.



SUMNER*

 A Southwire Company

2019 PRODUCT CATALOG

GET SOCIAL WITH US:



[/SOUTHWIRETOOLS](#)
[/SOUTHWIRETOOLSLATINO](#)



[@SOUTHWIRETOOLS](#)



[@SOUTHWIRETOOLS](#)
[@SUMNERCO](#)



[SOUTHWIRETOOLS](#)

Sumner - U.S. | 281-999-6900

Sumner - Canada | (519) 653-5300

Sumner - U.K. | +44 (0) 1386 556278

Sumner - Netherlands | +31 (0) 85 489 0284