



# AUDIO & VIDEO KIT CATALOGUE

2017




 **VIDEX<sup>®</sup>**

THE POWER TO SECURE




# AUDIO & VIDEO KIT CATALOGUE

2017

**Audiokits** page 5 

Part number composition	page 6
Symbols legend	page 6
Glossary	page 6
Packaging guide	page 7

**Videokits** page 27 

Part number composition	page 28
Symbols legend	page 28
Glossary	page 28
Packaging guide	page 29

**Outdoor stations**

8000 Series	page 56
4000 Series	page 58
Smart, Mini and Slim Series	page 60

**Indoor stations**

6200, 6300, 6400 and 6700 Series	page 61
Kristallo® Series	page 62
3600 and 5000 Series	page 63



THE POWER TO SECURE



Founded in 1986, Videx designs and manufactures video/audio door entry systems and access controls, standing among the leading companies in the field worldwide.

The variety of the range, quality, service, and the continuity of a purely “Made in Italy” brand have been key factors for Videx Success through its 30 years history.

Our Company exports 95% of the production to more than 45 countries all over the world, offering unique solutions ranging from one or two way systems to complex systems with thousands of apartments.

Videx manufactures using only the highest quality components from a select number of well established Italian companies in order to guarantee the highest standards. Our quality control procedures ensure we deliver a first class product to our customers.

VIDEX have been UNI ISO 9001 certified since 2005.

VIDEX is socially and environmentally responsible, producing its own clean energy and using it to run its purpose build factory: two solar panel systems, accounting for 200Kw power, entirely fulfil its needs. Solar panels have been installed on the plant roof ensuring zero environmental impact.







# AUDIOKITS

<b>8000 SERIES</b>		PAGE
8K	STANDARD 3+1 AUDIO	8
8KC Digiphone	STANDARD 3+1 AUDIO DIGITAL CODELOCK	9
IK8K Interkit	STANDARD 4+1 AUDIO INTERCOMMUNICATING	10
<b>4000 SERIES</b>		
4K	STANDARD 3+1 AUDIO	11
4KC Digiphone	STANDARD 3+1 AUDIO CODELOCK UNIT	12
4KX Vproxphone	STANDARD 3+1 AUDIO PROXIMITY READER	13
GSM4K	GSM PROXIMITY READER	14
GSM4KC Digiphone	GSM PROXIMITY READER CODELOCK UNIT	15
LTGSM4K	GSM	16
LTGSM4KC Digiphone	GSM CODELOCK UNIT	17
GSMVRK	GSM VANDAL RESISTANT	18
GSMVRKC Digiphone	GSM VANDAL RESISTANT CODELOCK UNIT	19
VRK	STANDARD 4+1 AUDIO VANDAL RESISTANT	20
VRKC Digiphone	STANDARD 4+1 AUDIO VANDAL RESISTANT CODELOCK UNIT	21
<b>SMART, MINI &amp; SLIM SERIES</b>		
SMK Smart Kit	STANDARD 3+1 AUDIO	22
ESK Easy Kit	2 WIRE AUDIO	23
MK Mini Kit	STANDARD 4+1 AUDIO	24
SLK Slim Kit	STANDARD 3+1 AUDIO	25





# Part number composition

OUTDOOR STATION





AUDIOKIT	CALL BUTTONS AND MOUNTING	FRONT PLATE FINISH	SUPPORT FINISH
<b>8K</b>	<b>-1S</b>	<b>/A</b>	<b>/BL</b>
<p>8K 8KC IK8K 4K 4KC 4KX GSM4K GSM4KC LTGSM4K LTGSM4KC GSMVRK GSMVRKC VRK VRKC SMK ESK MK SLK</p>	<p>-1: One way, flush -1S: One way, surface -2: Two ways, flush -2S: Two ways, surface</p> <p><i>Flush option is not available for SLK audiokit</i></p> <p><i>-2 and -2S options are not available for ESK and SLK audiokits</i></p>	<p><b>8000 SERIES AUDIOKITS:</b> <i>none</i>: Aluminium <b>/BL</b>: Black</p> <p><b>4000 SERIES AUDIOKITS:</b> <i>none</i>: Mirror stainless steel <b>/A</b>: Aluminium</p> <p><b>8000 SERIES AUDIOKITS:</b> <i>none</i>: Mirror stainless steel <b>/A</b>: Aluminium <b>/G</b>: Gold <b>/HB</b>: PVD high brass</p>	<p><b>8000 SERIES AUDIOKITS:</b> <i>none</i>: Aluminium <b>/BL</b>: Black</p> <p><b>4000 SERIES AUDIOKITS:</b> <i>none</i>: Embossed metallized gun metal grey <b>/CR</b>: Silver Chromium plating <b>/G</b>: Gold Chromium plating</p> <p><b>SMART AND MINI SERIES AUDIOKITS:</b> <b>/A</b>: Aluminium <b>/G</b>: Gold <b>/W</b>: White</p>

## Symbols legend

### System connection

-  **STANDARD 3+1 AUDIO**
-  **STANDARD 4+1 AUDIO**
-  **GSM**
-  **2 WIRE AUDIO**

### Outdoor station features

-  **Vandal resistant**
-  **Proximity reader**
-  **Codelock unit**
-  **Intercommunicating**

## Glossary

<b>Busy LED</b>	Advise that the system is busy i.e. multiple entrance system
<b>Ring LED</b>	Advise that the call is in progress
<b>Speak LED</b>	Advise that the conversation has started
<b>Door open LED</b>	Advise that the door is open
<b>ON LED</b>	Advise that the videophone is switched ON
<b>Service button</b>	A button used to enable an additional service, may require an additional connection
<b>Privacy</b>	Service that allows to temporarily disable the call
<b>Intecommunicating call</b>	Service to start an intercommunication
<b>Camera recall</b>	Service to power up the system and see the camera in stand by
<b>Push to talk</b>	Service to enable the "push to talk" communication mode
<b>Push to exit</b>	Active low input that enables the integral relay

INDOOR STATION

INTERCOM  
MODEL

/3011

## Packaging guide

Colour explanation  
(depending on the kit version)

4K-1	4KC-1	4K-2
8K-1	8KC-1	8K-2
GSM4K	GSM4KC	
LTGSM4K	LTGSM4KC	
GSMVRK	GSMVRKC	



Outdoor station symbols explanation

4000 Series	4000 Series Vandal resistant	8000 Series
Speaker unit (1 module)	Speaker unit (1 modules)	Speaker unit (1 module)
Speaker unit plus access control (2 modules)	Speaker unit plus access control (2 modules)	Speaker unit plus access control (2 modules)

# 8K Audiokit

One way or two way



**STANDARD  
3+1 AUDIO**



	8K-1	8K-1S	8K-2	8K-2S
<b>CONNECTION</b>	STANDARD 3+1 AUDIO			
<b>OUTDOOR STATION</b>	8000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 8836M-1		1 x 8836M-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 8851	1 x 8881	1 x 8851	1 x 8881
<b>PROTECTIVE FRAME</b>	1 x 8861	—	1 x 8861	—
<b>RAINSHIELD OPT.<sup>1</sup></b>	8871	—	8871	—
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3011		2 x 3011	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	1: Door open			
<b>CONTROLS</b>	Call tone volume (3 Levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm		40x29.5x7cm	
<b>WEIGHT</b>	1.4Kg	1.8Kg	1.7Kg	2.2Kg



<sup>1</sup> To be ordered separately



# 8KC Digiphone Kit



One way or two way audiokit with codelock



**STANDARD  
3+1 AUDIO**



**Codelock  
unit**

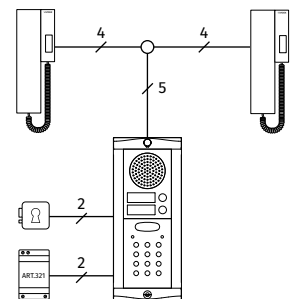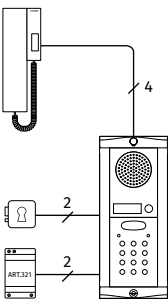

8KC-1S/A/BL

	8KC-1	8KC-1S	8KC-2	8KC-2S
<b>CONNECTION</b>	STANDARD 3+1 AUDIO			
<b>OUTDOOR STATION</b>	8000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 8836M-1		1 x 8836M-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 8800			
<b>CODES / RELAYS</b>	2 / 2			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 8852	1 x 8882	1 x 8852	1 x 8882
<b>PROTECTIVE FRAME</b>	1 x 8862	—	1 x 8862	—
<b>RAINSHIELD OPT.<sup>1</sup></b>	8872	—	8872	—
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3011		2 x 3011	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	1: Door open			
<b>CONTROLS</b>	Call tone volume (3 Levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm		40x29.5x7cm	
<b>WEIGHT</b>	2.1Kg	2.6Kg	2.8Kg	3.3Kg



<sup>1</sup> To be ordered separately

# IK8K Interkit

One way or two way intercommunicating audiokit



	IK8K-1	IK8K-1S	IK8K-2	IK8K-2S
<b>CONNECTION</b>	STANDARD 4+1 AUDIO			
<b>OUTDOOR STATION</b>	8000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 88361-1		1 x 88361-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 8851	1 x 8881	1 x 8851	1 x 8881
<b>PROTECTIVE FRAME</b>	1 x 8861	—	1 x 8861	—
<b>RAINSHIELD OPT.<sup>1</sup></b>	8871	—	8871	—
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	2 x 3002			
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	2: Door open, Service			
<b>CONTROLS</b>	Call tone volume (3 Levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm			
<b>WEIGHT</b>	2.1Kg	2.2Kg	2.1Kg	2.2Kg

**SPECIAL FEATURES**

<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
---------------------------	--

<sup>1</sup> To be ordered separately

# 4K Audiokit

One way or two way



4K-1S



	4K-1	4K-1S	4K-2	4K-2S
<b>CONNECTION</b>	STANDARD 3+1 AUDIO			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4836-1		1 x 4836-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>1</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3011		2 x 3011	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	1: Door open			
<b>CONTROLS</b>	Call tone volume (3 Levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm		40x29.5x7cm	
<b>WEIGHT</b>	2Kg	2.3Kg	2.3Kg	2.6Kg



<sup>1</sup> To be ordered separately

# 4KC Digiphone Kit



One way or two way audiokit with codelock



**STANDARD  
3+1 AUDIO**



**Codelock  
unit**

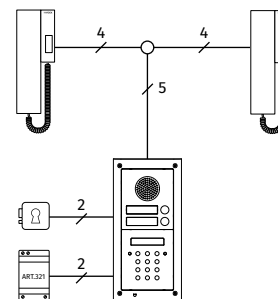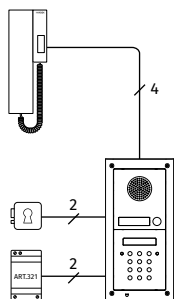

	4KC-1	4KC-1S	4KC-2	4KC-2S
<b>CONNECTION</b>	STANDARD 3+1 AUDIO			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4836-1		1 x 4836-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 4800M			
<b>CODES / RELAYS</b>	3 / 3			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>1</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3011		2 x 3011	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	1: Door open			
<b>CONTROLS</b>	Call tone volume (3 Levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm		40x29.5x7cm	
<b>WEIGHT</b>	2.4Kg	2.8Kg	2.7Kg	3.1Kg



<sup>1</sup> To be ordered separately

# 4KX Vproxphone Kit

One way or two way audiokit with proximity reader



**STANDARD  
3+1 AUDIO**



**Proximity  
reader**

4KX-1S



	4KX-1	4KX-1S	4KX-2	4KX-2S
<b>CONNECTION</b>	STANDARD 3+1 AUDIO			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4836-1		1 x 4836-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry			
<b>CALL</b>	Electronic Call Tone			
<b>PROXIMITY READER UNIT</b>	1 x 4850			
<b>KEYS / RELAYS</b>	Up to 100 / 1			
<b>LED</b>	Yes			
<b>RFID FREQUENCY</b>	125KHz			
<b>FOBS</b>	3 x 955/C card format		6 x 955/C card format	
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>1</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3011		2 x 3011	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	1: Door open			
<b>CONTROLS</b>	Call tone volume (3 Levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm		40x29.5x7cm	
<b>WEIGHT</b>	2.9Kg	3.3Kg	3.2Kg	3.6Kg

<sup>1</sup> To be ordered separately

# GSM4K PRO GSM Audiokit

One way or two way GSM audiokit with integrated proximity access control



GSM



Proximity reader



	GSM4K-1	GSM4K-1S	GSM4K-2	GSM4K-2S
<b>CONNECTION</b>	GSM 2G			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER AND PROXIMITY UNIT MODULE</b>	1 x 4810-1		1 x 4810-2	
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>KEYS / RELAYS</b>	Up to 1000 / 1			
<b>RFID FREQUENCY</b>	125KHz			
<b>Fobs</b>	3 x 955/T tag format			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>1</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>ANTENNA</b>	1 x 433			
<b>ACCESSORIES</b>	Connection cable, wall fix support			
<b>POWER SUPPLY UNIT</b>	1 x DR-15-12			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vdc / 1.25A			
<b>SIZE</b>	1.5 Module A Type DIN Box (25x93x56mm)			
<b>MOUNTING</b>	DIN bar			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29,5x7cm			
<b>WEIGHT</b>	1.2Kg	1.5Kg	1.2Kg	1.5Kg

## SPECIAL FEATURES

<b>CALL BUTTONS</b>	Up to 50
<b>TELEPHONE NUMBERS PER BUTTON</b>	4
<b>DIAL TO OPEN NUMBERS</b>	1000
<b>INTEGRATED PROXIMITY ACCESS</b>	Up to 1000 users
<b>VOICE ANNUNCIATION</b>	Yes
<b>CALL PROGRESS LED'S</b>	Yes, 4
<b>PROGRAMMING</b>	SMS/USB
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>AUXILIARY INPUT</b>	Yes, 2
<b>AUXILIARY OPEN COLLECTOR OUTPUTS</b>	Yes, 2
<b>LOCK OUTPUT</b>	Dry contact relay
<b>INPUT VOLTAGE</b>	12-24V ac/dc
<b>EVENT LOG</b>	Yes, 4000 events
<b>BOOTLOADER</b>	Yes
<b>INTERFACES</b>	RS-485, Micro-USB
<b>TIMEBANDS</b>	Yes, 1

<sup>1</sup> To be ordered separately

# GSM4KC PRO GSM Digiphone Kit

One way or two way GSM audiokit with integrated proximity access control and codelock



GSM



Proximity reader



Codelock unit

GSM4KC-1S/A



	GSM4KC-1	GSM4KC-1S	GSM4KC-2	GSM4KC-2S
<b>CONNECTION</b>	GSM 2G			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER AND PROXIMITY UNIT MODULE</b>	1 x 4810-1		1 x 4810-2	
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>KEYS / RELAYS</b>	Up to 1000 / 1			
<b>RFID FREQUENCY</b>	125KHz			
<b>CODELOCK UNIT</b>	1 x 4800M			
<b>CODES / RELAYS</b>	3 / 3			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>1</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>ANTENNA</b>	1 x 433			
<b>ACCESSORIES</b>	Connection cable, wall fix support			
<b>POWER SUPPLY UNIT</b>	1 x DR-15-12			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vdc / 1.25A			
<b>SIZE</b>	1.5 Module A Type DIN Box (25x93x56mm)			
<b>MOUNTING</b>	DIN bar			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm			
<b>WEIGHT</b>	1.6Kg	2Kg	1.6Kg	2Kg

## SPECIAL FEATURES

<b>CALL BUTTONS</b>	Up to 50
<b>TELEPHONE NUMBERS PER BUTTON</b>	4
<b>DIAL TO OPEN NUMBERS</b>	1000
<b>INTEGRATED PROXIMITY ACCESS</b>	Up to 1000 users
<b>VOICE ANNUNCIATION</b>	Yes
<b>CALL PROGRESS LED'S</b>	Yes, 4
<b>PROGRAMMING</b>	SMS/USB
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>AUXILIARY INPUT</b>	Yes, 2
<b>AUXILIARY OPEN COLLECTOR OUTPUTS</b>	Yes, 2
<b>LOCK OUTPUT</b>	Dry contact relay
<b>INPUT VOLTAGE</b>	12-24V ac/dc
<b>EVENT LOG</b>	Yes, 4000 events
<b>BOOTLOADER</b>	Yes
<b>INTERFACES</b>	RS-485, Micro-USB
<b>TIMEBANDS</b>	Yes, 1

<sup>1</sup> To be ordered separately

# LTGSM4K LITE GSM Audiokit

One way or two way GSM audiokit



	LTGSM4K-1	LTGSM4K-1S	LTGSM4K-2	LTGSM4K-2S
<b>CONNECTION</b>	GSM 2G			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4811-1		1 x 4811-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>1</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>ANTENNA</b>	1 x 433			
<b>ACCESSORIES</b>	Connection cable, wall fix support			
<b>POWER SUPPLY UNIT</b>	1 x DR-15-12			
<b>INPUT/OUTPUT/A</b>	230Vac / 12Vdc / 1.25A			
<b>SIZE</b>	1.5 Module A Type DIN Box (25x93x56mm)			
<b>MOUNTING</b>	DIN bar			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm			
<b>WEIGHT</b>	1.1Kg	1.1Kg	1.4Kg	1.4Kg

### SPECIAL FEATURES

<b>CALL BUTTONS</b>	Up to 4
<b>TELEPHONE NUMBERS PER BUTTON</b>	2
<b>DIAL TO OPEN NUMBERS</b>	100
<b>INTEGRATED PROXIMITY ACCESS</b>	None
<b>VOICE ANNUNCIATION</b>	None
<b>CALL PROGRESS LED'S</b>	None
<b>PROGRAMMING</b>	SMS
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>AUXILIARY INPUT</b>	Yes, 2
<b>AUXILIARY OPEN COLLECTOR OUTPUTS</b>	Yes, 1
<b>LOCK OUTPUT</b>	Dry contact relay
<b>INPUT VOLTAGE</b>	12-24V ac/dc
<b>EVENT LOG</b>	None
<b>BOOTLOADER</b>	None
<b>INTERFACES</b>	None
<b>TIMEBANDS</b>	None

<sup>1</sup> To be ordered separately



# LTGSM4KC LITE GSM Digiphone Kit

One way or two way GSM audiokit with codelock



LTGSM4KC-1S/A



	LTGSM4KC-1	LTGSM4KC-1S	LTGSM4KC-2	LTGSM4KC-2S
<b>CONNECTION</b>	GSM 2G			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4811-1		1 x 4811-2	
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 4800M			
<b>CODES / RELAYS</b>	3 / 3			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>1</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>ANTENNA</b>	1 x 433			
<b>ACCESSORIES</b>	Connection cable, wall fix support			
<b>POWER SUPPLY UNIT</b>	1 x DR-15-12			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vdc / 1.25A			
<b>SIZE</b>	1.5 Module A Type DIN Box (25x93x56mm)			
<b>MOUNTING</b>	DIN bar			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm			
<b>WEIGHT</b>	1.5Kg	1.5Kg	1.9Kg	1.9Kg

**SPECIAL FEATURES**

<b>CALL BUTTONS</b>	Up to 4
<b>TELEPHONE NUMBERS PER BUTTON</b>	2
<b>DIAL TO OPEN NUMBERS</b>	100
<b>INTEGRATED PROXIMITY ACCESS</b>	None
<b>VOICE ANNUNCIATION</b>	None
<b>CALL PROGRESS LED'S</b>	None
<b>PROGRAMMING</b>	SMS
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>AUXILIARY INPUT</b>	Yes, 2
<b>AUXILIARY OPEN COLLECTOR OUTPUTS</b>	Yes, 1
<b>LOCK OUTPUT</b>	Dry contact relay
<b>INPUT VOLTAGE</b>	12-24V ac/dc
<b>EVENT LOG</b>	None
<b>BOOTLOADER</b>	None
<b>INTERFACES</b>	None
<b>TIMEBANDS</b>	None

<sup>1</sup> To be ordered separately

# GSMVRK GSM VR Audiokit

One way or two way  
GSM vandal resistant audiokit



	GSMVRK-1	GSMVRK-1S	GSMVRK-2	GSMVRK-2S
<b>CONNECTION</b>	GSM 2G			
<b>OUTDOOR STATION</b>	4000 Series Vandal Resistant			
<b>SPEAKER UNIT MODULE</b>	1 x VR4KGSM-1		1 x VR4KGSM-2	
<b>LEDs</b>	3: Speak, Busy, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>1</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>ANTENNA</b>	1 x 433			
<b>ACCESSORIES</b>	Connection cable, wall fix support			
<b>POWER SUPPLY UNIT</b>	1 x DR-15-12			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vdc / 1.25A			
<b>SIZE</b>	1.5 Module A Type DIN Box (25x93x56mm)			
<b>MOUNTING</b>	DIN bar			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm			
<b>WEIGHT</b>	1.3Kg	1.6Kg	1.3Kg	1.6Kg

## SPECIAL FEATURES

<b>CALL BUTTONS</b>	Up to 24
<b>TELEPHONE NUMBERS PER BUTTON</b>	4
<b>DIAL TO OPEN NUMBERS</b>	1000
<b>INTEGRATED PROXIMITY ACCESS</b>	None
<b>VOICE ANNUNCIATION</b>	None
<b>CALL PROGRESS LED'S</b>	Yes
<b>PROGRAMMING</b>	SMS/USB
<b>PUSH TO EXIT INPUT</b>	Yes
<b>AUXILIARY INPUT</b>	Yes, 1
<b>AUXILIARY OPEN COLLECTOR OUTPUTS</b>	Yes, 1
<b>LOCK OUTPUT</b>	Dry contact relay
<b>INPUT VOLTAGE</b>	12Vdc
<b>EVENT LOG</b>	Yes, 4000 events
<b>BOOTLOADER</b>	Yes
<b>INTERFACES</b>	Micro-USB
<b>TIMEBANDS</b>	Yes, 1

<sup>1</sup> To be ordered separately

# GSMVRKC GSM VR Digiphone Kit

One way or two way  
GSM vandal resistant audiokit  
with codelock



GSMVRKC-1S



	GSMVRKC-1	GSMVRKC-1S	GSMVRKC-2	GSMVRKC-2S
<b>CONNECTION</b>	GSM 2G			
<b>OUTDOOR STATION</b>	4000 Series Vandal Resistant			
<b>SPEAKER UNIT MODULE</b>	1 x VR4KGSM-1		1 x VR4KGSM-2	
<b>LEDs</b>	3: Speak, Busy, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x VR4KCLM-1			
<b>CODES / RELAYS</b>	2 / 2			
<b>ILLUMINATION</b>	No			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>1</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>ANTENNA</b>	1 x 433			
<b>ACCESSORIES</b>	Connection cable, wall fix support			
<b>POWER SUPPLY UNIT</b>	1 x DR-15-12			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vdc / 1.25A			
<b>SIZE</b>	1.5 Module A Type DIN Box (25x93x56mm)			
<b>MOUNTING</b>	DIN bar			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29,5x7cm			
<b>WEIGHT</b>	2Kg	2.3Kg	2Kg	2.3Kg

**SPECIAL FEATURES**

<b>CALL BUTTONS</b>	Up to 24
<b>TELEPHONE NUMBERS PER BUTTON</b>	4
<b>DIAL TO OPEN NUMBERS</b>	1000
<b>INTEGRATED PROXIMITY ACCESS</b>	None
<b>VOICE ANNUNCIATION</b>	None
<b>CALL PROGRESS LED'S</b>	Yes
<b>PROGRAMMING</b>	SMS/USB
<b>PUSH TO EXIT INPUT</b>	Yes
<b>AUXILIARY INPUT</b>	Yes, 1
<b>AUXILIARY OPEN COLLECTOR OUTPUTS</b>	Yes, 1
<b>LOCK OUTPUT</b>	Dry contact relay
<b>INPUT VOLTAGE</b>	12Vdc
<b>EVENT LOG</b>	Yes, 4000 events
<b>BOOTLOADER</b>	Yes
<b>INTERFACES</b>	Micro-USB
<b>TIMEBANDS</b>	Yes, 1

<sup>1</sup> To be ordered separately

# VRK Audiokit




One way or two way  
vandal resistant audiokit



**STANDARD  
4+1 AUDIO**



**Vandal  
resistant**

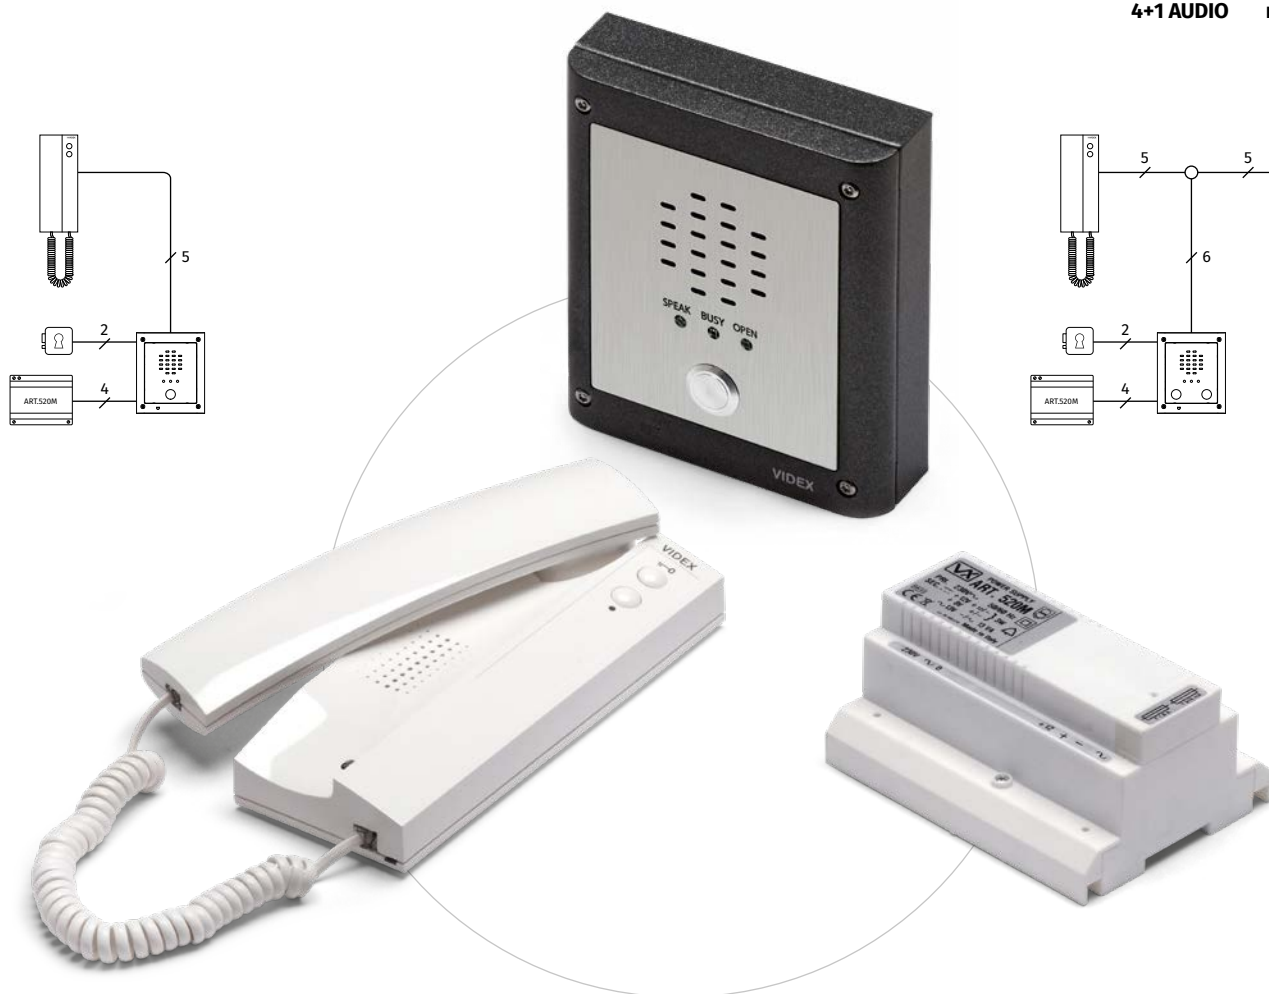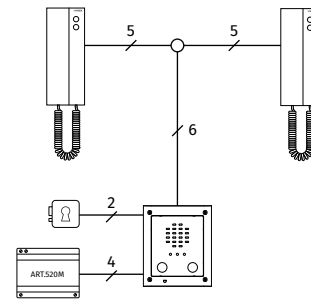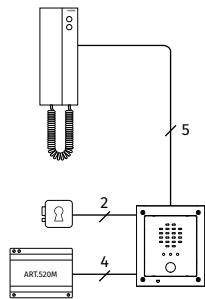

	VRK-1	VRK-1S	VRK-2	VRK-2S
<b>CONNECTION</b>	STANDARD 4+1 AUDIO			
<b>OUTDOOR STATION</b>	4000 Series Vandal Resistant			
<b>SPEAKER UNIT MODULE</b>	1 x VR4KAM-1		1 x VR4KAM-2	
<b>LEDs</b>	3: Speak, Busy, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>1</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3111		2 x 3111	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	2: Door open, Service			
<b>CONTROLS</b>	Call tone volume (3 levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 520M			
<b>INPUT/OUTPUTS/VA</b>	230Vac / 12Vdc - 8Vdc - 13Vac / 13VA			
<b>SIZE</b>	8 Modules A Type DIN Box (140x65x105mmmm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm			
<b>WEIGHT</b>	2.1Kg	2.4Kg	2.4Kg	2.8Kg

<sup>1</sup> To be ordered separately

# VRKC Digiphone Kit

One way or two way  
vandal resistant audiokit  
with codelock



**STANDARD  
4+1 AUDIO**



**Vandal  
resistant**



**Codelock  
unit**

VRKC-1S




	VRKC-1	VRKC-1S	VRKC-2	VRKC-2S
<b>CONNECTION</b>	STANDARD 4+1 AUDIO			
<b>OUTDOOR STATION</b>	4000 Series Vandal Resistant			
<b>SPEAKER UNIT MODULE</b>	1 x VR4KAM-1		1 x VR4KAM-2	
<b>LEDS</b>	3: Speak, Busy, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x VR4KCLM-1			
<b>CODES / RELAYS</b>	2 / 2			
<b>ILLUMINATION</b>	No			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>1</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>INDOOR STATION</b>	1 x 3111		2 x 3111	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	2: Door open, Service			
<b>CONTROLS</b>	Call tone volume (3 levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 520M			
<b>INPUT/OUTPUTS/VA</b>	230Vac / 12Vdc - 8Vdc - 13Vac / 13VA			
<b>SIZE</b>	8 Modules A Type DIN Box (140x65x105mmmm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	40x29,5x7cm			
<b>WEIGHT</b>	3Kg	3.5Kg	3.3Kg	3.8Kg

<sup>1</sup> To be ordered separately

# SMK SMART Audiokit

One way or two way

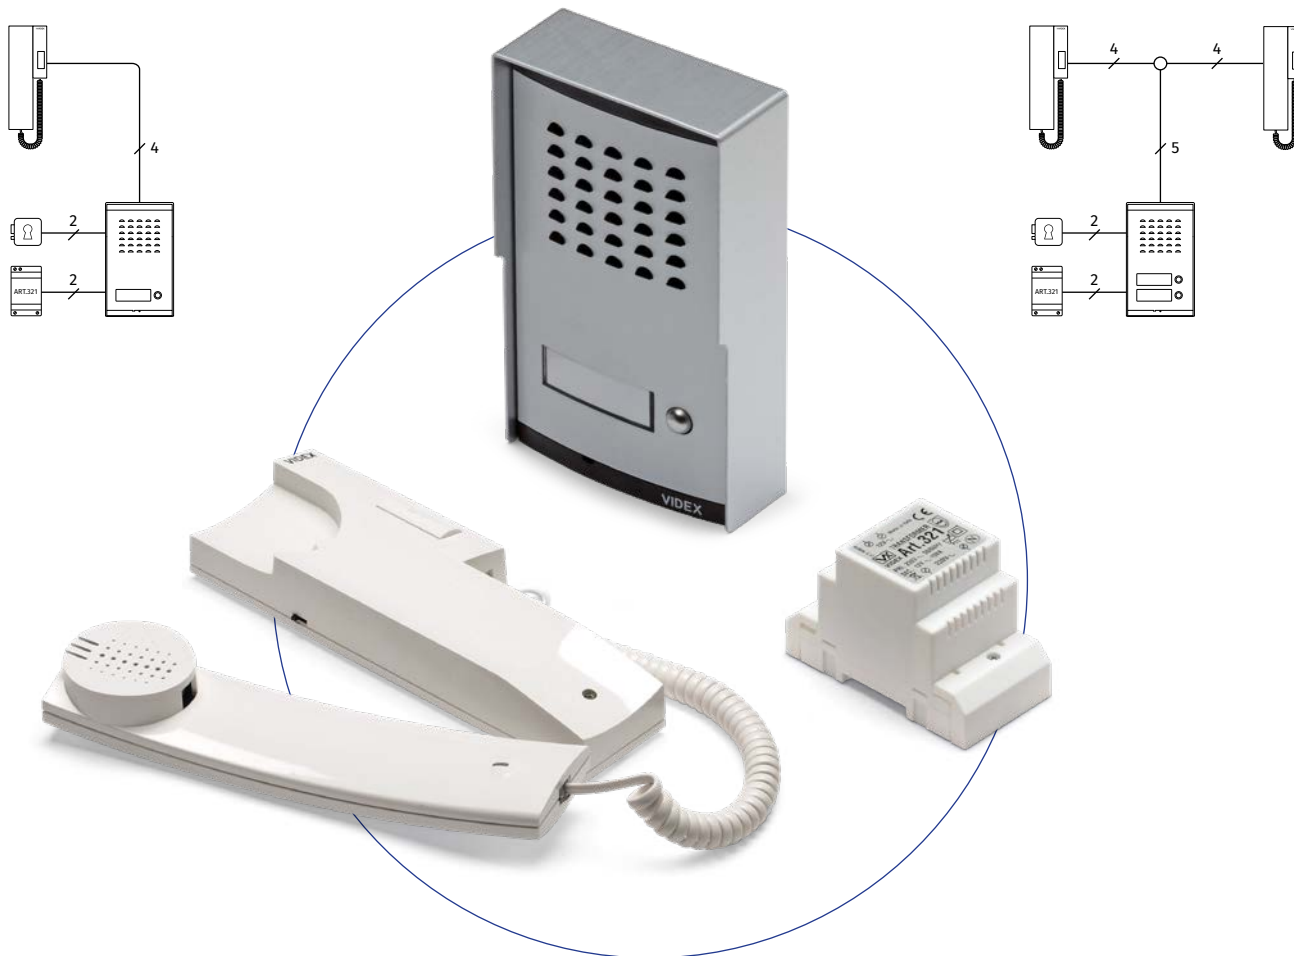

	SMK-1	SMK-1S	SMK-2	SMK-2S
<b>CONNECTION</b>	STANDARD 3+1 AUDIO			
<b>OUTDOOR STATION</b>	SMART Series			
<b>SPEAKER UNIT</b>	1 x 336E-1	1 x 336E-1S	1 x 336E-2	1 x 336E-2S
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>COVERING FRAME OPT.<sup>1</sup></b>	371	—	371	—
<b>SURFACE MOUNTING BOX OPT.<sup>1</sup></b>	381	—	381	—
<b>INDOOR STATION</b>	1 x 3011		2 x 3011	
<b>SERIES</b>	3000 Series Smart Range			
<b>CALL</b>	Electronic Call Tone			
<b>BUTTONS</b>	1: Door open			
<b>CONTROLS</b>	Call tone volume (3 levels)			
<b>MOUNTING</b>	Surface			
<b>POWER SUPPLY UNIT</b>	1 x 321			
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA			
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	29x29.5x7cm		40x29.5x7cm	
<b>WEIGHT</b>	1.3Kg	1.5Kg	1.7Kg	1.9Kg




<sup>1</sup> To be ordered separately

# ESK EASY TWO WIRE Audiokit

One way only



ESK-1S/A

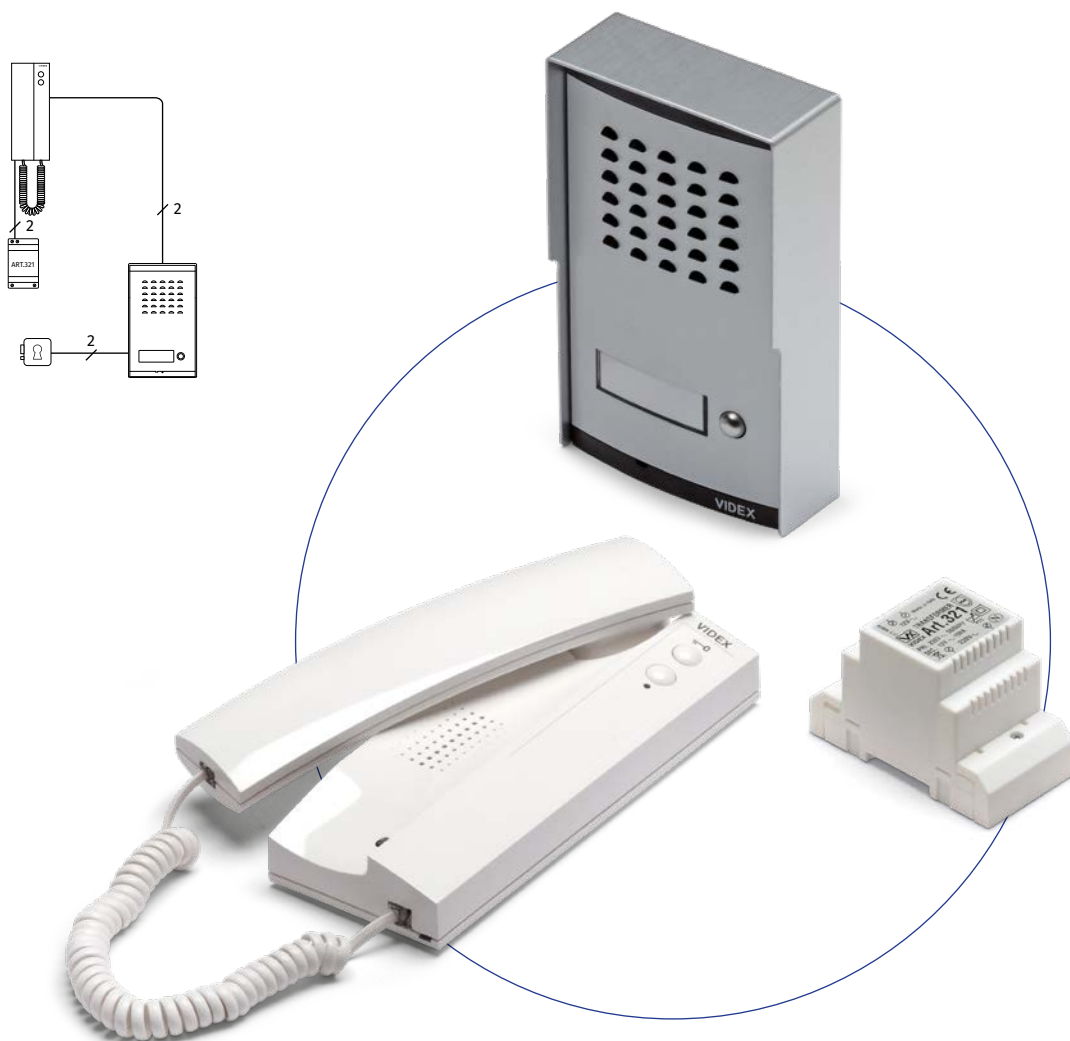




	ESK-1	ESK-1S
<b>CONNECTION</b>	2 WIRE AUDIO	
<b>OUTDOOR STATION</b>	SMART Series	
<b>SPEAKER UNIT</b>	1 x 332	1 x 332S
<b>CALL BUTTONS</b>	1	
<b>DOOR OPENING</b>	Built-in Lock Relay	
<b>CALL</b>	Electronic Call Tone	
<b>MOUNTING</b>	Flush	Surface
<b>COVERING FRAME OPT.<sup>1</sup></b>	371	—
<b>SURFACE MOUNTING BOX OPT.<sup>1</sup></b>	381	—
<b>INDOOR STATION</b>	1 x 3151	
<b>SERIES</b>	3000 Series Smart Range	
<b>CALL</b>	Electronic Call Tone	
<b>BUTTONS</b>	2: Door open, Service	
<b>CONTROLS</b>	Call tone volume (3 levels)	
<b>MOUNTING</b>	Surface	
<b>POWER SUPPLY UNIT</b>	1 x 321	
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA	
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)	
<b>MOUNTING</b>	DIN bar or direct wall fixing	
<b>PACKAGING</b>	Giftbox	
<b>SIZE</b>	29x29.5x7cm	
<b>WEIGHT</b>	1.3Kg	1.5Kg



<sup>1</sup> To be ordered separately

# MK MINI Audiokit

One way or two way

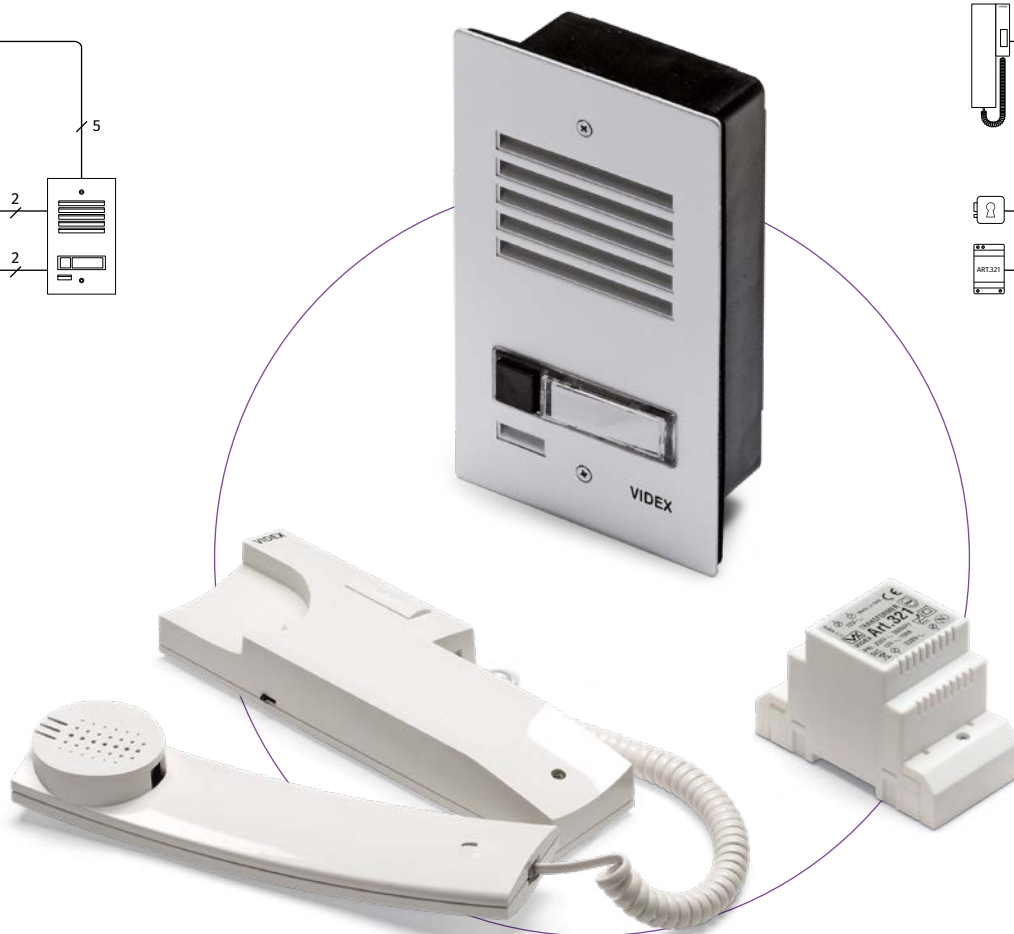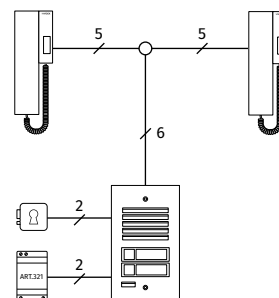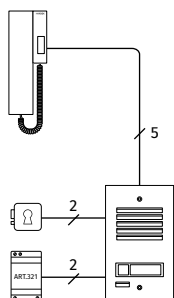

	MK-1	MK-2
<b>CONNECTION</b>	STANDARD 4+1 AUDIO	
<b>OUTDOOR STATION</b>	Mini Series	
<b>SPEAKER UNIT</b>	1 x DU-1A	1 x DU-2A
<b>CALL BUTTONS</b>	1	2
<b>DOOR OPENING</b>	Built-in Lock Relay	
<b>CALL</b>	Electronic Call Tone	
<b>MOUNTING</b>	Flush Surface (require <b>SMB-M</b> <sup>1</sup> )	
<b>INDOOR STATION</b>	1 x 3021	2 x 3021
<b>SERIES</b>	3000 Series Smart Range	
<b>CALL</b>	Electronic Call Tone	
<b>BUTTONS</b>	1: Door open	
<b>CONTROLS</b>	Call tone volume (3 levels)	
<b>MOUNTING</b>	Surface	
<b>POWER SUPPLY UNIT</b>	1 x 321	
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA	
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)	
<b>MOUNTING</b>	DIN bar or direct wall fixing	
<b>PACKAGING</b>	Giftbox	
<b>SIZE</b>	25.5x23.5x6.5cm	29x29.5x7cm
<b>WEIGHT</b>	1.3Kg	1.6Kg



<sup>1</sup> To be ordered separately





# SLK SLIM Audiokit

One way only



STANDARD  
3+1 AUDIO

SLK

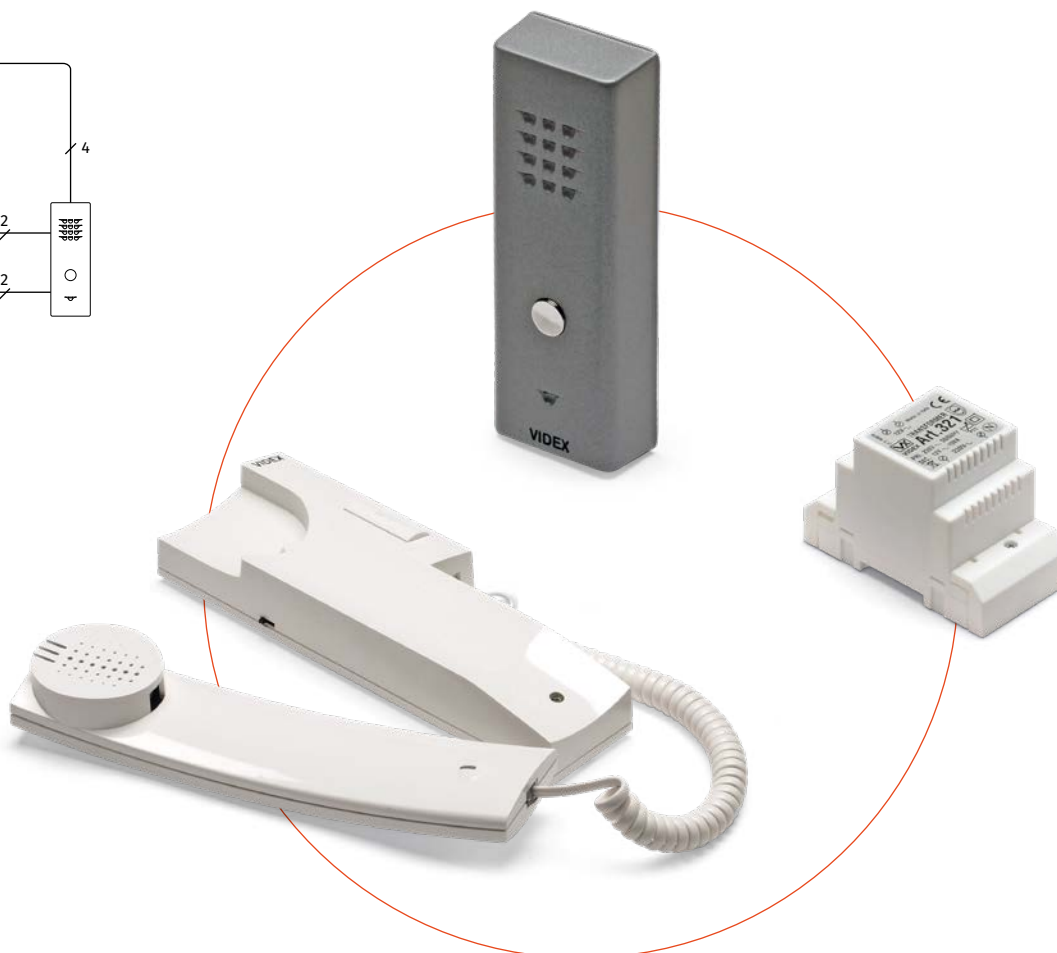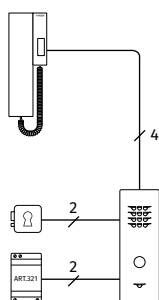

<b>SLK</b>	
<b>CONNECTION</b>	STANDARD 3+1 AUDIO
<b>OUTDOOR STATION</b>	Slim Series
<b>SPEAKER UNIT</b>	1 x 436
<b>CALL BUTTONS</b>	1
<b>DOOR OPENING</b>	Built-in Lock Relay
<b>CALL</b>	Electronic Call Tone
<b>MOUNTING</b>	Surface
<b>INDOOR STATION</b>	1 x 3011
<b>SERIES</b>	3000 Series Smart Range
<b>CALL</b>	Electronic Call Tone
<b>BUTTONS</b>	1: Door open
<b>CONTROLS</b>	Call tone volume (3 levels)
<b>MOUNTING</b>	Surface
<b>POWER SUPPLY UNIT</b>	1 x 321
<b>INPUT/OUTPUT/VA</b>	230Vac / 12Vac / 15VA
<b>SIZE</b>	3 Modules A Type DIN Box (52.5x105x65mm)
<b>MOUNTING</b>	DIN bar or direct wall fixing
<b>PACKAGING</b>	Giftbox
<b>SIZE</b>	25.5x23.5x7cm
<b>WEIGHT</b>	1.5Kg








# VIDEOKITS


8000 SERIES		PAGE
VK8K	6 WIRE BUS INTERCOMMUNICATING	30
VK8KC Videocode	6 WIRE BUS CODELOCK UNIT INTERCOMMUNICATING	32
4000 SERIES		
VK4K	6 WIRE BUS INTERCOMMUNICATING WIDE CAMERA OPT.	34
VK4KC Videocode	6 WIRE BUS CODELOCK UNIT INTERCOMMUNICATING WIDE CAMERA OPT.	36
VK4KX	6 WIRE BUS PROXIMITY READER INTERCOMMUNICATING WIDE CAMERA OPT.	38
VRVK	6 WIRE BUS VANDAL RESISTANT INTERCOMMUNICATING WIDE CAMERA OPT.	40
VRVKC Videocode	6 WIRE BUS VANDAL RESISTANT CODELOCK UNIT INTERCOMMUNICATING WIDE CAMERA OPT.	42
ESVK	2 WIRE BUS INTERCOMMUNICATING WIDE CAMERA OPT.	44
ESVKC Videocode	2 WIRE BUS CODELOCK UNIT INTERCOMMUNICATING WIDE CAMERA OPT.	48
ESVKX	2 WIRE BUS PROXIMITY READER INTERCOMMUNICATING WIDE CAMERA OPT.	52

# Part number composition

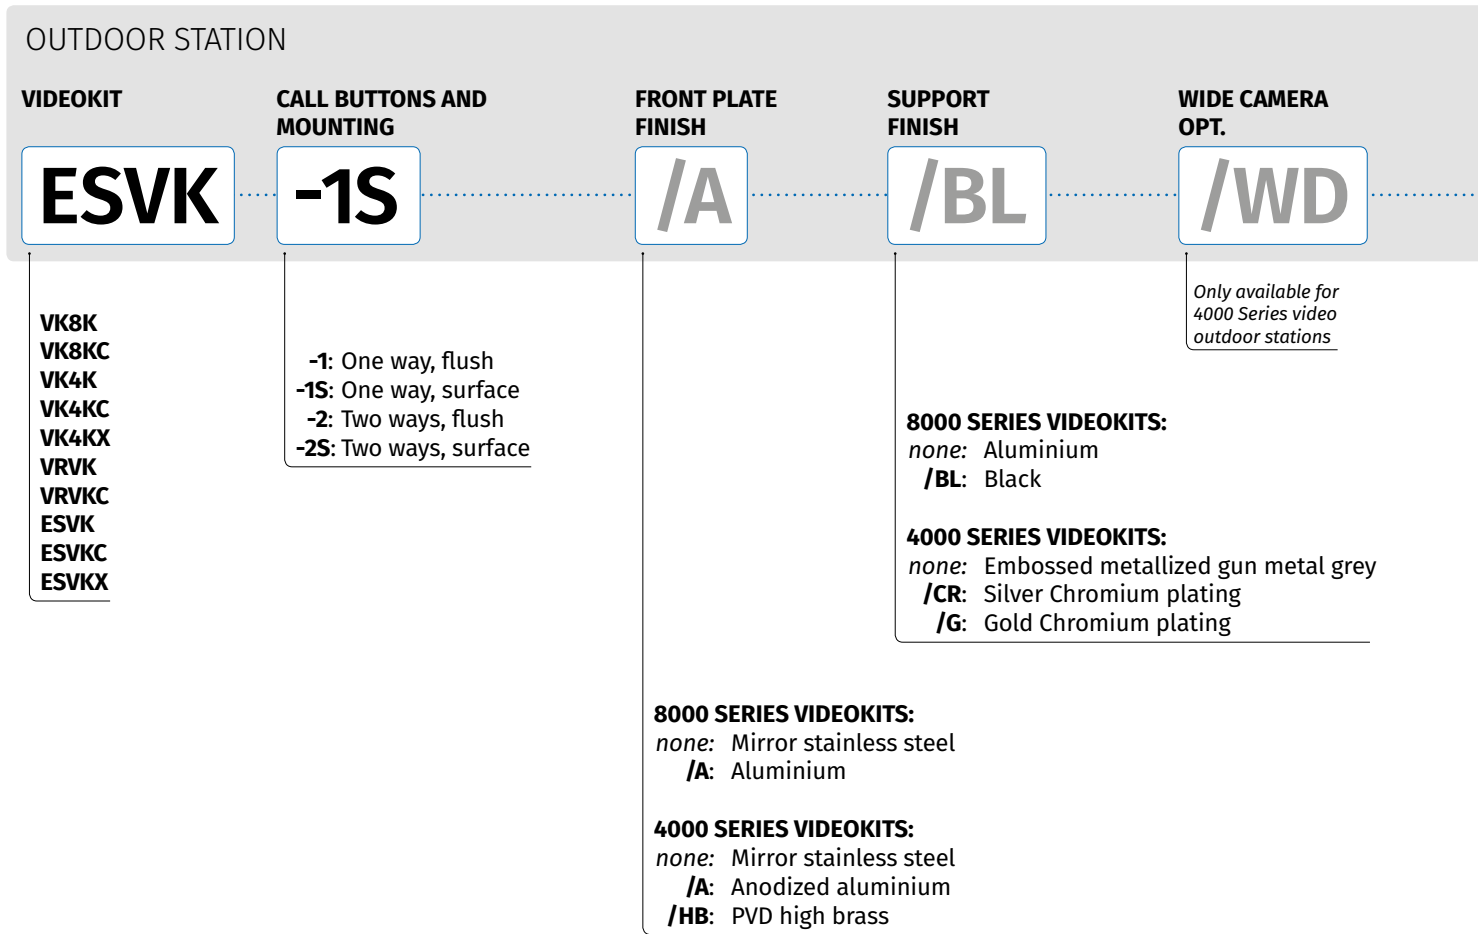


## Symbols legend

### System connection



### Outdoor station features

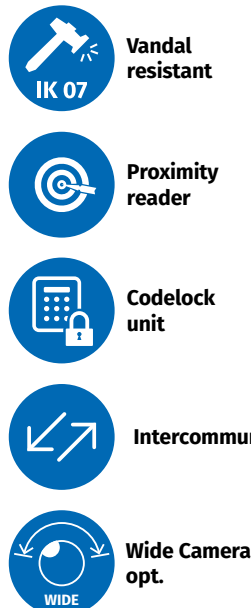

## Glossary

<b>Busy LED</b>	Advise that the system is busy i.e. multiple entrance system
<b>Ring LED</b>	Advise that the call is in progress
<b>Speak LED</b>	Advise that the conversation has started
<b>Door open LED</b>	Advise that the door is open
<b>ON LED</b>	Advise that the videophone is switched ON
<b>Service button</b>	A button used to enable an additional service, may require an additional connection
<b>Privacy</b>	Service that allows to temporarily disable the call
<b>Intercommunicating call</b>	Service to start an intercommunication
<b>Camera recall</b>	Service to power up the system and see the camera in stand by
<b>Push to talk</b>	Service to enable the "push to talk" communication mode
<b>Push to exit</b>	Active low input that enables the integral relay

INDOOR STATION

VIDEOPHONE MODEL

**/KRV782**

**6000 SERIES:**

- /6256** for videokits:
- /6358** VK4K - VK4KC
- /6458** VRVK - VRVK
- /6758** VK8K - VK8KC

- /6286**
- /6388** for videokits:
- /6488** ESVK - ESVK
- /6788**

**KRISTALLO® SERIES:**

- /KRV86**
- /KRV88** for videokits:
- /KRV82** ESVK - ESVK

**5000 - 3600 SERIES:**

- /5456** for videokits:
- /3656** VK4K - VK4KC
- VRVK - VRVK
- VK8K - VK8KC

- /3686** for videokits:
- ESVK - ESVK

KRISTALLO®/5000 SERIES VIDEOPHONE FINISHING

**/W**

**KRISTALLO® SERIES:**

- /W:** White
- /B:** Black

**5000 SERIES:**

- none:** Gloss white
- /CR:** Silver
- /CA:** Carbon fibre effect

VIDEO MEMORY OPT.

**/VM**

Videophones with memory board facility allow, either automatically or manually, to record a picture (or a videoclip, depending on the model) of the visitor who calls. Thanks to the ability to record several images or video clips (the number depends on the model), this facility helps to ensure the safety of the users by knowing who has called.



The memory board must be requested when ordering a video phone, as it cannot be added later.

Not available for 3656 and 3686 videophones

## Packaging guide

Colour explanation  
(depending on the indoor station)

6200	6300	6400	6700
Kristallo® 3.5" Handset	Kristallo® 3.5" Hands free		Kristallo® 7"
3600	5000		

### Outdoor station symbols explanation

4000 Series	4000 Series Vandal resistant	8000 Series
Camera/speaker unit (1 module)	Camera unit and speaker unit (2 modules)	Camera/speaker unit (1 module)
Camera/speaker unit plus access control (2 modules)	Camera unit, speaker unit plus access control (3 modules)	Camera/speaker unit plus access control (2 modules)
Camera/speaker unit with integrated proximity access control (1 module)		



# VK8K Series Videokit



One way or two way



6 WIRE BUS



Intercom.

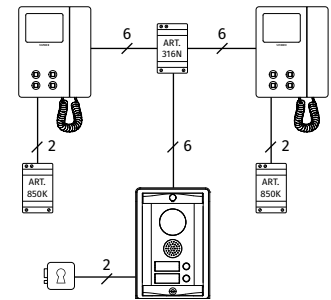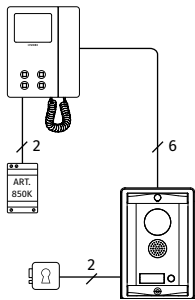

	VK8K-1	VK8K-1S	VK8K-2	VK8K-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	8000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 8833-1		1 x 8833-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Not available			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 8855	1 x 8885	1 x 8855	1 x 8885
<b>RAINSHIELD</b>	1 x 8875	—	1 x 8875	—
<b>SIZE</b>	1.5 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>VIDEO DISTRIBUTOR</b>	—		1 x 316N	
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

6256

3.5" conventional videophone



	VK8K-1/6256	VK8K-1S/6256	VK8K-2/6256	VK8K-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	3.1Kg	3.6Kg	4.3Kg	4.8Kg

VK8K/6256

6358

3.5" hands free videomonitor



	VK8K-1/6358	VK8K-1S/6358	VK8K-2/6358	VK8K-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4Kg	4.6Kg

VK8K/6358

6458

4.3" hands free videomonitor



	VK8K-1/6458	VK8K-1S/6458	VK8K-2/6458	VK8K-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4Kg	4.6Kg

VK8K/6458

6758

7" hands free videomonitor




	VK8K-1/6758	VK8K-1S/6758	VK8K-2/6758	VK8K-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	3.1Kg	3.6Kg	4.4Kg	4.9Kg

VK8K/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# VK8KC Series Videocode

One way or two way videokit with codelock



	VK8KC-1	VK8KC-1S	VK8KC-2	VK8KC-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	8000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 8833-1		1 x 8833-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Not available			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 8800			
<b>CODES / RELAYS</b>	2 / 2			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 8857	1 x 8887	1 x 8857	1 x 8887
<b>RAINSHIELD</b>	1 x 8877	—	1 x 8877	—
<b>SIZE</b>	2.5 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>VIDEO DISTRIBUTOR</b>	—		1 x 316N	
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	41.5x17x15cm		18x24x54cm	

### SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening



**6256**

3.5" conventional videophone



	VK8KC-1/6256	VK8KC-1S/6256	VK8KC-2/6256	VK8KC-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>62931</b>			
<b>PACKAGING WEIGHT</b>	3.5Kg	4Kg	4.7Kg	5.2Kg

VK8KC/6256

**6358**

3.5" hands free videomonitor



	VK8KC-1/6358	VK8KC-1S/6358	VK8KC-2/6358	VK8KC-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>63931</b>			
<b>PACKAGING WEIGHT</b>	3.4Kg	3.9Kg	4.5Kg	5Kg

VK8KC/6358

**6458**

4.3" hands free videomonitor



	VK8KC-1/6458	VK8KC-1S/6458	VK8KC-2/6458	VK8KC-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>64931</b>			
<b>PACKAGING WEIGHT</b>	3.4Kg	3.9Kg	4.5Kg	5Kg

VK8KC/6458

**6758**

7" hands free videomonitor



	VK8KC-1/6758	VK8KC-1S/6758	VK8KC-2/6758	VK8KC-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>67931</b>			
<b>PACKAGING WEIGHT</b>	3.5Kg	4Kg	4.8Kg	5.3Kg

VK8KC/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# VK4K Series Videokit

One way or two way






6 WIRE BUS



Intercom.



Wide camera opt.

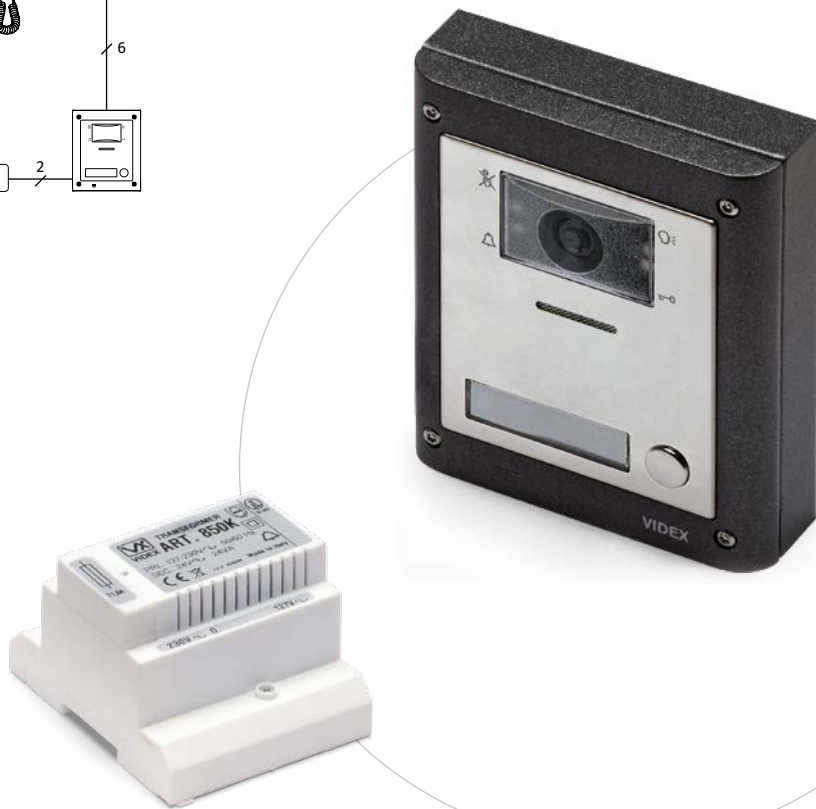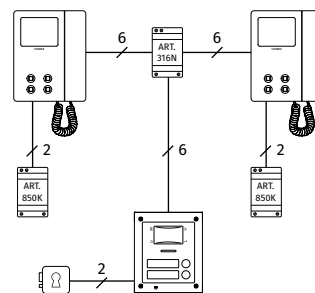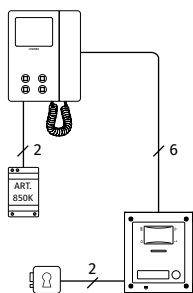

	VK4K-1	VK4K-1S	VK4K-2	VK4K-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4833-1		1 x 4833-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>2</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>VIDEO DISTRIBUTOR</b>	-		1 x 316N	
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

6256

3.5" conventional videophone



	VK4K-1/6256	VK4K-1S/6256	VK4K-2/6256	VK4K-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	3.7Kg	3.9Kg

VK4K/6256

6358

3.5" hands free videomonitor



	VK4K-1/6358	VK4K-1S/6358	VK4K-2/6358	VK4K-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	2.3Kg	2.6Kg	3.4Kg	3.7Kg

VK4K/6358

6458

4.3" hands free videomonitor



	VK4K-1/6458	VK4K-1S/6458	VK4K-2/6458	VK4K-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	3.6Kg	3.8Kg

VK4K/6458

6758

7" hands free videomonitor



	VK4K-1/6758	VK4K-1S/6758	VK4K-2/6758	VK4K-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	3.7Kg	3.9Kg

VK4K/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# VK4KC Series Videocode

One way or two way videokit with codelock



6 WIRE BUS





Codelock unit



Intercom.



Wide camera opt.

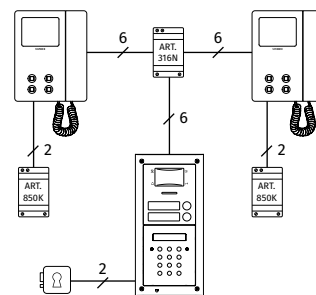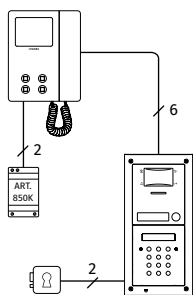

	VK4KC-1	VK4KC-1S	VK4KC-2	VK4KC-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4833-1		1 x 4833-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 4800M			
<b>CODES / RELAYS</b>	3 / 3			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>2</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>VIDEO DISTRIBUTOR</b>	-		1 x 316N	
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	41.5x17x15cm		18x24x54cm	

### SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

6256

3.5" conventional videophone



	VK4KC-1/6256	VK4KC-1S/6256	VK4KC-2/6256	VK4KC-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4.2Kg	4.7Kg

VK4KC/6256

6358

3.5" hands free videomonitor



	VK4KC-1/6358	VK4KC-1S/6358	VK4KC-2/6358	VK4KC-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4Kg	4.6Kg

VK4KC/6358

6458

4.3" hands free videomonitor



	VK4KC-1/6458	VK4KC-1S/6458	VK4KC-2/6458	VK4KC-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4Kg	4.6Kg

VK4KC/6458

6758

7" hands free videomonitor



	VK4KC-1/6758	VK4KC-1S/6758	VK4KC-2/6758	VK4KC-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4.2Kg	4.9Kg

VK4KC/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# VK4KX Series Videokit

One way or two way videokit with integrated proximity access control



6 WIRE BUS





Proximity reader



Intercom.



Wide camera opt.

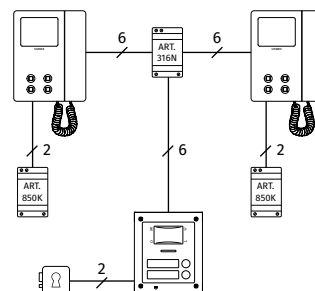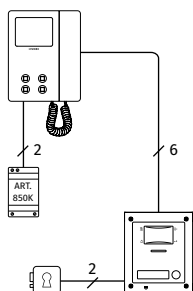

	VK4KX-1	VK4KX-1S	VK4KX-2	VK4KX-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER AND PROXIMITY UNIT MODULE</b>	1 x 4833X-1		1 x 4833X-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>KEYS / RELAYS</b>	Up to 30 / 1			
<b>RFID FREQUENCY</b>	125KHz			
<b>FOBS</b>	1 x 955/C card format 2 x 955/T tag format		1 x 955/C card format 4 x 955/T tag format	
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>2</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>INTEGRATED PROXIMITY ACCESS</b>	Up to 30 users
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**6256**

3.5" conventional videophone



	VK4KX-1/6256	VK4KX-1S/6256	VK4KX-2/6256	VK4KX-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>62931</b>			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	3.7Kg	3.9Kg

VK4KX/6256

**6358**

3.5" hands free videomonitor



	VK4KX-1/6358	VK4KX-1S/6358	VK4KX-2/6358	VK4KX-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>63931</b>			
<b>PACKAGING WEIGHT</b>	2.3Kg	2.6Kg	3.4Kg	3.7Kg

VK4KX/6358

**6458**

4.3" hands free videomonitor



	VK4KX-1/6458	VK4KX-1S/6458	VK4KX-2/6458	VK4KX-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>64931</b>			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	3.6Kg	3.8Kg

VK4KX/6458

**6758**

7" hands free videomonitor



	VK4KX-1/6758	VK4KX-1S/6758	VK4KX-2/6758	VK4KX-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>67931</b>			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	3.7Kg	3.9Kg

VK4KX/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# VRVK Series Videokit

One way or two way



6 WIRE BUS





Vandal resistant



Intercom.



Wide camera opt.

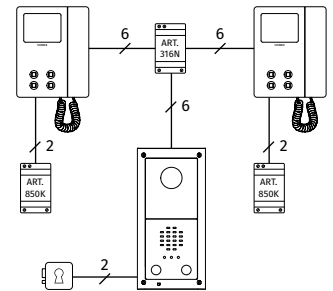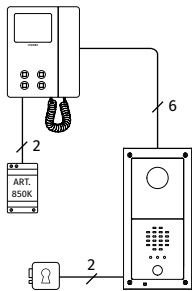

	VRVK-1	VRVK-1S	VRVK-2	VRVK-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series Vandal resistant			
<b>CAMERA MODULE</b>	1 x VR4KCMC			
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>SPEAKER UNIT MODULE</b>	1 x VR4KAMK-1		1 x VR4KAMK-2	
<b>LEDS</b>	3: Speak, Busy, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>2</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>VIDEO DISTRIBUTOR</b>	-		1 x 316N	
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

## SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening
<b>VANDAL RESISTANT</b>	IK Rate 07



6256

3.5" conventional videophone



	VRVK-1/6256	VRVK-1S/6256	VRVK-2/6256	VRVK-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	3.2Kg	3.6Kg	4.5Kg	4.9Kg

VRVK/6256

6358

3.5" hands free videomonitor



	VRVK-1/6358	VRVK-1S/6358	VRVK-2/6358	VRVK-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	3Kg	3.5Kg	4.2Kg	4.7Kg

VRVK/6358

6458

4.3" hands free videomonitor



	VRVK-1/6458	VRVK-1S/6458	VRVK-2/6458	VRVK-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	3.2Kg	3.6Kg	4.4Kg	4.8Kg

VRVK/6458

6758

7" hands free videomonitor



	VRVK-1/6758	VRVK-1S/6758	VRVK-2/6758	VRVK-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	3.3Kg	3.7Kg	4.5Kg	4.9Kg

VRVK/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# VRVKC Series Videocode

One way or two way videokit with codelock



6 WIRE BUS



Vandal resistant



Codelock unit



Intercom.



Wide camera opt.



	VRVKC-1	VRVKC-1S	VRVKC-2	VRVKC-2S
<b>CONNECTION</b>	6 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series Vandal resistant			
<b>CAMERA MODULE</b>	1 x VR4KCMC			
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>SPEAKER UNIT MODULE</b>	1 x VR4KAMK-1		1 x VR4KAMK-2	
<b>LEDS</b>	3: Speak, Busy, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x VR4KCLM			
<b>CODES / RELAYS</b>	2 / 2			
<b>ILLUMINATION</b>	No			
<b>MOUNTING BOX</b>	1 x 4853	1 x 4883	1 x 4853	1 x 4883
<b>RAINSHIELD OPT.<sup>2</sup></b>	4873	4893	4873	4893
<b>SIZE</b>	3 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 850K		2 x 850K	
<b>INPUT/OUTPUT/VA</b>	230-127Vac / 24Vac / 24VA			
<b>SIZE</b>	5 Modules A Type DIN Box (87x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>VIDEO DISTRIBUTOR</b>	-		1 x 316N	
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	18x24x54cm			

### SPECIAL FEATURES

<b>MAX DOOR STATIONS</b>	Up to 4
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening
<b>VANDAL RESISTANT</b>	IK Rate 07

6256

3.5" conventional videophone



	VRVKC-1/6256	VRVKC-1S/6256	VRVKC-2/6256	VRVKC-2S/6256
<b>INDOOR STATION</b>	1 x 6256		2 x 6256	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	4.1Kg	4.7Kg	5.3Kg	5.9Kg

VRVKC/6256

6358

3.5" hands free videomonitor



	VRVKC-1/6358	VRVKC-1S/6358	VRVKC-2/6358	VRVKC-2S/6358
<b>INDOOR STATION</b>	1 x 6358		2 x 6358	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	3.8Kg	4.7Kg	5.1Kg	5.8Kg

VRVKC/6358

6458

4.3" hands free videomonitor



	VRVKC-1/6458	VRVKC-1S/6458	VRVKC-2/6458	VRVKC-2S/6458
<b>INDOOR STATION</b>	1 x 6458		2 x 6458	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	4.1Kg	4.7Kg	5.1Kg	5.8Kg

VRVKC/6458

6758

7" hands free videomonitor



	VRVKC-1/6758	VRVKC-1S/6758	VRVKC-2/6758	VRVKC-2S/6758
<b>INDOOR STATION</b>	1 x 6758		2 x 6758	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	4.1Kg	4.7Kg	5.3Kg	6.1Kg

VRVKC/6758

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# ESVK Series Videokit

## 6200, 6300, 6400, 6700 Series

Pure two wire one way or two way system



**2 WIRE  
BUS**



**Intercom.**



**Wide camera  
opt.**



	ESVK-1	ESVK-1S	ESVK-2	ESVK-2S
<b>CONNECTION</b>	2 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4333-1		1 x 4333-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>2</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 2321			
<b>INPUT/OUTPUT/A</b>	230Vac / 32Vdc / 0.8A			
<b>SIZE</b>	9 Modules A Type DIN Box (157.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX CALL BUTTONS</b>	Up to 12
<b>MAX DOOR STATIONS</b>	Up to 8 using entrances exchanger Art.2301N
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**NOTE: 2 wire bus (not polarity conscious).**

**6286**

3.5" conventional videophone



	ESVK-1/6286	ESVK-1S/6286	ESVK-2/6286	ESVK-2S/6286
<b>INDOOR STATION</b>	1 x 6286		2 x 6286	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation, Door-open/Intercommunicating call, Camera recall/Camera switch			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.8Kg	2.8Kg	3.1Kg

ESVK/6286

**6388**

3.5" hands free videomonitor



	ESVK-1/6388	ESVK-1S/6388	ESVK-2/6388	ESVK-2S/6388
<b>INDOOR STATION</b>	1 x 6388		2 x 6388	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	2.7Kg	2.9Kg

ESVK/6388

**6488**

4.3" hands free videomonitor



	ESVK-1/6488	ESVK-1S/6488	ESVK-2/6488	ESVK-2S/6488
<b>INDOOR STATION</b>	1 x 6488		2 x 6488	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES</b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	2.7Kg	2.9Kg

ESVK/6488

**6788**

7" hands free videomonitor



	ESVK-1/6788	ESVK-1S/6788	ESVK-2/6788	ESVK-2S/6788
<b>INDOOR STATION</b>	1 x 6788		2 x 6788	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.8Kg	2.9Kg	3.2Kg

ESVK/6788

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# ESVK Series Videokit

## Kristallo® Series

Pure two wire one way or two way system



**2 WIRE  
BUS**



**Intercom.**



**Wide camera  
opt.**



	ESVK-1	ESVK-1S	ESVK-2	ESVK-2S
<b>CONNECTION</b>	2 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4333-1		1 x 4333-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>2</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 2321			
<b>INPUT/OUTPUT/A</b>	230Vac / 32Vdc / 0.8A			
<b>SIZE</b>	9 Modules A Type DIN Box (157.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX CALL BUTTONS</b>	Up to 12
<b>MAX DOOR STATIONS</b>	Up to 8 using entrances exchanger Art.2301N
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**NOTE: 2 wire bus (not polarity conscious).**

### KRV86

3.5" conventional and hands free videomonitor



	ESVK-1/KRV86	ESVK-1S/KRV86	ESVK-2/KRV86	ESVK-2S/KRV86
<b>INDOOR STATION</b>	1 x KRV86		2 x KRV86	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT OSD			
<b>HANDSET / HANDS FREE</b>	Handset / Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds video clips stored in built in memory. Ability to copy pictures/video clips to MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Date & time, Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	/W white - /B black			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	KRV931			
<b>PACKAGING WEIGHT</b>	2.6Kg	2.9Kg	3.2Kg	3.5Kg

ESVK/KRV86

### KRV88

3.5" hands free videomonitor



	ESVK-1/KRV88	ESVK-1S/KRV88	ESVK-2/KRV88	ESVK-2S/KRV88
<b>INDOOR STATION</b>	1 x KRV88		2 x KRV88	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT OSD			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds video clips stored in built in memory. Ability to copy pictures/video clips to MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Date & time, Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface Flush (requires KRV981 <sup>2</sup> or KRV983 <sup>2</sup> )			
<b>FINISHING</b>	/W white - /B black			
<b>PACKAGING WEIGHT</b>	2.4Kg	2.7Kg	2.8Kg	3.1Kg

ESVK/KRV88

### KRV782

7" hands free videomonitor



	ESVK-1/KRV782	ESVK-1S/KRV782	ESVK-2/KRV782	ESVK-2S/KRV782
<b>INDOOR STATION</b>	1 x KRV782		2 x KRV782	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	Camera recall/Answer/End conversation/Push to talk, Intercommunicating call/Door-open, Bus relay activation, Privacy/Call reject, Melody volume/Camera switch, Speech volume adjustment, Brightness and hue adjustment			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface Flush (requires KRV7981 <sup>2</sup> or KRV7983 <sup>2</sup> )			
<b>FINISHING</b>	/W white - /B black			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	KRV7931			
<b>PACKAGING WEIGHT</b>	2.6Kg	2.9Kg	3.2Kg	3.5Kg


ESVK/KRV782

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# ESVKC Series Videocode

## 6200, 6300, 6400, 6700 Series

Pure two wire one way or two way videokit with codelock



**2 WIRE  
BUS**



**Codelock  
unit**



**Intercom.**



**Wide camera  
opt.**



	ESVKC-1	ESVKC-1S	ESVKC-2	ESVKC-2S
<b>CONNECTION</b>	2 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4333-1		1 x 4333-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDS</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 4800M			
<b>CODES / RELAYS</b>	3 / 3			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>2</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 2321			
<b>INPUT/OUTPUT/A</b>	230Vac / 32Vdc / 0.8A			
<b>SIZE</b>	9 Modules A Type DIN Box (157.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>POWER SUPPLY CONV.</b>	1 x 2322			
<b>INPUT/OUTPUT/MA</b>	BUS line / 12Vdc / 100mA			
<b>SIZE</b>	Plastic box (50x60x20mm)			
<b>MOUNTING</b>	Direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	41.5x17x15cm		18x24x54cm	

### SPECIAL FEATURES

<b>MAX CALL BUTTONS</b>	Up to 12
<b>MAX DOOR STATIONS</b>	Up to 8 using entrances exchanger Art.2301N
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**NOTE: 2 wire bus (not polarity conscious).**



**6286**

3.5" conventional videophone



	ESVKC-1/6286	ESVKC-1S/6286	ESVKC-2/6286	ESVKC-2S/6286
<b>INDOOR STATION</b>	1 x 6286		2 x 6286	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation, Door-open/Intercommunicating call, Camera recall/Camera switching call, camera recall			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	3.1Kg	3.5Kg	3.4Kg	3.8Kg

ESVKC/6286

**6388**

3.5" hands free videomonitor



	ESVKC-1/6388	ESVKC-1S/6388	ESVKC-2/6388	ESVKC-2S/6388
<b>INDOOR STATION</b>	1 x 6388		2 x 6388	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/bus relay activation, Door-open/Intercommunicating call, Answer/Camera recall			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	3Kg	3.3Kg	3.2Kg	3.6Kg

ESVKC/6388

**6488**

4.3" hands free videomonitor



	ESVKC-1/6488	ESVKC-1S/6488	ESVKC-2/6488	ESVKC-2S/6488
<b>INDOOR STATION</b>	1 x 6488		2 x 6488	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	3Kg	3.4Kg	3.3Kg	3.7Kg

ESVKC/6488

**6788**

7" hands free videomonitor




	ESVKC-1/6788	ESVKC-1S/6788	ESVKC-2/6788	ESVKC-2S/6788
<b>INDOOR STATION</b>	1 x 6788		2 x 6788	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	3Kg	3.4Kg	3.4Kg	3.9Kg

ESVKC/6788

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# ESVKC Series Videocode Kristallo® Series

Pure two wire one way or two way videokit with codelock



**2 WIRE BUS**



**Codelock unit**



**Intercom.**



**Wide camera opt.**



	ESVKC-1	ESVKC-1S	ESVKC-2	ESVKC-2S
<b>CONNECTION</b>	2 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER UNIT MODULE</b>	1 x 4333-1		1 x 4333-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDS</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>CODELOCK UNIT</b>	1 x 4800M			
<b>CODES / RELAYS</b>	3 / 3			
<b>ILLUMINATION</b>	Yes			
<b>MOUNTING BOX</b>	1 x 4852	1 x 4882	1 x 4852	1 x 4882
<b>RAINSHIELD OPT.<sup>2</sup></b>	4872	4892	4872	4892
<b>SIZE</b>	2 modules			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 2321			
<b>INPUT/OUTPUT/A</b>	230Vac / 32Vdc / 0.8A			
<b>SIZE</b>	9 Modules A Type DIN Box (157.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>POWER SUPPLY CONV.</b>	1 x 2322			
<b>INPUT/OUTPUT/MA</b>	BUS line / 12Vdc / 100mA			
<b>SIZE</b>	Plastic box (50x60x20mm)			
<b>MOUNTING</b>	Direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	41.5x17x15cm		18x24x54cm	

### SPECIAL FEATURES

<b>MAX CALL BUTTONS</b>	Up to 12
<b>MAX DOOR STATIONS</b>	Up to 8 using entrances exchanger Art.2301N
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**NOTE: 2 wire bus (not polarity conscious).**

**KRV86**

3.5" conventional and hands free videomonitor



	ESVVC-1/KRV86	ESVVC-1S/KRV86	ESVVC-2/KRV86	ESVVC-2S/KRV86
<b>INDOOR STATION</b>	1 x KRV86		2 x KRV86	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT OSD			
<b>HANDSET / HANDS FREE</b>	Handset / Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch			
<b>LEDS</b>	3: door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds video clips stored in built in memory. Ability to copy pictures/video clips to MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Date & time, Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	/W white - /B black			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	KRV931			
<b>PACKAGING WEIGHT</b>	3.1Kg	3.5Kg	3.7Kg	4.1Kg

ESVVC/KRV86

**KRV88**

3.5" hands free videomonitor



	ESVVC-1/KRV88	ESVVC-1S/KRV88	ESVVC-2/KRV88	ESVVC-2S/KRV88
<b>INDOOR STATION</b>	1 x KRV88		2 x KRV88	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT OSD			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch			
<b>LEDS</b>	3: door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds video clips stored in built in memory. Ability to copy pictures/video clips to MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Date & time, Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface Flush (requires KRV981 <sup>2</sup> or KRV983 <sup>2</sup> )			
<b>FINISHING</b>	/W white - /B black			
<b>PACKAGING WEIGHT</b>	3Kg	3.4Kg	3.4Kg	3.8Kg

ESVVC/KRV88

**KRV782**

7" hands free videomonitor



	ESVVC-1/KRV782	ESVVC-1S/KRV782	ESVVC-2/KRV782	ESVVC-2S/KRV782
<b>INDOOR STATION</b>	1 x KRV782		2 x KRV782	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	Camera recall/Answer/End conversation/Push to talk, Intercommunicating call/Door-open, Bus relay activation, Privacy/Call reject, Melody volume/Camera switch, Speech volume adjustment, Brightness and hue adjustment			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface Flush (requires KRV7981 <sup>2</sup> or KRV7983 <sup>2</sup> )			
<b>FINISHING</b>	/W white - /B black			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	KRV7931			
<b>PACKAGING WEIGHT</b>	3.1Kg	3.5Kg	3.7Kg	4.1Kg


ESVVC/KRV782

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# ESVKX Series Videokit

## 6200, 6300, 6400, 6700 Series

Pure two wire one way or two way system with integrated proximity access control



**2 WIRE BUS**



**Proximity reader**



**Intercom.**



**Wide camera opt.**



	ESVKX-1	ESVKX-1S	ESVKX-2	ESVKX-2S
<b>CONNECTION</b>	2 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER AND PROXIMITY UNIT MODULE</b>	1 x 4333X-1		1 x 4333X-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDS</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>KEYS / RELAYS</b>	Up to 50 / 1			
<b>RFID FREQUENCY</b>	125KHz			
<b>FOBS</b>	1 x 955/C card format 2 x 955/T tag format		1 x 955/C card format 4 x 955/T tag format	
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>2</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 2321			
<b>INPUT/OUTPUT/A</b>	230Vac / 32Vdc / 0.8A			
<b>SIZE</b>	9 Modules A Type DIN Box (157.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX CALL BUTTONS</b>	Up to 12
<b>MAX DOOR STATIONS</b>	Up to 8 using entrances exchanger Art.2301N
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>INTEGRATED PROXIMITY ACCESS</b>	Up to 50 users
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**NOTE: 2 wire bus (not polarity conscious).**

**6286**

3.5" conventional videophone



	ESVIKX-1/6286	ESVIKX-1S/6286	ESVIKX-2/6286	ESVIKX-2S/6286
<b>INDOOR STATION</b>	1 x 6286		2 x 6286	
<b>SERIES</b>	6200 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation, Door-open/Intercommunicating call, Camera recall/Camera switch			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.8Kg	2.8Kg	3.1Kg

ESVIKX/6286

**6388**

3.5" hands free videomonitor



	ESVIKX-1/6388	ESVIKX-1S/6388	ESVIKX-2/6388	ESVIKX-2S/6388
<b>INDOOR STATION</b>	1 x 6388		2 x 6388	
<b>SERIES</b>	6300 Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	63931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	2.7Kg	2.9Kg

ESVIKX/6388

**6488**

4.3" hands free videomonitor



	ESVIKX-1/6488	ESVIKX-1S/6488	ESVIKX-2/6488	ESVIKX-2S/6488
<b>INDOOR STATION</b>	1 x 6488		2 x 6488	
<b>SERIES</b>	6400 Series			
<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.7Kg	2.7Kg	2.9Kg

ESVIKX/6488

**6788**

7" hands free videomonitor



	ESVIKX-1/6788	ESVIKX-1S/6788	ESVIKX-2/6788	ESVIKX-2S/6788
<b>INDOOR STATION</b>	1 x 6788		2 x 6788	
<b>SERIES</b>	6700 Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk			
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	67931			
<b>PACKAGING WEIGHT</b>	2.5Kg	2.8Kg	2.9Kg	3.2Kg

ESVIKX/6788

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# ESVKX Series Videokit

## Kristallo® Series

Pure two wire one way or two way system with integrated proximity access control



**2 WIRE BUS**



**Proximity reader**



**Intercom.**



**Wide camera opt.**



	ESVKX-1	ESVKX-1S	ESVKX-2	ESVKX-2S
<b>CONNECTION</b>	2 WIRE BUS			
<b>OUTDOOR STATION</b>	4000 Series			
<b>SPEAKER AND PROXIMITY UNIT MODULE</b>	1 x 4333X-1		1 x 4333X-2	
<b>CAMERA TYPE</b>	Day/Night colour camera with infrared illumination LEDs			
<b>WIDE CAMERA OPT.</b>	Available			
<b>LEDs</b>	4: Busy, Ring, Speak, Door Open			
<b>CALL BUTTONS</b>	1		2	
<b>DOOR OPENING</b>	Built-in Lock Relay Dry Contacts C, NC, NO or capacitor discharge			
<b>CALL</b>	Electronic Call Tone			
<b>KEYS / RELAYS</b>	Up to 50 / 1			
<b>FOBS</b>	1 x 955/C card format 2 x 955/T tag format		1 x 955/C card format 4 x 955/T tag format	
<b>MOUNTING BOX</b>	1 x 4851	1 x 4881	1 x 4851	1 x 4881
<b>RAINSHIELD OPT.<sup>2</sup></b>	4871	4891	4871	4891
<b>SIZE</b>	1 module			
<b>MOUNTING</b>	Flush	Surface	Flush	Surface
<b>POWER SUPPLY UNIT</b>	1 x 2321			
<b>INPUT/OUTPUT/A</b>	230Vac / 32Vdc / 0.8A			
<b>SIZE</b>	9 Modules A Type DIN Box (157.5x105x65mm)			
<b>MOUNTING</b>	DIN bar or direct wall fixing			
<b>PACKAGING</b>	Giftbox			
<b>SIZE</b>	31x17x13cm		25.3x24.4x18.3cm	

### SPECIAL FEATURES

<b>MAX CALL BUTTONS</b>	Up to 12
<b>MAX DOOR STATIONS</b>	Up to 8 using entrances exchanger Art.2301N
<b>MAX INDOOR STATIONS</b>	Up to 4 per call button
<b>INTEGRATED PROXIMITY ACCESS</b>	Up to 50 users
<b>DISABILITY FRIENDLY</b>	Yes, acoustic & visual signalling
<b>CAMERA RECALL</b>	Yes, selective on multiple door station system
<b>INTERCOMMUNICATION</b>	Yes, between apartments or between extensions without any additional connection or requirement
<b>LOCAL BELL</b>	Yes with different call tone from external call
<b>PRIVACY</b>	Yes to temporarily disable the call
<b>PUSH TO EXIT INPUT</b>	Yes, 1
<b>PROGRAMMABLE TIMES</b>	Conversation and Door Opening

**NOTE: 2 wire bus (not polarity conscious).**

### KRV86

3.5" conventional and hands free videomonitor



	ESVKX-1/KRV86	ESVKX-1S/KRV86	ESVKX-2/KRV86	ESVKX-2S/KRV86
<b>INDOOR STATION</b>	1 x KRV86		2 x KRV86	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT OSD			
<b>HANDSET / HANDS FREE</b>	Handset / Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch			
<b>LEDS</b>	3: door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds video clips stored in built in memory. Ability to copy pictures/video clips to MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Date & time, Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	/W white - /B black			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	KRV931			
<b>PACKAGING WEIGHT</b>	2.6Kg	2.9Kg	3.2Kg	3.5Kg

ESVKX/KRV86

### KRV88

3.5" hands free videomonitor



	ESVKX-1/KRV88	ESVKX-1S/KRV88	ESVKX-2/KRV88	ESVKX-2S/KRV88
<b>INDOOR STATION</b>	1 x KRV88		2 x KRV88	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT OSD			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch			
<b>LEDS</b>	3: door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds video clips stored in built in memory. Ability to copy pictures/video clips to MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Date & time, Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface Flush (requires KRV981 <sup>2</sup> or KRV983 <sup>2</sup> )			
<b>FINISHING</b>	/W white - /B black			
<b>PACKAGING WEIGHT</b>	2.4Kg	2.7Kg	2.8Kg	3.1Kg

ESVKX/KRV88

### KRV782

7" hands free videomonitor



	ESVKX-1/KRV782	ESVKX-1S/KRV782	ESVKX-2/KRV782	ESVKX-2S/KRV782
<b>INDOOR STATION</b>	1 x KRV782		2 x KRV782	
<b>SERIES</b>	Kristallo® Series			
<b>DISPLAY</b>	7" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>BUTTONS/ SERVICES<sup>1</sup></b>	Camera recall/Answer/End conversation/Push to talk, Intercommunicating call/Door-open, Bus relay activation, Privacy/Call reject, Melody volume/Camera switch, Speech volume adjustment, Brightness and hue adjustment			
<b>LEDS</b>	2: Door open, Privacy ON			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card			
<b>ADJUSTMENT</b>	Melody volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface Flush (requires KRV7981 <sup>2</sup> or KRV7983 <sup>2</sup> )			
<b>FINISHING</b>	/W white - /B black			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	KRV7931			
<b>PACKAGING WEIGHT</b>	2.6Kg	2.9Kg	3.2Kg	3.5Kg

ESVKX/KRV782

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# 8000 SERIES AUDIO AND VIDEO OUTDOOR STATIONS



## Finishes

### FRONT PLATE



**Standard version**  
Mirror stainless steel



**/A Aluminium**  
When ordering put **/A**  
after the code

### MODULE SUPPORT PLUS RAINSHIELD AND SURFACE MOUNTING BOX



**Standard version**  
Aluminium



**/BL Black**  
When ordering put **/BL**  
after the code

### MODULE SUPPORT



**Standard version**  
Aluminium



**/BL Black**  
When ordering put **/BL**  
after the code

### RAINSHIELD (OPTIONAL)




**Standard version**  
Aluminium




**/BL Black**  
When ordering put **/BL**  
after the code



Audio outdoor stations measurements (in mm)

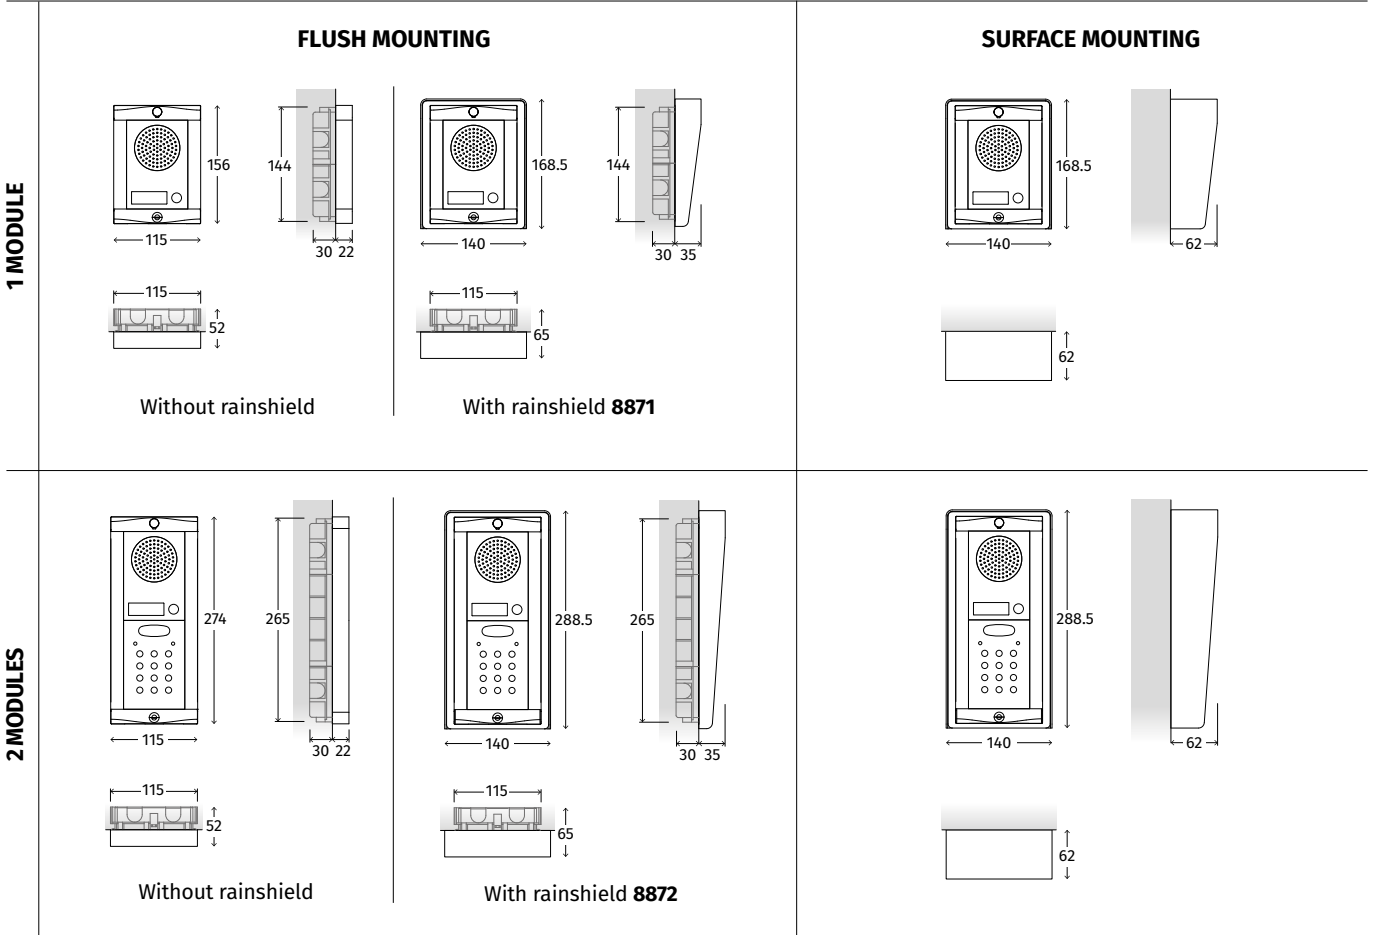

Video outdoor station measurements (in mm)

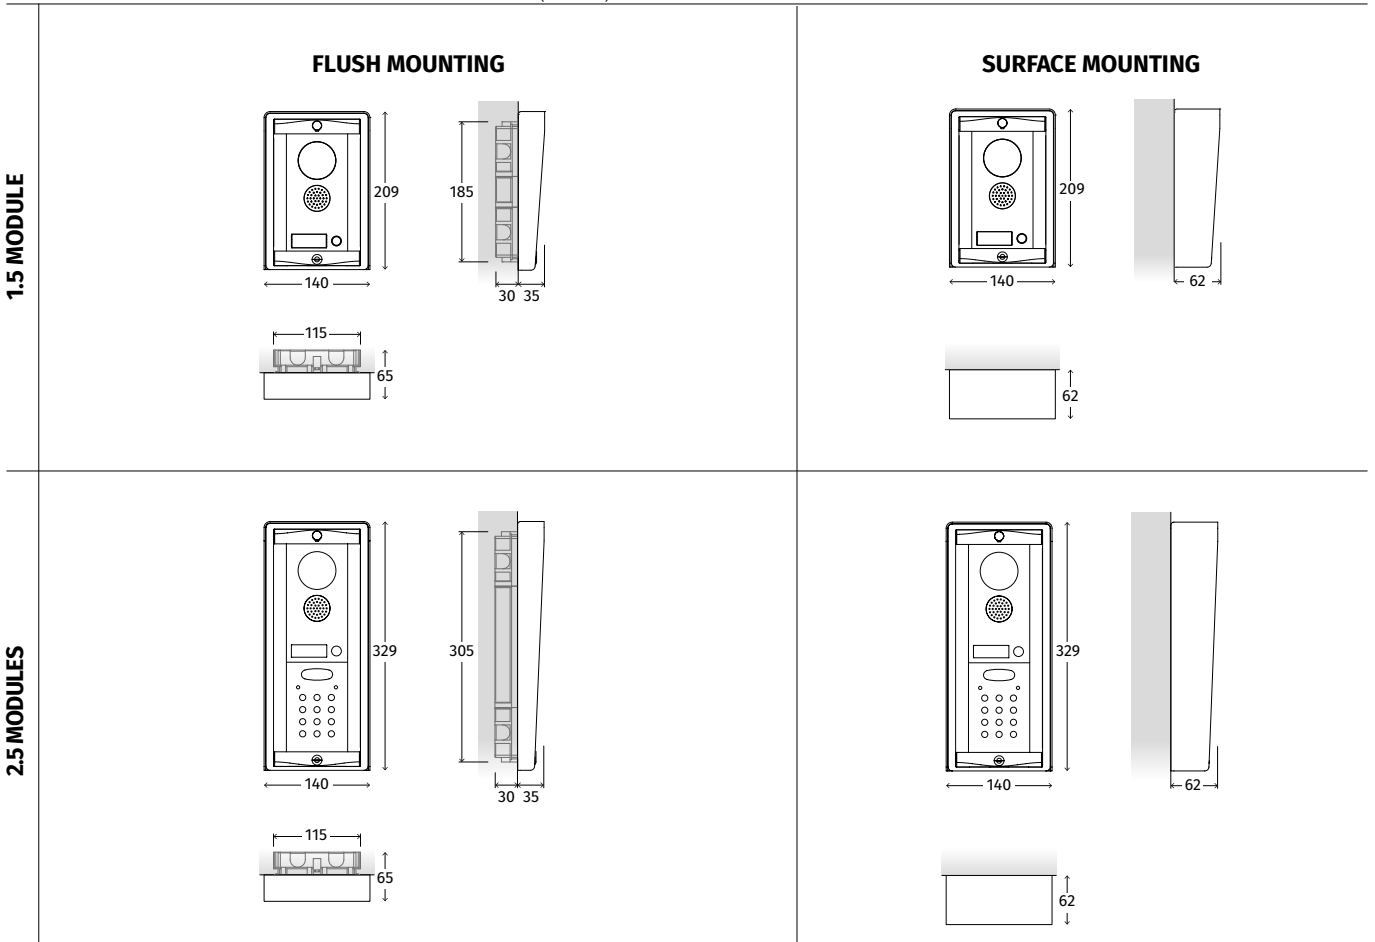

# 4000 SERIES AUDIO AND VIDEO OUTDOOR STATIONS

4000  
SERIES




## Finishes


### FRONT PLATE




**Standard version**  
Mirror stainless steel



**/A** Anodized Aluminium  
When ordering put **/A**  
after the code



**/HB** PVD High Brass  
When ordering put **/HB**  
after the code



**Vandal resistant version**  
Brushed stainless steel


### MODULE SUPPORT FRAME



**Standard version**  
Embossed metallized  
gun-metal grey



**/CR** Silver chromium plating  
When ordering put **/CR**  
after the code



**/G** Gold chromium plating  
When ordering put **/G**  
after the code

Audio and video outdoor station measurements (in mm)

	FLUSH MOUNTING		SURFACE MOUNTING	
1 MODULE	<p>Without rainshield</p>		<p>With rainshield <b>4871</b></p>	
	<p>Without rainshield</p>		<p>With rainshield <b>4891</b></p>	
2 MODULES	<p>Without rainshield</p>		<p>With rainshield <b>4872</b></p>	
	<p>Without rainshield</p>		<p>With rainshield <b>4872</b></p>	
3 MODULES (ONLY VR/KC)	<p>Without rainshield</p>		<p>With rainshield <b>4873</b></p>	
	<p>Without rainshield</p>		<p>With rainshield <b>4893</b></p>	

# SMART, MINI AND SLIM SERIES AUDIO OUTDOOR STATIONS




Finishes for SMK, ESK and MK audiokits

**FRONT PLATE**



**/A** Aluminium  
When ordering put **/A**  
after the code



**/G** Gold  
When ordering put **/G**  
after the code




**/W** White  
When ordering put **/W**  
after the code

SMK, ESK, MK and SLK audiokits outdoor station measurements (in mm)

	FLUSH MOUNTING	SURFACE MOUNTING
<b>SMK - ESK</b>	<p>Without rainshield: 95 (width), 163.5 (height), 152 (depth), 30 (mounting depth), 15 (bottom depth)</p> <p>With rainshield 371: 100 (width), 168.5 (height), 152 (depth), 30 (mounting depth), 22 (bottom depth)</p>	<p>100 (width), 168.5 (height), 40 (depth)</p>
<b>MK</b>	<p>100 (width), 170 (height), 68 (depth)</p>	<p>105 (width), 175 (height), 68 (depth)</p>
<b>SLK</b>		<p>52.5 (width), 150 (height), 25 (depth)</p>



# 6200, 6300, 6400 AND 6700 SERIES INDOOR STATIONS



6256



6286




6358



6388



<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT			
<b>HANDSET / HANDS FREE</b>	Handset		Hands free	
<b>CONNECTION</b>	6 WIRE BUS	2 WIRE BUS	6 WIRE BUS	2 WIRE BUS
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Camera recall, Door-open/Intercommunicating call, Privacy	4: Service, Privacy/Bus relay activation, Door-open/Intercommunicating call, Camera recall/Camera switch	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk
<b>LEDS</b>	2: Door open, Privacy ON		3: Door open, Privacy ON, Conversation	
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory			
<b>ADJUSTMENT</b>	Call tone volume, Hue, Contrast, Brightness		Call tone volume, Speech volume, Hue, Contrast, Brightness	
<b>PROGRAMMING</b>	Privacy duration, Number of rings, Intercommunicating call		Privacy duration, Melody type, Number of rings, Intercommunicating call	
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	62931		63931	



6458



6488



6758





6788

<b>DISPLAY</b>	4.3" Hi-Res colour LCD TFT		7" Hi-Res colour LCD TFT	
<b>HANDSET / HANDS FREE</b>	Hands free			
<b>CONNECTION</b>	6 WIRE BUS	2 WIRE BUS	6 WIRE BUS	2 WIRE BUS
<b>BUTTONS / SERVICES<sup>1</sup></b>	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk	4: Service, Privacy, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk	4: Service, Privacy/Bus relay activation/Camera switch/Call reject, Door-open/Intercommunicating call, Answer/OFF/Camera recall/Push to talk
<b>LEDS</b>	3: Door open, Privacy ON, Conversation			
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory		Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds video clips stored in MicroSD memory card	
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness			
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call			
<b>MOUNTING</b>	Surface			
<b>FINISHING</b>	Satin white			
<b>DESKTOP KIT OPT.<sup>2</sup></b>	64931		67931	

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately


# KRISTALLO® SERIES INDOOR STATIONS

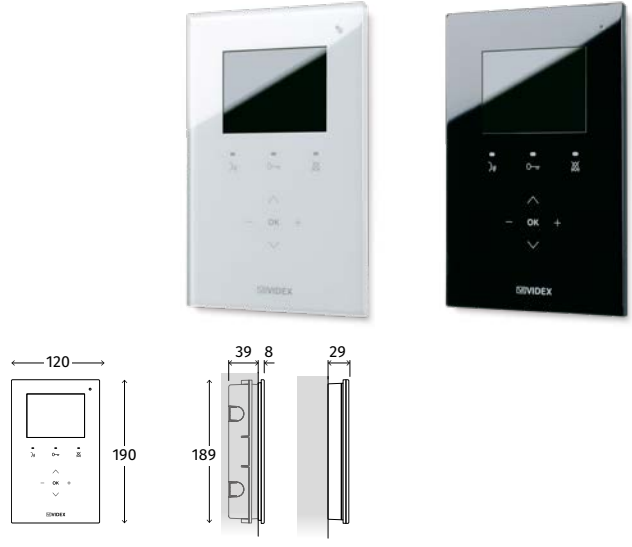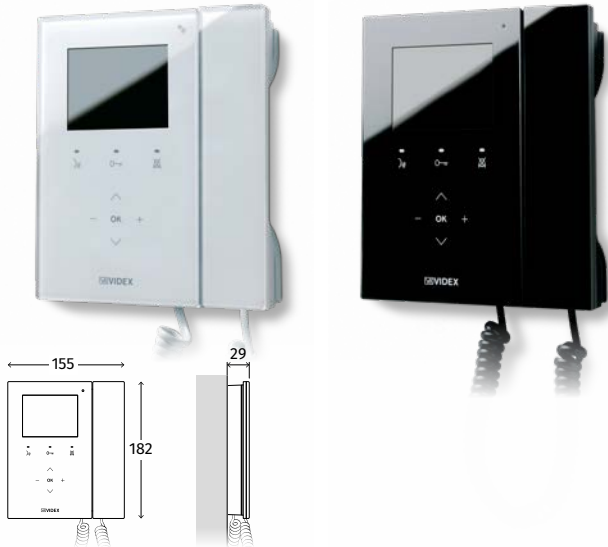

**KRV86**

**KRV88**

<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT	
<b>HANDSET / HANDS FREE</b>	Handset / Hands free	Hands free
<b>CONNECTION</b>	2 WIRE BUS	
<b>BUTTONS / SERVICES<sup>1</sup></b>	3: Answer/Camera recall/End conversation/ Push to talk, Door-open/Aux service/Intercommunicating call, Privacy/Programming menu/Call reject/Adjustment menu/Bus relay activation Menu navigation/Camera switch	
<b>LEDS</b>	3: door open, Privacy ON, Conversation	
<b>MEMORY BOARD OPT.</b>	Yes, up to 128 pictures or 66 15 seconds videoclips stored in built in memory. Ability to copy pictures/videoclips to MicroSD memory card	
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness	
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call	
<b>MOUNTING</b>	Surface	Surface Flush (require <b>KRV981<sup>2</sup></b> or <b>KRV983<sup>2</sup></b> )
<b>FINISHING</b>	<b>/W</b> White - <b>/B</b> Black	
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>KRV931</b>	Not available

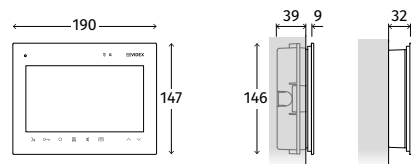

**KRV782**

<b>DISPLAY</b>	7" Hi-Res colour LCD TFT
<b>HANDSET / HANDS FREE</b>	Hands free
<b>CONNECTION</b>	2 WIRE BUS
<b>BUTTONS / SERVICES<sup>1</sup></b>	Camera recall/Answer/End conversation/ Push to talk, Intercommunicating call/Door-open, Bus relay activation, Privacy/Call reject, Melody volume/Camera switch, Speech volume adjustment, Brightness and hue adjustment
<b>LEDS</b>	2: Door open, Privacy ON
<b>MEMORY BOARD OPT.</b>	Yes, up to 100 pictures stored in built in memory or up to 4096 pictures or 512 15 seconds videoclips stored in MicroSD memory card
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Contrast, Brightness
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings, Intercommunicating call
<b>MOUNTING</b>	Surface Flush (require <b>KRV7981<sup>2</sup></b> or <b>KRV7983<sup>2</sup></b> )
<b>FINISHING</b>	<b>/W</b> White - <b>/B</b> Black
<b>DESKTOP KIT OPT.<sup>2</sup></b>	<b>KRV7931</b>

## Finishes



**/W** White  
When ordering put **/W**  
after the code




**/B** Black  
When ordering put **/B**  
after the code

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately


# 3600 AND 5000 SERIES INDOOR STATIONS

## 3600 SERIES

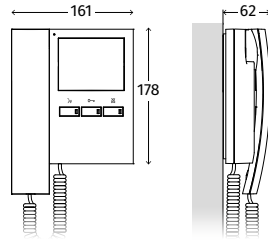

	3656	3686
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT	
<b>HANDSET / HANDS FREE</b>	Handset	
<b>CONNECTION</b>	6 WIRE BUS	2 WIRE BUS
<b>BUTTONS / SERVICES<sup>1</sup></b>	3: Camera recall, Door-open/Intercommunicating call, Privacy	3: Camera recall/Camera switch, Door-open/Dry contact relay/Intercommunicating call, Privacy/Bus relay activation
<b>LEDS</b>	3: Door open, Privacy ON, Conversation	
<b>MEMORY BOARD OPT.</b>	Not available	
<b>ADJUSTMENT</b>	Call tone volume, Hue, Brightness	Call tone volume, Hue, Contrast, Brightness
<b>PROGRAMMING</b>	Privacy duration, Number of rings	Privacy duration, Melody type, Number of rings, Intercommunicating call
<b>MOUNTING</b>	Surface	
<b>FINISHING</b>	Gloss white	
<b>DESKTOP KIT OPT.<sup>2</sup></b>	36931	

## 5000 SERIES

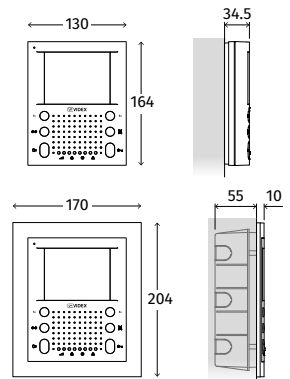

	5456
<b>DISPLAY</b>	3.5" Hi-Res colour LCD TFT
<b>HANDSET / HANDS FREE</b>	Hands free
<b>CONNECTION</b>	6 WIRE BUS
<b>BUTTONS / SERVICES<sup>1</sup></b>	6: Answer/Push to talk/OFF, Privacy, Door-open/Intercommunicating call, 3 Service buttons
<b>LEDS</b>	4: Door open, Privacy ON, Conversation, Service
<b>MEMORY BOARD OPT.</b>	Yes, up to 512 pictures stored in built in memory
<b>ADJUSTMENT</b>	Call tone volume, Speech volume, Hue, Brightness
<b>PROGRAMMING</b>	Privacy duration, Melody type, Number of rings
<b>MOUNTING</b>	Surface Flush (require 5981N <sup>2</sup> or 5983N <sup>2</sup> )
<b>FINISHING</b>	Gloss white (Standard) /CR Silver /CA Carbon Fibre Effect
<b>DESKTOP KIT OPT.<sup>2</sup></b>	5931


### Finishes



Gloss white (Standard)



/CR Silver  
When ordering put /CR after the code



/CA Carbon Fibre Effect  
When ordering put /CA after the code

<sup>1</sup> A button can have multiple functions  
<sup>2</sup> To be ordered separately

# Terms and conditions of sale

## 1) DEFINITIONS

In this document the following words shall have the following meanings:

- a. "Buyer" means the organisation or person who buys Goods;
- b. "Goods" means the items to be supplied to the Buyer by the Seller; Videx Electronics S.p.A. will be hereafter called "Videx".

## 2) GENERAL CONDITIONS

Any variation to these Terms and Conditions (including any special terms and conditions agreed between the parties) shall be inapplicable unless agreed in writing by Videx.

## 3) ORDERS

Any order sent to Videx implies the Buyer's acceptance of all the conditions listed into this document.

Purchases are finalized when the Buyer receives the order confirmation from Videx.

After this confirmation, the order cannot be cancelled unless Videx explicitly agrees in writing.

## 4) PRICES

Price list is to be considered variable as it is subject to variations in production costs which are outside of the control of Videx.

Unless otherwise agreed in writing, prices shall be considered ex-works.

## 5) RETENTION OF TITLE

Title to the Goods shall not pass to the Buyer until Videx has been paid in full for the Goods.

## 6) RETURNED GOODS

Returned Goods will not be authorized unless agreed in writing by Videx. Authorized Goods will be accepted only if intact and in their original packaging. Goods not included in the price lists in force will not be accepted.

In case of accepted returned Goods a credit note, corresponding to the invoiced amount reduced by 30%, will be issued.

## 7) LIABILITY

- a. Videx will not be held responsible for damages arising from incorrect installations which do not comply with the specifications provided or for installations carried out by third parties, or for works carried out by third parties on behalf of the Buyer;
- b. Videx will make good, by repair or by supply of a replacement, defects which, under proper use, appear in the Goods within a period of 12 months after the Goods been sold and arise solely from faulty design, materials or workmanships; always provided that the defective parts have been acknowledged and so declared by Videx;
- c. Videx does not acknowledge any compensation for direct or indirect damages;
- d. All goods must be returned to Videx at Buyer's own expenses, until such time as these are tested Videx admits no liability for their condition;
- e. Videx admits no liabilities for defective parts caused by wear and tear;
- f. All Goods returned for repair must be accompanied by a note in writing stating the nature of the defect claimed, the date of purchase, the invoice number and should be clearly marked with the returning purchaser's full address;
- g. Any returned Goods claimed to be faulty by the Buyer and consequently tested and found to be working correctly by Videx, will be returned to the Buyer and a cost will be charged accordingly.

## 8) PAYMENT

Unless agreed in writing by Videx, the following general conditions apply:

- a. Payment Terms and Conditions will be specified on the invoice;
- b. Interest rates as per the banking conditions effective at the time will be charged on top of overdue payments;

## 9) GOVERNING LAW AND JURISDICTION

This Agreement shall be governed by and construed in accordance with the laws of the Republic of Italy. All the disputes arising out of or in connection with this Agreement shall be submitted to the exclusive jurisdiction of the Courts of Fermo (Italy).











WWW.VIDEX.IT

**VIDEX ELECTRONICS S.P.A.**

Via del Lavoro, 1 - 63846 Monte Giberto (FM) Italy

Tel: (+39) 0734 631669 - Fax: (+39) 0734 632475

[www.videx.it](http://www.videx.it) - [info@videx.it](mailto:info@videx.it)

[facebook.com/videx.electronics](https://www.facebook.com/videx.electronics)



*Main UK office:*

**VIDEX SECURITY LTD**

1 Osprey Trinity Park  
Trinity Way  
LONDON E4 8TD  
Phone: (+44) 0870 300 1240  
Fax: (+44) 020 8523 5825  
[www.videxuk.com](http://www.videxuk.com)  
[marketing@videxuk.com](mailto:marketing@videxuk.com)



*Northern UK office:*

**VIDEX SECURITY LTD**

Unit 4-7  
Chillingham Industrial Estate  
Chapman Street  
NEWCASTLE UPON TYNE - NE6 2XX  
Tech Line: (+44) 0191 224 3174  
Phone: (+44) 0870 300 1240  
Fax: (+44) 0191 224 1559



*Greece office:*

**VIDEX HELLAS Electronics**

48 Filolaou Str.  
11633 ATHENS  
Phone: (+30) 210 7521028  
(+30) 210 7521998  
Fax: (+30) 210 7560712  
[www.videx.gr](http://www.videx.gr)  
[videx@videx.gr](mailto:videx@videx.gr)



*Danish office:*

**VIDEX DANMARK**

Hammershusgade 15  
DK-2100 COPENHAGEN  
Phone: (+45) 39 29 80 00  
Fax: (+45) 39 27 77 75  
[www.videx.dk](http://www.videx.dk)  
[videx@videx.dk](mailto:videx@videx.dk)



*Benelux office:*

**NESTOR COMPANY NV**

E3 laan, 93  
B-9800 Deinze  
Phone: (+32) 9 380 40 20  
Fax: (+32) 9 380 40 25  
[www.videx.be](http://www.videx.be)  
[info@videx.be](mailto:info@videx.be)



*Dutch office:*

**NESTOR COMPANY BV**

Business Center Twente (BCT)  
Grotestraat, 64  
NL-7622 GM Borne  
[www.videxintercom.nl](http://www.videxintercom.nl)  
[info@videxintercom.nl](mailto:info@videxintercom.nl)