


TM-10 Conference Table Microphone Adapter

Round Table Discussions • Business Meetings & Interviews • Small or Large Conference Table

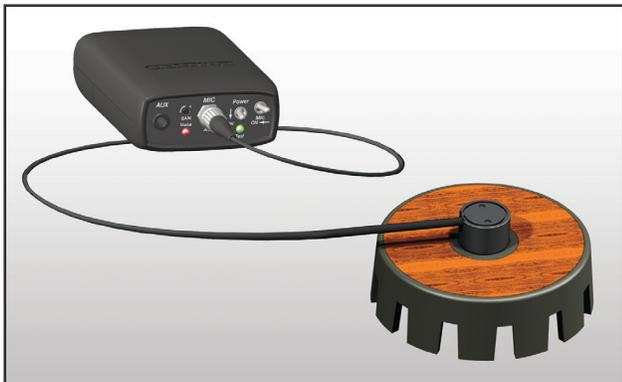

The TM-10 conference table microphone adapter adds a whole new dimension to the versatile AT-216 personal assistive listening system. Simply inserting the lapel microphone into the TM-10 transforms the microphone into a table-top conference microphone emphasizing the frequencies that enhance speech clarity.

Using the TM-10 allows the microphone to function as an acoustically tailored, “boundary-type” microphone by using the reflective surface of a table or desk as the boundary area that the microphone picks up. This allows the user to hear everyone sitting around the table eliminating the need to pass around a microphone.



Remove the windscreen and tie-clip from the CM-183 lapel microphone and insert the microphone into the receptacle on the TM-10 adapter.

- *Enhances Speech Clarity*
- *Wide Dynamic Range*
- *High Magnetic Hum Rejection*

Technical Specifications:

Frequency Response: 100 to 10,000 Hz

Polar Pattern: Hemispherical over boundary

Output Impedance: 1 k ohms nominal

Sensitivity: -28 dB at 1 kHz, ref. 1volt

Equivalent Output Noise: 23.5 dB (A-weighted)


Max SPL (1 kHz): 128 dB with 10 k load

Signal-to-Noise Ratio: 70.5 dB

Dimension: 2 in. diameter (50.8 mm) x .640 in. high (16.25 mm)

Weight: 1.33 oz (38 grams) with microphone

Acoustical Preemphasis Gain Curve:

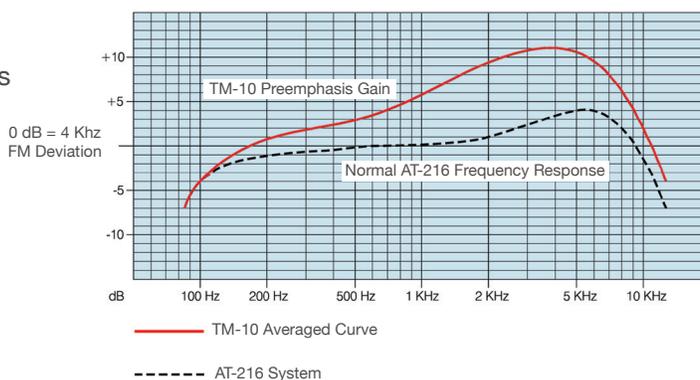

COMTEK[®]
First Quality In Wireless Sound

P: 800-496-3463

www.comtek.com