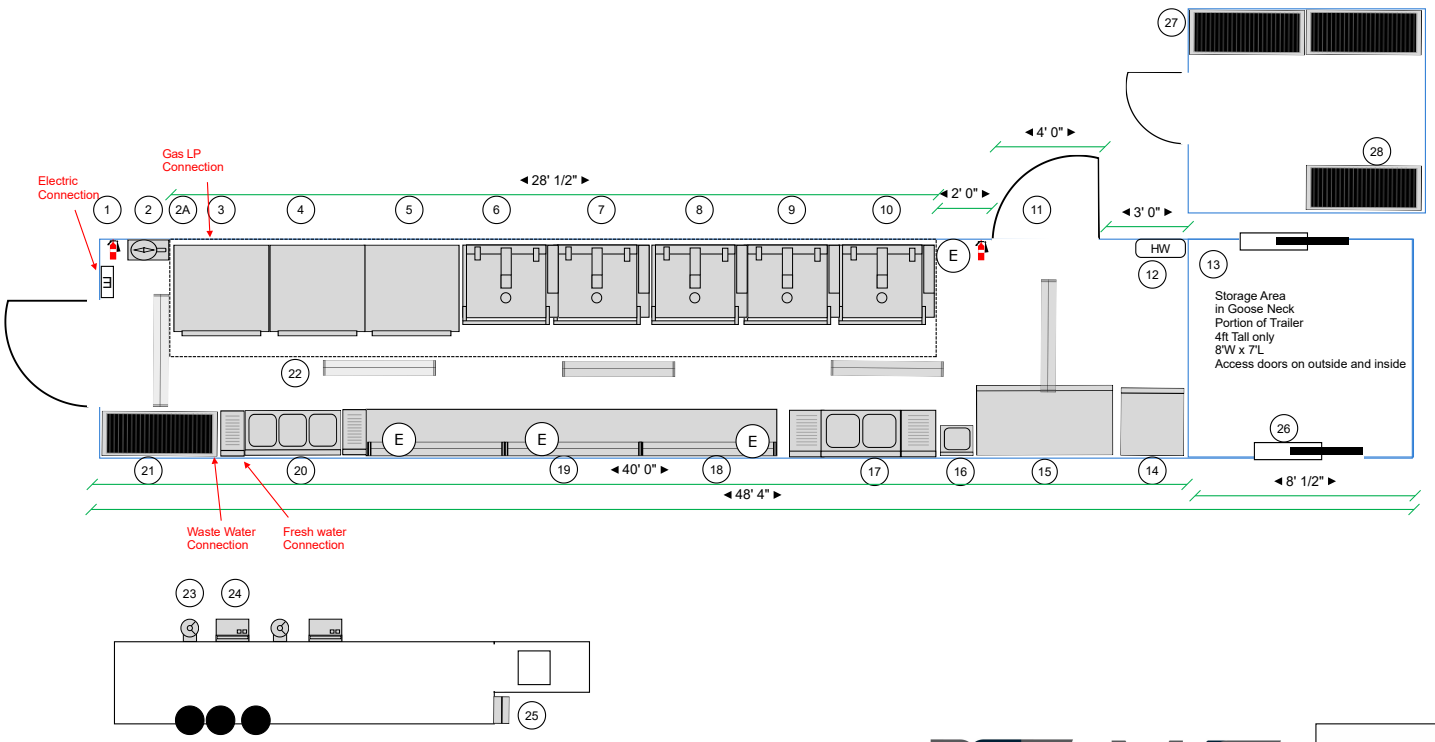

1. Electric Panel
2. Fire Suppression System
2A. 28' Exhaust Hood with Suppression / Pull Station
3. Double Stack Convection Oven LP
4. Double Stack Convection Oven LP
5. Double Stack Convection Oven LP
6. 40G Tilt Skillet
7. 40G Tilt Skillet
8. 40G Tilt Skillet
9. 40G Tilt Skillet
10. 40G Tilt Skillet
11. 48" Door
12. Water Heater LP
13. 8'x8' Dry Storage
14. 1 Door Freezer
15. 2 Door Freezer
16.1 Basin Wash Sink
17. 2 Basin Prep Sink
18. (3) 5' SS Prep Table with Undershelf
19. (3) 5' Overhead Wall Shelving
20. 3 Basin Sink with wash wand/faucet
21. Wire Rack
22.Enclosed 4' Lighting
23. Fresh/Return Air Fans
24. Exhaust Fans
26. HVAC Split System Ducted
27. 8'x8' Walk in Refrigeration
28. (3) Wire Racks

Fire Extinguisher

110v Duplex 15A Outlet (E)

48' Kitchen Trailer
208v 200Amp 1Phase Hardwire
3/4" 45PSI Fresh Water Bib
3-4" Waste Water Connection
950,000BTUs LP 3/4"-1/2" Gas Connection

*Drawing for informational purposes only. Not to Scale.

RSE RENTAL SOLUTIONS & EVENTS

MKS MOBILE KITCHEN SOLUTIONS

Rental Solutions *Mobile Kitchen Solutions* *48ft Goose Neck Kitchen Trailer*	DRAWN BY		DATE
	CHECKED	SCALE	SHEET NO.