


PRW Weighing Scales

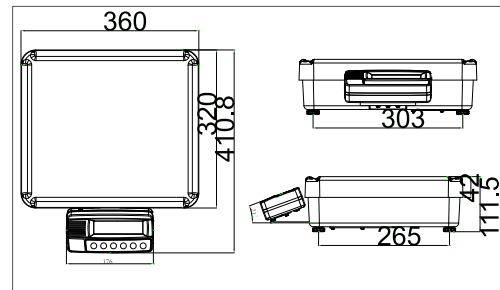

Features

Easy to move: battery operation, compact, light weight construction, it is suitable for the use in several locations (production, warehouse, logistic department etc.)

Easy to clean: stainless steel pan, Its smooth surfaces make it simple to clean

Easy to read: 6 digits 22mm digits high LCD display, with white color LED backlight

High precision: external resolution up to 1/60,000

Full function: unit change, accumulation, checkweighing

Check weighing: a visual and sound signal helps with portioning, dispensing or grading

Technical Data

Display: LCD display, digit height 22mm, with white LED backlight

Capacities: 6kg~60kg

Pan size: 320×360mm

Housing: ABS plastic indicator

Net weight: approx. 9kg

Power: AC adapter (100~240VAC/12V500mA),

Ni-MH battery (1.2V/2000mAh x 6), battery

Operation time: 40 hours (without backlight)

Operation temp.: -10°C~+40°C

Accessories

- RS-232 interface can connect to PC or printer.
- RS-232 cable for PC
- RS-232 cable for printer
- Label printer
- Mini printer

Standard



Factory Option



Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Minimal load [Min]g
PRW-6K	6	0.2	-	4
PRW-15K	15	0.5	-	10
PRW-30K	30	1	-	20
PRW-60K	60	2	-	40
PRW+-6K	6	0.1	-	2
PRW+-15K	15	0.2	-	4
PRW+-30K	30	0.5	-	10
PRW+-60K	60	1	-	20
PRW-3K-M	3	1	1	20
PRW-6K-M	6	2	2	40
PRW-15K-M	15	5	5	100
PRW-30K-M	30	10	10	200
PRW-6K-MR	3 6	1 2	1 2	20
PRW-15K-MR	6 15	2 5	2 5	40
PRW-30K-MR	15 30	5 10	5 10	100