



**MARCHESAN**

# ***6010 GAICR EHD***

WHEEL OFFSET DISK HARROW



WORKING WIDTH  
8 TO 14 FT.

***THE BRAND OF THE LAND***



**MARCHESAN**

The model **6010 GAICR EHD** is specially designed to offer maximum working width and weight per blade for medium horsepower tractors.

Ideal for soil preparation, primary tillage in grassland and leveling of large crop areas after harvesting.



All models have hydraulic controlled depth gauge and transport wheels, which make them more maneuverable and easier to transport to other fields.


### STANDARD FEATURES:

- Welded and rugged tubular steel frame and gang carriers.
- Stabilizer bar for front and rear disc gangs leveling.
- Disc gang angle adjusted mechanically.
- Heat treated boron steel disc blades, notched front and rear.
- Adjustable drawbar - able to offset the machine.
- Hydraulic controlled depth gauge and transport wheels.
- Double acting hydraulic cylinder with hoses and quick couplers.
- Rugged 2.1/8" round, heat-treated steel alloy disc gang axles.
- Cast iron disc spacer spools.
- Heavy duty disc blade scrapers with replaceable paddles.
- Tatu oil bath bearing assemblies with tapered roller bearings, duo-cone seals and stone guards.
- Recommended two single 11L15 - 12 ply rib implement tires for 19 and 23 blades. (Tires are not included).
- Recommended two dual 11L15 - 12 ply rib implement tires for 27 to 31 blades. (Tires are not included).
- Furrow filler blade standard.

### RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

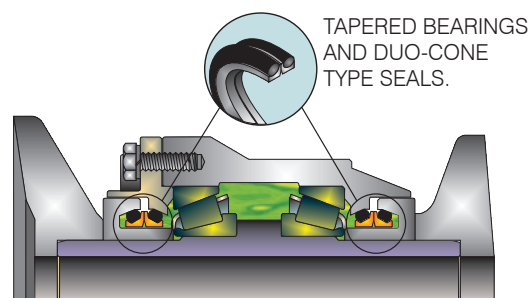

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.

### SPECIFICATIONS:

Model	Number of Disc	Working Width ft. in. (mm)	Disc Blades		Weight per Disc lbs (Kg)	Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing			
6010 GAICR EHD	19	7' 11" (2,438)	26"x6.0mm,		286 (129)	5,441 (2,468)	110 - 120
	23	10' (3,048)	26"x7.5mm,	10.5/8"	277 (125)	6,369 (2,889)	140 - 150
	27	12' (3,658)	or	(270mm)	259 (117)	6,999 (3,175)	150 - 160
	31	13' 11" (4,267)	28"x7.5mm,		240 (109)	7,451 (3,380)	170 - 180

\* Approx. net weight with 26" x 7.5mm disc blades.

> Depth of cut: 4.3/4" to 7.7/8" (120 to 200mm).

MARCHESAN S.A. reserves the right to perfect or alter the characteristics of its products, without the obligation to do so with those already marketed and without giving prior knowledge. The photos and drawings are merely illustrative. 06/2019 - Rev. 01

### MARCHESAN IMPLEMENTOS E MÁQUINAS AGRÍCOLAS TATU S.A.

Av. Marchesan, 1979 - CEP 15994-900 - Matão-SP-Brasil  
Phone: +55 16 3382.8282 - Fax (Sales): 3382.8297  
CNPJ.: 52.311.289/0001-63 - Inscr. Est.: 441.000.151.114



**THE BRAND OF THE LAND**

[www.marchesan.com.br](http://www.marchesan.com.br) email: [tatu@marchesan.com.br](mailto:tatu@marchesan.com.br)