



MARCHESAN

8013 GAPCR HD

HEAVY DUTY WHEEL OFFSET DISK HARROW



WORKING WIDTH 12 TO 23 FT.

THE BRAND OF THE LAND



MARCHESAN



The model **8013 GAPCR HD** is specially designed for tough plowing jobs found in newly cleared forest areas or heavy sugar cane stubble left after the last crop. It performs well in soil preparation applications and leveling of large areas after harvest, breaking clods, eliminating weed seedlings and incorporating trash into the soil profile and to meet the extreme conditions in construction such as clear land, build roads and dams, reclaim mine sites and prepare land for reforestation.


Standard Features:

- TATU oil bath bearings assemblies with tapered roller blade and duo-cone seals.
- 1/2" x 6" x 9" rectangular main frame, 1/2" x 5" x 10" gang carriers, reinforced through two-welded "U" profile.
- 2.1/2" round heat treated alloy steel gang axles.
- Casting spacer spools.
- Heat treated boron steel disc blades, notched front and rear.
- Heavy duty disc blade scrapers.
- Recommended (wheels and tires are not included):
- - Two dual 12.5Lx15"-16 ply for 8013 GAPCR HD (8 bolts hub).
- Stabilizer bar front and rear disc gangs leveling.
- Perforated offset bar to allow lateral adjustments under varying draft conditions.
- Box type construction drawbar with standard draw bar plates.
- Hydraulic controlled depth gauge through rod stops.
- Wheels hubs with two tapered roller bearings on each hub to protect against dust and moisture.
- Adjustable gang axles up to 42 degrees.

RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

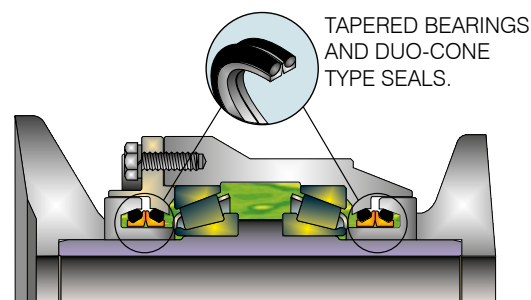

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.

Specifications:

Model	Number of Disc Blades	Working Width ft. in. (mm)		Disc Blades		Weight per Disc lbs (Kg)	Approx. Net Weight* lbs (Kg)		Tractor Draw Bar Horse Power
				Dimensions	Spacing				
8013 GAPCR HD	25	12' 8"	(3,865)			503 (228)	12,566 (5,700)	250 - 280	
	29	14' 11"	(4,545)			503 (228)	14,572 (6,610)	280 - 310	
	31	16' 0"	(4,885)	32"x9mm		502 (227)	15,542 (7,050)	310 - 330	
	33	17' 2"	(5,225)	34"x9mm,	13.3/8"	503 (228)	16,578 (7,520)	330 - 340	
	35	18' 3"	(5,565)	or	(340mm)	503 (228)	17,593 (7,980)	340 - 360	
	37	19' 4"	(5,905)	36"x9mm		502 (227)	18,585 (8,430)	380 - 400	
	39	20' 4"	(6,245)			677 (307)	26,425 (11,990)	420 - 440	
	41	21' 6"	(6,585)			661 (300)	27,098 (12,295)	460 - 480	
8013 GAPCR HD - Folding	45	23' 6"	(7,210)			630 (286)	28,380 (12,877)	510 - 560	

* Approx. Net Weight: 8013 GAPCR HD with 34"x9mm.

** Please note that the tractor draw bar horse power are suggested ranges and vary according to soil conditions and weight added to harrow.

MARCHESAN S.A. reserves the right to perfect or alter the characteristics of its products, without the obligation to do so with those already marketed and without giving prior knowledge. The photos and drawings are merely illustrative. 01/2019 - Rev. 06

MARCHESAN IMPLEMENTOS E MÁQUINAS AGRÍCOLAS TATU S.A.

Av. Marchesan, 1979 - CEP 15994-900 - Matão-SP-Brasil
 Phone: +55 16 3382.8282 - Fax (Sales): 3382.8297
 CNPJ.: 52.311.289/0001-63 - Inscr. Est.: 441.000.151.114



www.marchesan.com.br email: tatu@marchesan.com.br