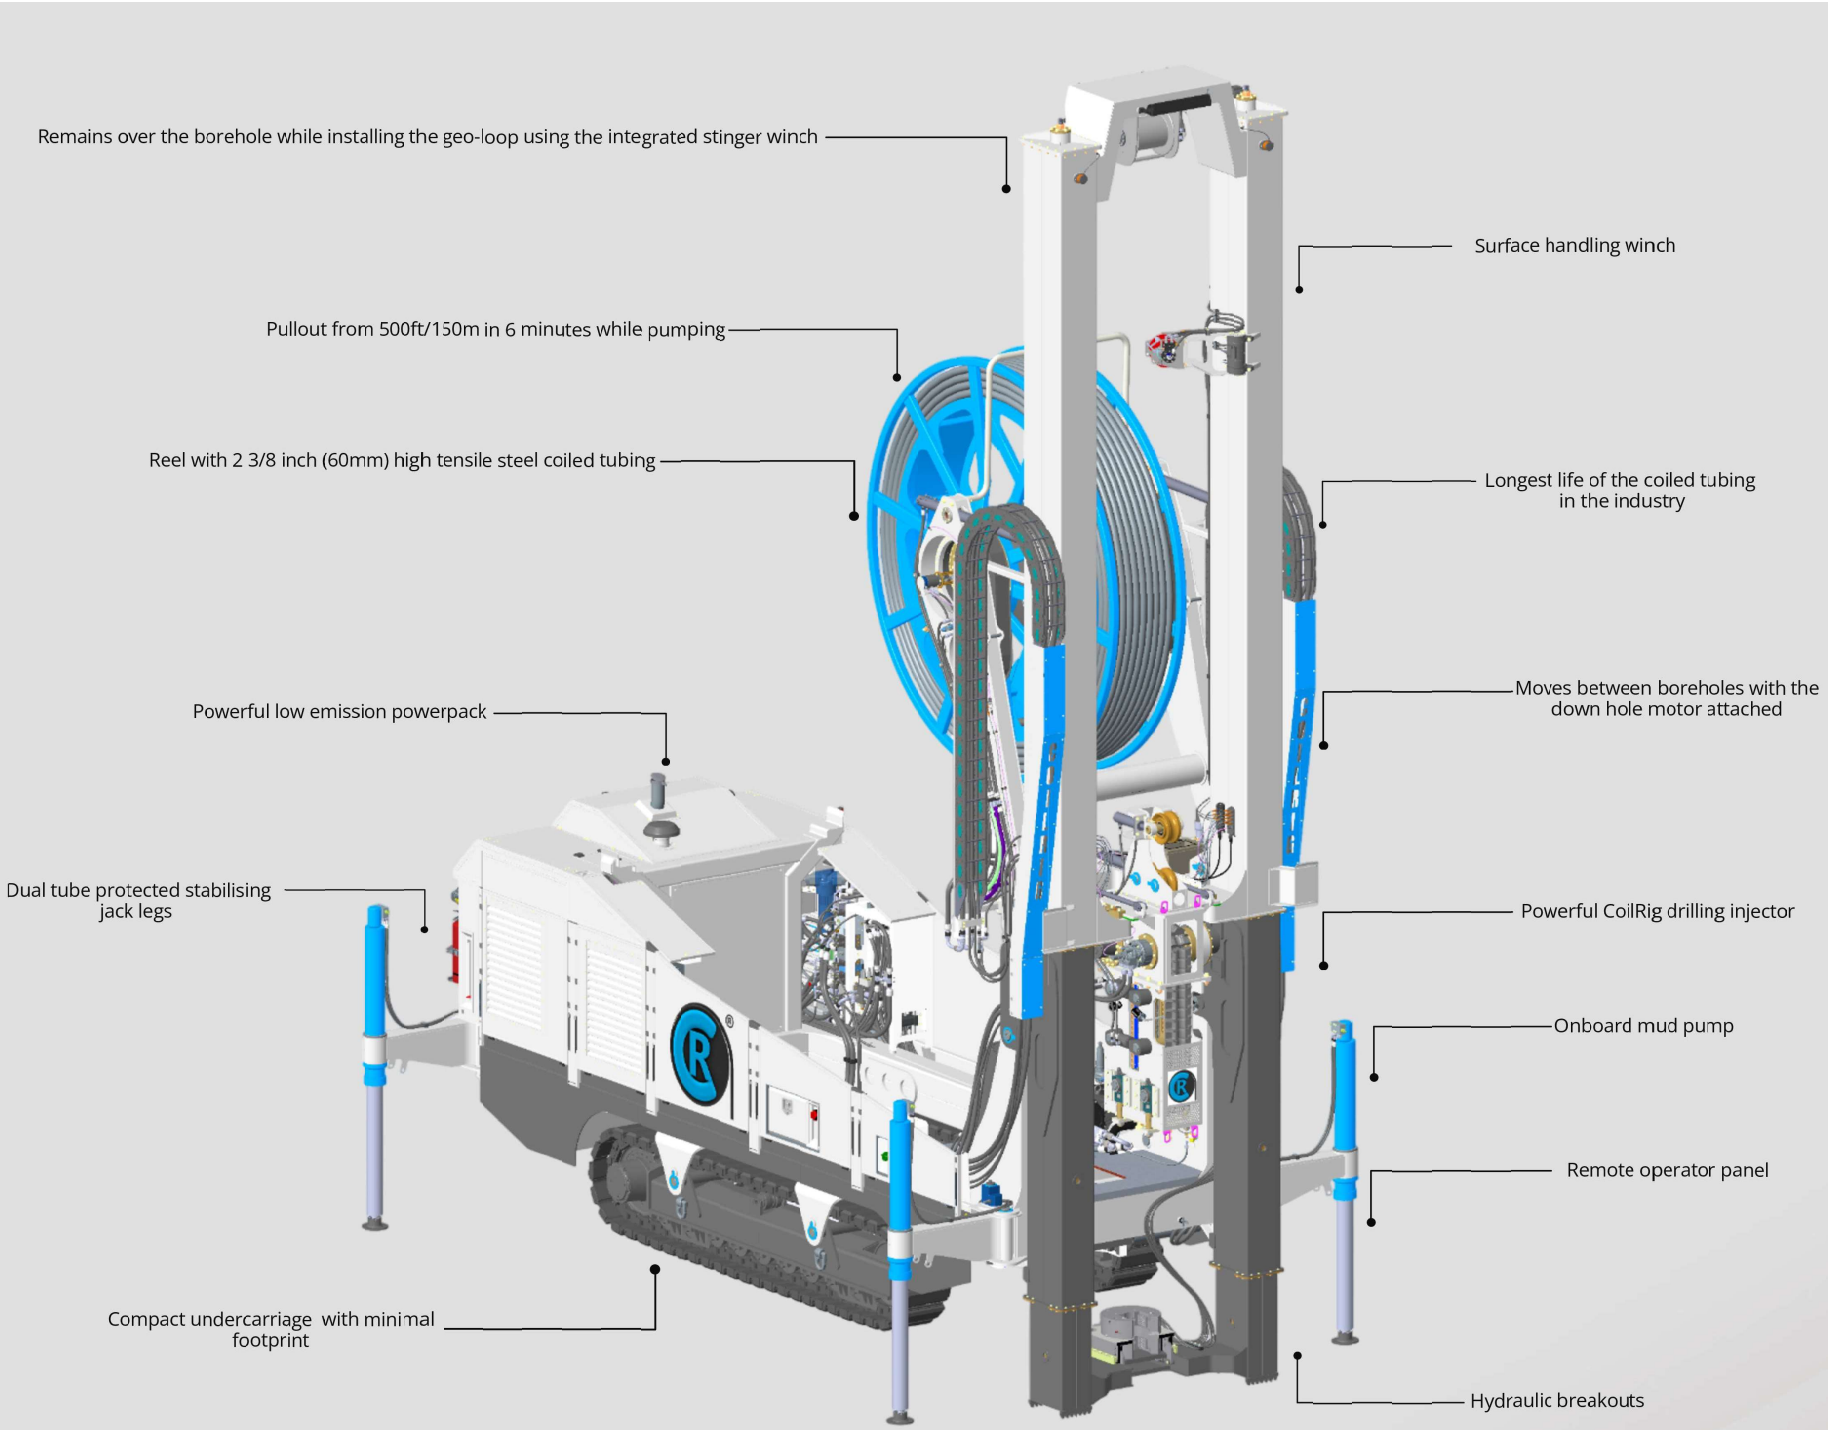
Remains over the borehole while installing the geo-loop using the integrated stinger winch
Surface handling winch
Pullout from 500ft/150m in 6 minutes while pumping
Reel with 2 3/8 inch (60mm) high tensile steel coiled tubing
Longest life of the coiled tubing in the industry
Powerful low emission powerpack
Moves between boreholes with the down hole motor attached
Dual tube protected stabilising jack legs
Powerful CoilRig drilling injector
Onboard mud pump
Remote operator panel
Compact undercarriage with minimal footprint
Hydraulic breakouts