

SOKKIA

MADE TO FIT YOUR WORLD.

NET AXII Series

3D Monitoring Stations



Ultra-high-precision Distance Measurement

These fully robotic monitoring stations offer a superior level of performance compared to conventional systems that simply lock on to the nearest targets. The NET AXII series excels at precision-intensive tasks such as monitoring, bridge construction, and other highly detailed engineering projects.

- Precise angle accuracies 0.5" (NET05 AXII) / 1" (NET1 AXII)
- 1" Auto-pointing accuracy
- Remote control through on-line PC
- Exclusive reflector prescan technology
- Enforced durability for long-term deformation / monitoring applications

For Monitoring

The NET AXII series provides superior measuring precision for high-precision monitoring applications and can be utilized to configure a high-precision monitoring system.

For Industrial Measurement

Achieve sub-millimeter accuracy using the NET05 AXII and reflective sheet targets. It's excellent for measuring the shape and alignment of large-scale structures, such as various plants and bridges, as well as for precise measurement of ships, railroad cars and airplanes.

For First Order Survey

You get high-precision angle accuracy (NET05 AXII: 0.5", NET1 AXII: 1"), which can be applied for a wide range of precise measurements. The high-precision 3D station is equipped with an automatic tracking system and can be configured by remote control.



Ultra-high-precision Distance Measurement

NET05 AXII

Using reflective sheet targets, the NET05 AXII provides sub-millimeter accuracy (0.5 mm + 1 ppm) in a range of up to 200 m.

NET1 AXII


The reflectorless measurement range of the NET1 AXII model is doubled to 400 m (1,310 ft.) when using a Kodak white side (90% reflective).

Advanced Accuracy

Our IACS (Independent Angle Calibration System) technology provides “best-in-class” angle accuracy. With a biaxial level compensation mechanism that has a wide adjusting range of ± 6 feet, which is twice as wide as the previous models. This enables highly accurate measuring performance.

The auto-pointing accuracy* with the standard prism is 1" (1 mm at 200 m), and 4" (1 mm at 50 m) with a reflective sheet.

**Auto-pointing accuracy is verified using the methods specified by ISO 17123-3.*

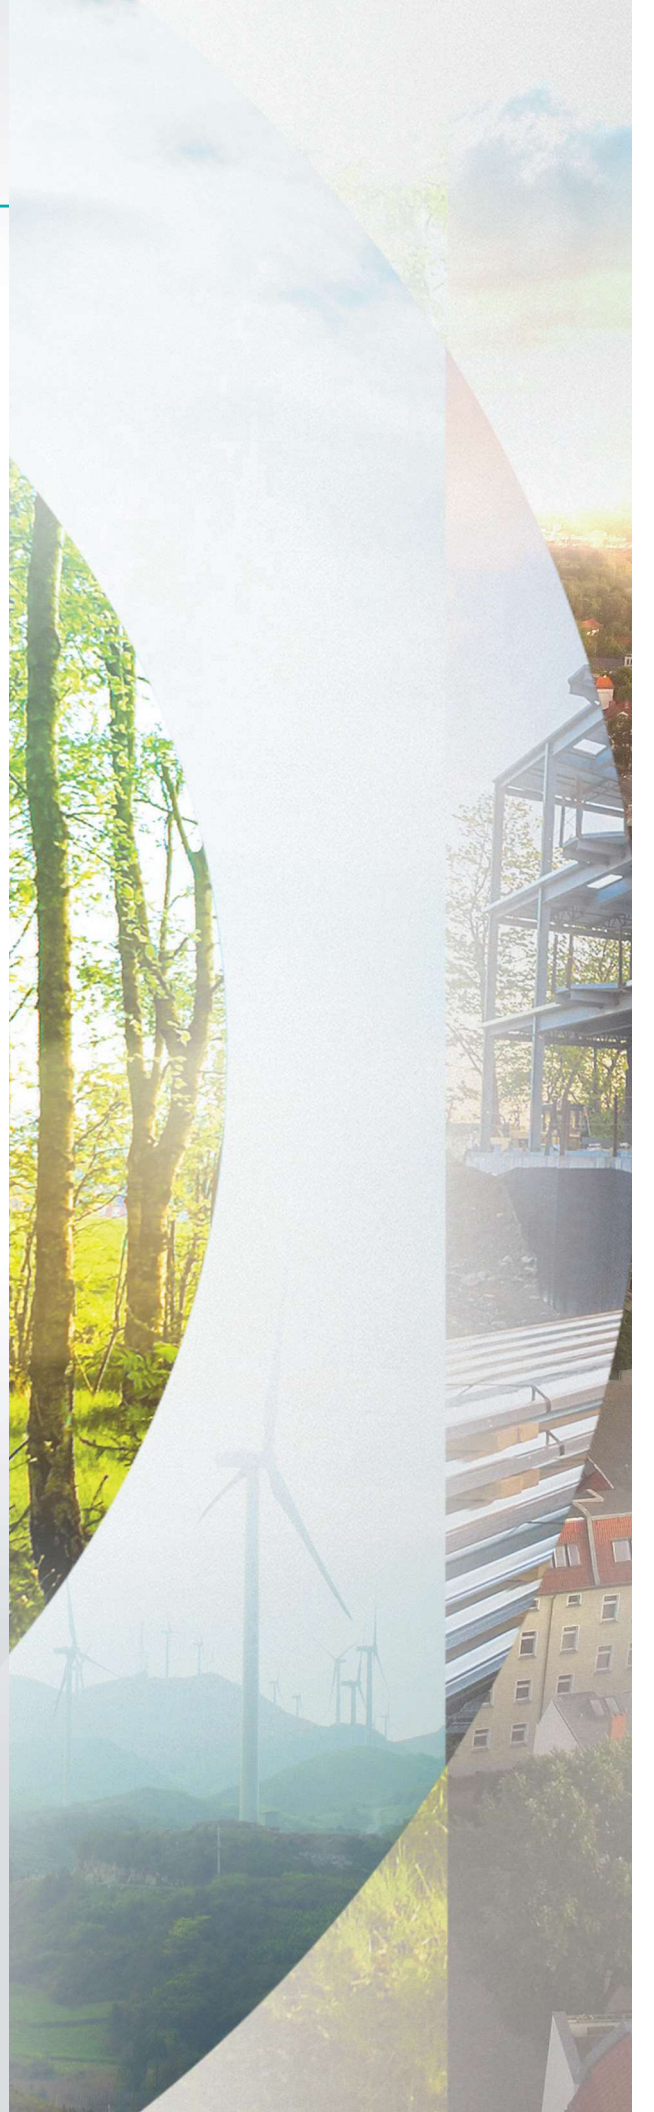

NET AXII Series

3D Monitoring Stations

Advanced Auto-pointing Algorithm for Multiple Prisms*

The NET series incorporates an advanced auto-pointing algorithm* optimized for monitoring applications. Your instrument automatically sights the prism closest to the telescope center regardless of the distance. This works even if multiple prisms or other reflective objects are in the field-of-view. The feature dramatically enhances the reliability in periodic monitoring of predetermined prism locations.

**With a regular auto-pointing algorithm, the instrument normally sights the nearest target with the strongest reflection.*

Specifications

MODEL	NET05 AXII	NET1 AXII
Telescope		
Magnification / Resolving power	30x / 2.5"	
Objective aperture: 45 mm (1.8 in.) (50 mm (2.0 in.) for EDM), Image: Erect, Field of view: 1°30' (26 m / 1,000 m), Minimum focus: 1.3 m (4.3 ft.)		
Angle Measurement		
Display Resolution (selectable)	0.1" / 0.5" (0.00002 / 0.0001 gon, 0.0005 / 0.002 mil)	
Accuracy (ISO 17123-3:2001)	0.5"	1"
Dual-axis compensator/collimation compensation	Dual-axis liquid tilt sensor, working range: ±6' / Collimation compensation available	
IACS (Independent Angle Calibration System)	Provided	
Distance Measurement		
Laser output ¹	Reflectorless mode	Class 3R / Prism / sheet mode: Class 1
Measuring range (under good conditions ²)	One prism ³	1.3 to 3,500 m (4.3 to 11,480 ft.)
	Reflective sheet R550N-R ⁴	1.3 to 200 m (4.3 to 640 ft.)
	Reflectorless ⁵	0.5 to 100 m (1.64 to 320 ft.) 0.5 to 400 m (1.64 to 1,310 ft.)
Minimum display	0.00001 m / 0.0001 m (0.0001 ft. / 0.001 ft., 1/64 in. / 1/16 in.)	0.00001 m / 0.0001 m (0.0001 ft. / 0.001 ft., 1/64 in. / 1/16 in.)
Accuracy ² (ISO 17123-4:2001) (D=measuring distance in mm)	Prism ³	(0.8 + 1 ppm x D) mm
	Reflective sheet ⁴	(1 + 1 ppm x D) mm
	Reflectorless ⁵	(1 + 1 ppm x D) mm (2 + 1 ppm x D) mm ⁶
Measuring time (Fine mode) ⁷	0.9s (initial 1.5s)	
Auto-Collimating		
Working range (under average conditions ⁸)	One prism ³	1.3 to 1,000 m (4.3 to 3,280 ft.)
	Reflective sheet R550N-R ⁹	5 to 50 m (16 to 160 ft.)
Sighting accuracy (ISO 17123-3)	Prism ³	1" (1 mm at 200 m)
	Reflective sheet ⁹	4" (1 mm at 50 m)
OS, Interface and Data Management		
Operating system	Windows [®] Compact 7	
Display ¹⁰	3.5", transmissive TFT QVGA color LCD with LED backlight, Touch screen, Automatic brightness control	
Keyboard ¹⁰	25 keys with backlight	
Trigger key	On right of instrument support	
Data storage	Internal: 500 MB (includes memory for program files) / External: USB flash memory up to 8 GB	
Interface	Serial RS-232C, USB 2.0 (Type A / mini B)	
Bluetooth ^{®11}	Bluetooth Class 1, Ver.2.1+EDR, Operating range: up to 600 m (1,960 ft.) ¹²	
General		
Target searchlight	LED (white), Blink / On, selectable	
Laser pointer	Coaxial red laser using EDM beam, ON / OFF, selectable	
Levels	Graphic: 6' (Inner Circle) / Circular level: 10' / 2 mm	
Optical plummet	Magnification: 3x, Minimum focus: 0.3 m (11.8 in.) from tribrach bottom	
Dust and water protection / operating temperature	IP65 (IEC 60529:2001) / -20°C to 50°C (-4 to 122°F)	
Size with handle ¹⁰ (w x d x h)	Single face: 230 x 196 x 393 mm / Dual face: 230 x 207 x 393 mm	
Weight with battery and tribrach ¹⁰	Single face: 6.8 kg (15.0 lb) / Dual face: 7.0 kg (15.4 lb)	
Motor type / rotation speed	DC motor drive / 85°/s	
Power supply		
BDC70 standard battery	7.2V, 5.2Ah / Li-ion rechargeable battery	
Operating time (20°C) ¹³	Approx. 4 hours ⁵	
External battery (option)	BDC60: approx.7 hours / BDC61: approx.14.5 hours	

¹IEC60825-1:Ed.2.0:2007 / FDA CDRH 21 CFR Part 1040.10 and 11. ²Good conditions: No haze, visibility about 40km (25 miles), overcast, no scintillation. ³Face the prism to the instrument during the measurement with the distance at 10 m or less. ⁴Face the reflective sheet target to the instrument. ⁵With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions. ⁶Measuring range: 0.5 to 200 m. ⁷Fastest time under good atmospheric conditions⁸, no compensation, EDM ALC at appropriate setting, slope distance. ⁸Average conditions: Slight haze, visibility about 20 km (12 miles), sunny periods, weak scintillation. ⁹Figures when the Auto Pointing beam strikes within 15" of the reflective sheet target. ¹⁰Control panel and keyboard location may vary depending on region or model. ¹¹Usage approval of Bluetooth wireless technology varies according to country. Please consult your local office or representative in advance. ¹²Paired with RC-PRS, with instrument height to be more than 1.5 m, no obstacles (like building structures, trees or vehicles) causing interrupting/reflecting radio wave, few sources of radio emissions/interference in the near vicinity of the instrument, no rain. ¹³Fine distance measurement (single) using Auto Pointing, repeated every 30 seconds.

- Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license. Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

SOKKIA

sokkia.com

Specifications subject to change without notice.
© 2022, Topcon Positioning Systems, Inc.
All rights reserved. SOK-1002 D 4/22

Your local Authorized Dealer is: