

SIMRAD

NSS

Operator Manual

ENGLISH



Preface

As Navico is continuously improving this product, we retain the right to make changes to the product at any time which may not be reflected in this version of the manual. Please contact your nearest distributor if you require any further assistance.

It is the owner's sole responsibility to install and use the instrument and transducers in a manner that will not cause accidents, personal injury or property damage. The user of this product is solely responsible for observing safe boating practices.

NAVICO HOLDING AS AND ITS SUBSIDIARIES, BRANCHES AND AFFILIATES DISCLAIM ALL LIABILITY FOR ANY USE OF THIS PRODUCT IN A WAY THAT MAY CAUSE ACCIDENTS, DAMAGE OR THAT MAY VIOLATE THE LAW.

Governing Language: This statement, any instruction manuals, user guides and other information relating to the product (Documentation) may be translated to, or has been translated from, another language (Translation). In the event of any conflict between any Translation of the Documentation, the English language version of the Documentation will be the official version of the Documentation.

This manual represents the product as at the time of printing. Navico Holding AS and its subsidiaries, branches and affiliates reserve the right to make changes to specifications without notice.

Copyright

Copyright © 2011 Navico Holding AS.

Warranty

The warranty card is supplied as a separate document.

In case of any queries, refer to the brand web site of your display or system:

www.simrad-yachting.com

Declarations and conformance

This equipment is intended for use in international waters as well as coastal sea areas administered by countries of the E.U. and E.E.A. For more information refer to the separate NSS Installation manual.

About this manual

This manual is a reference guide for operating the Simrad NSS systems. It assumes that all equipment is installed and configured, and that the system is ready to use.

The manual assumes that the user has basic knowledge of navigation, nautical terminology and practices.

The manual does not cover basic background information about how equipment such as radars, echo sounders and AIS work. Such information is available from our web site: www.simrad-yachting.com/en/Support/Library/.


Important text that requires special attention from the reader is emphasized as follows:

→ **Note:** Used to draw the reader's attention to a comment or some important information.

⚠ Warning: Used when it is necessary to warn personnel that they should proceed carefully to prevent risk of injury and/or damage to equipment/personnel.

The software

This manual is written for Simrad NSS Release to Market 1 (RTM1). Please check web site for details on release version.

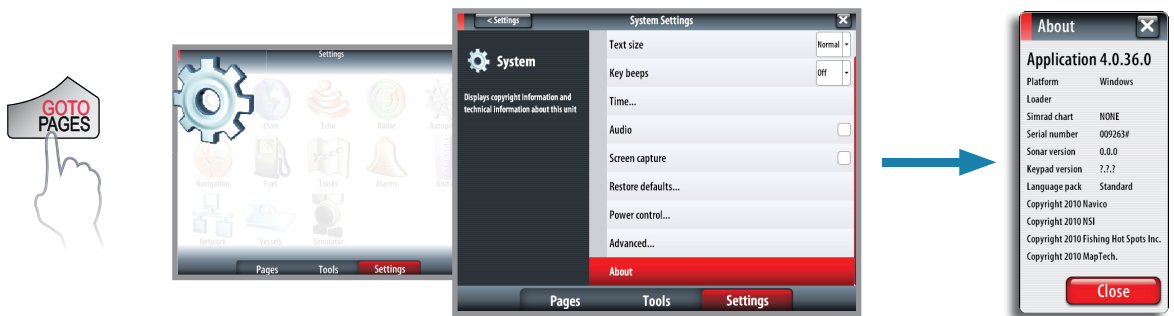

→ **Note:** The About dialog above is an example only and may not match the sw installed on your unit!

The manual will be continuously updated to match new sw releases. The latest available manual version can be downloaded from www.simrad-yachting.com.

Contents

9 Introduction

- 9 The NSS front panel and keys
- 10 The NSS screen

13 Basic operation

- 13 The power key
- 13 Using the touch screen
- 13 Pages and panels
- 14 The menus
- 14 Dialog boxes
- 15 Positioning a Man Over Board mark

16 Charts

- 16 The chart panel
- 16 Chart scale
- 16 Panning the chart
- 16 The vessel symbol
- 17 Using the cursor on the chart panel
- 18 Positioning the chart on the panel
- 18 Chart overlay
- 18 Using 3D charts
- 19 Insight chart options
- 20 Navionics chart options
- 21 The chart settings panel

23 Waypoints, routes & tracks

- 23 Waypoints
- 24 Routes
- 24 Tracks
- 25 The waypoints, route and tracks panels

26 Navigating with the NSS

- 26 The Goto menu
- 26 Navigating on the chart
- 27 Navigating with autopilot
- 27 Navigation settings panel
- 28 Navigation panels

30 Using the autopilot

- 30 Safe operation with the autopilot
- 30 Activating the autopilot
- 31 The autopilot panel
- 31 Selecting autopilot modes
- 31 Autopilot mode overview
- 33 Controlling steering performance in automatic modes
- 33 Using the autopilot in standby mode
- 33 Power steering (NFU)
- 33 Follow-up steering (FU)
- 33 AUTO mode (auto compass)
- 37 NoDrift mode
- 37 Navigating with the NSS
- 38 Sailing with the autopilot
- 40 Wind steering and navigation

40	Using the NSS in an AP24/AP28 system
40	Using the autopilot in an EVC system
41	The autopilot settings panel
44	Using the radar
44	The radar panel
44	The radar operational modes
44	Using the cursor on the radar panel
45	Optimizing the radar image
45	Positioning the radar center
46	Measuring range and bearing to a target
47	Setting a guard zone around your vessel
47	Radar options
49	MARPA targets
50	Radar overlay
51	Radar settings panel
52	The echosounder
52	Setting up the echosounder panel
53	Zooming
54	Adjusting color and gain settings
54	Using the cursor on the echosounder panel
55	Placing a mark on an echosounder image
55	Measuring distance
55	Pausing the echosounder
55	Recording the echosounder data
56	Echo options
57	StructureScan™ overlay
57	The echosounder settings panel
59	StructureScan™
59	Setting up the StructureScan™ image
60	Zooming
61	Adjusting the color settings
61	Using the cursor on the StructureScan™ panel
61	Placing a mark on a StructureScan™ image
62	Measuring distance
62	Pausing StructureScan™
62	Recording the StructureScan™ data
62	Structure options
63	The Instruments panels
63	The dashboards
63	Customizing the Instrument panel
64	Using AIS
64	Target symbols
64	Viewing information about AIS targets
65	Vessel alarms
65	The vessel settings panel
67	Audio
67	Enabling audio
67	The audio media bar
68	Setting up the SonicHub speakers

68	Operating the audio source
69	Audio playback
69	Using the FM/AM radio
70	Using Sirius radio
71	SiriusXM™ weather (North America only)
71	The weather display
71	Showing detailed weather information
72	Weather symbology
73	Weather alarms
73	Weather reports
73	Animating Sirius™ weather graphics
74	Using Video
74	The video panel
74	Setting up the video panel
76	BEP CZone
76	The BEP CZone panel
76	CZone modes
76	CZone system overview options
77	The CZone info panel
78	The alarm system
78	Type of messages
78	Acknowledging a message
79	The alarms dialog
80	The Tools page
80	Vessels
80	Alarms
80	Satellites
81	Find
81	Waypoints/routes/tracks
81	Trip Log
81	Sun/moon
81	Tides
83	Customizing your system
83	Page overview
83	Create favorite pages
84	Setting the appearance of the instrument bar
84	Changing system settings
86	Using the simulator
86	Simulator mode
86	Demo mode
86	Selecting simulator source files
86	Advanced simulator settings
87	Maintenance
87	Preventive maintenance
87	Simple maintenance procedures
87	Software upgrades
87	Trouble shooting
88	Backing up your system data

89 Menu and dialog overview

89 Panel menus

89 Goto menu


90 Settings dialogs

92 Index

1

Introduction

The NSS front panel and keys

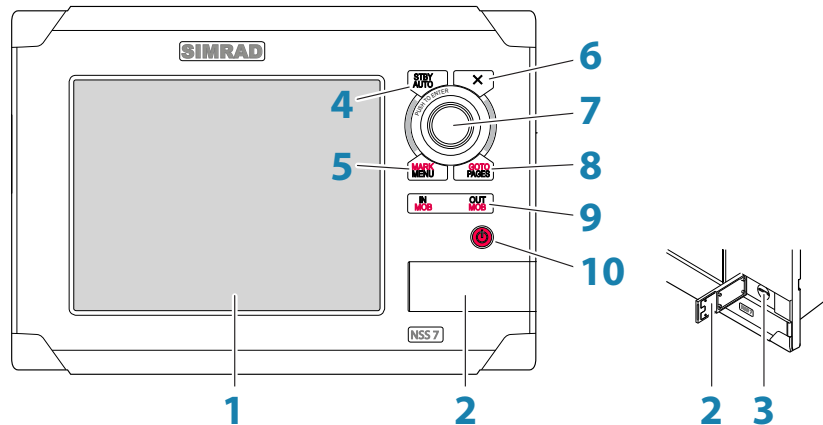

1 Touch screen

2 Card reader door

3 Micro-SD Card reader

Used for optional Navionics or InsightHD chart data, software updates, transfer of user data and system backup.

4 STBY / AUTO key

Used for autopilot operation.

5 MARK / MENU key

A short press displays the active panel's menu.

A double press displays the Settings menu.

A long press places a waypoint at the vessel's position.

6 X key

Used to exit dialogs, to return to previous menu level and to remove the cursor from the screen on chart, radar and echosounder panels.

7 Rotary knob

Used for zooming chart and for scrolling through menus. Press rotary knob to confirm selection.

8 GO TO / PAGES key

A short press displays the **Pages** overview panel (**Home** page). Repeated short presses toggles between **Pages** overview, **Tools** and **Settings** panels.

A long press displays the **Goto** menu.

9 IN / OUT / MOB key


Zoom key for chart, radar and echosounder panels. A simultaneous press on both key ends will position a Man Over Board (MOB) mark at vessel's position.

10 Power key

A long press turns the unit ON/OFF.

A short press brings up the backlight and radar standby control dialog. Repeated short presses toggles between preset brightness levels.

The NSS screen

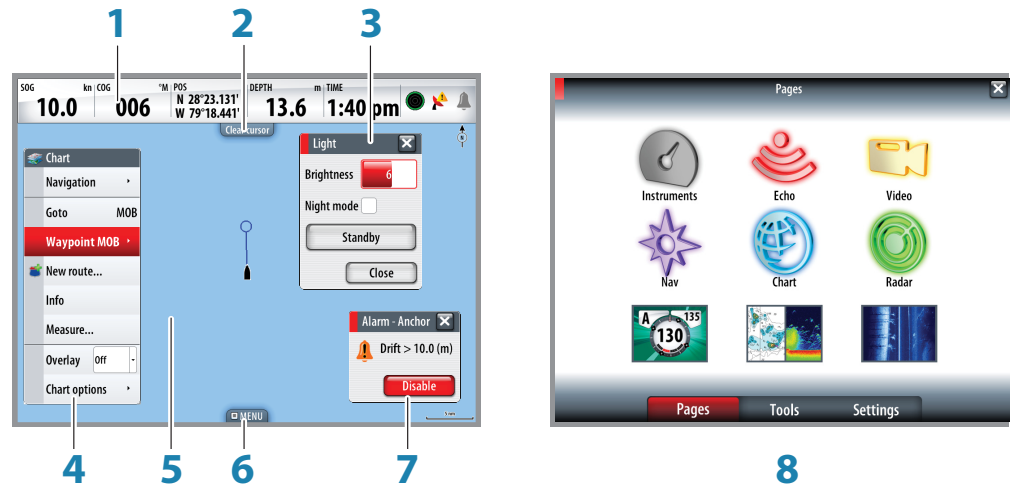

See "Customizing your system" on page 82 for further information

1 Instrument bar

Navigation and sensor info can be viewed in a user configurable instrument bar on top of your pages.

2 Panel button

You can tap the text on this area to end an ongoing operation, e.g. to remove the cursor from the screen, to end route editing and to stop measuring distance.

3 Dialogs

Dialogs are used for user input or for presenting information to the user.

A dialog may be presented in full-screen or as a popup dialog in the centre of the screen. Depending on type of information or entry, different keys are used to confirm, cancel and close the dialog.

A dialog can always be closed by tapping the in the upper right corner or by pressing the **X** key.


4 Menus

Different menus are available to select options and to configure your system. A menu is displayed by pressing the **MENU** key, by tapping the **MENU** panel button, or by tapping and holding on the touchscreen.


5 Application panels

Each application connected to the system is presented on panels, and you can have several panels depending on screen size:


- NSS7 2 panels
- NSS8 and NSS12: 4 panels




1-panel page



2-panels page










3-panels page



4-panels page

The system includes the following page groups, which each have a pre-configured combination of panels:

Icon	Description	Main page
	Instruments with configurable live data from system internal, and external sources such as engines	Instruments
	Echosounder	Echosounder
	Live video	Video
	Navigation information	Steering
	Insight or Navionics charts, depending on region	Chart
	Radar	Radar

 See "Customizing your system" on page 82 for further information

The main page in each group is a full size panel. All pre-configured pages, except the main page for the group, can be modified by the user.

In addition to these panels the following applications can be connected and displayed on other panels:

Panel	Description
AIS	AIS information as overlay on chart and radar panels
Weather	Sirius (North America only) weather graphics and data as overlay on chart panel
Audio	Satellite radio (North America only) and SonicHub functions as a panel along the bottom of a page


6 MENU panel button

Tapping this panel button will display the menu for active panel. Same function as pressing the **MENU** key.

7 Alarm message

The system will continuously check for dangerous situations and system faults while the system is running. When an alarm situation occurs, an Alarm dialog will pop up.

If you have enabled the siren, an audible alarm will be activated when an alarm situation occurs.

 See "The alarm system" on page 77 for further information

8 The Control pages

The Control pages give access to page selection, tools and settings.

The **Pages** overview panel (**Home**) is displayed by pressing the **PAGES** key. Repeated presses on this key will toggle between the control panels.

You can also switch between the control panels by dragging your finger horizontally on the screen.

All control panels and sub-panels are always full screen, and they will open on top of your previous page. When you close one of these panels the display will return to last active page.



Pages overview (Home page)



Tools



Settings

Pages overview

The pages overview panel is accessed from any operational mode by pressing the **PAGES** key.

The panel includes 6 page group icons together with shortcuts to the autopilot panel, to a combined chart/echo panel, and to the StructureScan panel.

Note: To see an autopilot panel an AC12/42 or SG05 autopilot computer must be connected to the system. Respectively a StructureScan module must be available on the network to use StructureScan.

Tools

The tools panel include options that are not specific to any panel e.g. status regarding vessels, alarms, satellites, sun/moon and tides. Also included are waypoints, routes and tracks library, trip log, sun/moon status, find function and files.

If a CZone system is connected, this function is access from the Tools panel.



Settings

The Settings panel gives access to system and vessel setup, application settings, and to the simulator.

2

Basic operation

The power key

	• Press and hold:	Turn unit on/off	
	• Single press:	Display dialog for light adjustment, standby mode and radar standby/transmit	
	• Repeated presses:	Toggle preset brightness levels (10 - 6 - 3 - 1)	

Advanced power control

The NSS can be wired and configured to control the power of displays and compatible devices. See the NSS Installation manual for more information.

→ **Note:** If the power key is released before shut-down is completed, the power off is cancelled.

A night mode which optimizes the color palette for low light conditions, is included.

→ **Note:** Details on the chart may be less visible when the Night mode is selected!

When in Standby mode, the backlight for touch screen and keys are turned off to save power. The system will continue to run in the background and will notify you if an alarm situation should occur.

You return from Standby mode to normal operation by pressing the power key.

If the radar is transmitting you can set it to standby mode from within the **Light** dialog.

Using the touch screen

Basic touchscreen operation on the different panels is shown in the table below.

The panel sections later in this manual have more information about panel specific touch screen operation.

Operation	Menu/ Dialogs	Panels		
		Chart	Echo	Radar
Tap	Select/ toggle item	Place cursor		
Tap and hold		Display menu for active panel		
Drag	Adjust slider value Scroll dialog	Pan chart (any direction)	Pan echo history (horizontal movement)	





→ **Note:** When tapping and holding, a circle will spin around the tap point. Hold till action circle has completed or until the action is confirmed by a second beep.

Pages and panels

Select pages

You access a page group and then select the page to display from the **PAGES** panel.

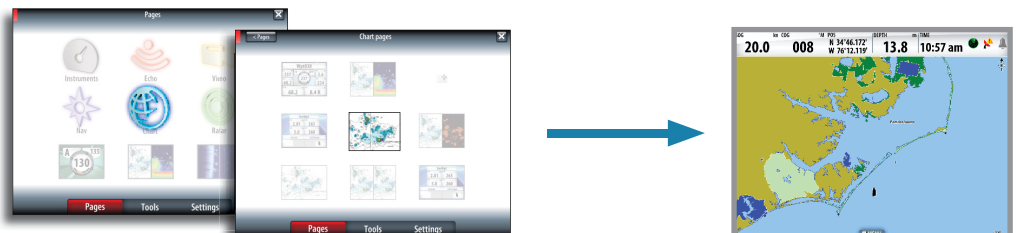



Select active panel





In a split screen you have multiple panels, but only one panel can be active at a time. You will only be able to access the context menu of the active panel. The active panel is outlined with a red border.

You can switch between active panels by tapping the required panel.


The menu

Menus are used to operate the system and to adjust settings.

You display a menu by:

	<ul style="list-style-type: none"> Pressing the MENU key 	
	<ul style="list-style-type: none"> Tapping the MENU panel button 	
	<ul style="list-style-type: none"> Pressing and holding on active panel 	

- You select a menu item and toggle on/off menu check boxes by tapping selected item.
- You adjust slide bar values by tapping the item and then dragging your finger on the slide bar. The value can also be adjusted by turning the rotary knob.
- Drop-down listings are selected by tapping the item and then the selected value.



Check box



Slide bar



Drop-down listing

You can also operate a menu by using the rotary knob to select menu item, and then pressing the knob to confirm your selection.

By pressing the **X** key the menu will return to previous menu level, and then exit. You can also close a menu by tapping the screen outside the menu area.


Dialog boxes

You select entry fields and keys in a dialog box by tapping the screen or by using the rotary knob. You can only enter information when a field is selected and highlighted.


Some dialog listings might extend beyond the screen area. These dialogs will include a scroll indicator, and you scroll by dragging the list or turning the rotary knob.

Numeric and alphanumeric keyboards will automatically be displayed when required for entering user information in dialogs.

A virtual keyboard is operated by tapping the virtual keys.

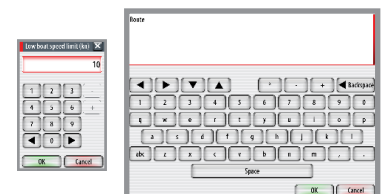

A dialog is closed by tapping the **X** in the upper right corner or by pressing the **X** key.

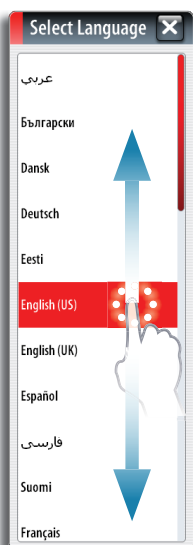

Placing the cursor

The cursor is by default not shown on any panel.

You tap the screen to place the cursor on a Chart, Radar or Echosounder panel. The cursor information window will show position coordinates at the cursor position, and range and bearing to the vessel.

N 32°47.541'
W 78°57.384'
47.7 nm, 136 °M

On an Echosounder panel, the cursor information window will include the depth at cursor position.

Further use of the cursor is described in the Chart, Radar and Echosounder sections.

To remove the cursor and cursor window from the panel, press the **X** key or tap the **Clear cursor** panel button.


Clear cursor

Positioning a Man Over Board mark

If an emergency man over board situation should occur, you can position a Man Over Board mark at the vessel's current position by pressing the two **MOB** keys simultaneously.

When you activate the MOB function the following actions are automatically performed:

- a MOB mark is positioned at the vessel's position
- the display switches to a zoomed chart panel, centered on vessel position
- the NSS creates an active route to the MOB mark



N 28°24.479'
W 79°27.650'
8.10 nm, 274 °M

MOB

MOB location saved



Cancel navigation

The NSS will continue navigating towards the MOB point until the waypoint is reached or until you select to stop this navigation.



Delete a MOB mark

A MOB mark is deleted by selecting the MOB mark and then activating the menu.

A MOB can also be deleted as described in "Waypoints, routes & tracks" on page 22.

3

Charts


The chart function displays your vessel's position relative to land and other chart objects. On the panel you can plan and navigate routes, place waypoints, overlay a radar image or weather information, and display AIS targets.

The NSS has different embedded cartography depending on region. Units sold in America will include Insight cartography, while units sold in other regions will have embedded Navionics coastal (Silver) cartography split by region. All units will support Navionics Platinum Plus and TurboView via micro-SD Card slot accessible from the front of the unit.

Charts are shared over the network, so only one chart card per boat is required.

The first part of this section describes how to use the charts, and is common to both Insight and Navionics. Chart options depend on which cartography is in use on the unit. These are covered in a separate section.

The chart panel

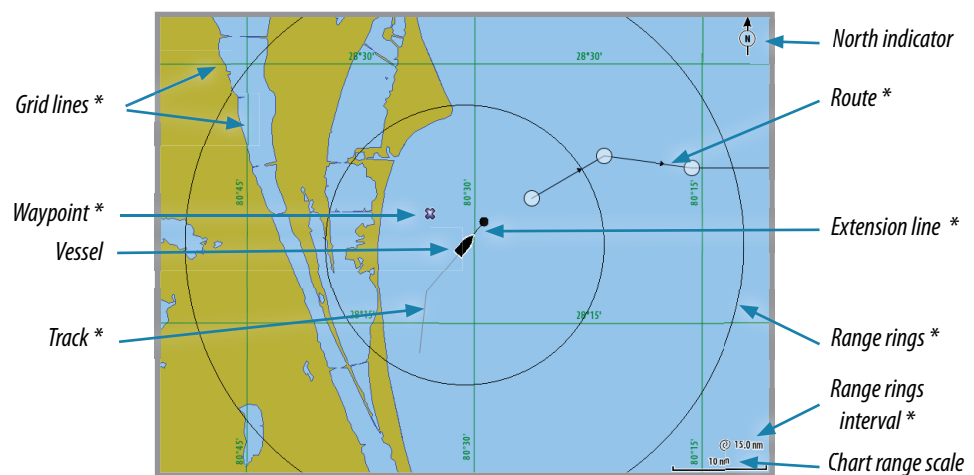

* Optional chart items

→ **Note:** You turn the optional images on/off individually. See “The chart settings panel” on page 21.




Chart scale

You zoom in and out on the chart by using the **IN/OUT** keys or by using the rotary knob.


Chart range scale and range rings interval (when turned on) will be shown in the lower right corner of the chart panel.



Panning the chart

You can move the chart in any direction by tapping the screen and dragging your finger in the selected direction.

Pressing **X** key will remove the cursor from the panel, and the chart center will be positioned at the vessel.



The vessel symbol

Position and orientation

When a GPS and a suitable heading sensor are connected to the system, the vessel symbol indicates vessel position and heading.

Without a heading sensor fitted, the vessel icon will orientate itself using COG (Course over Ground). If no GPS is available the vessel symbol will include a question mark.



N 32°47.541'
W 78°57.384'
47.7 nm, 136 °M


Using the cursor on the chart panel

The cursor is by default not shown on the chart panel.

When you tap the screen, the cursor will become visible and the cursor position window will be activated. When the cursor is active, the chart will not pan or rotate to follow the vessel.

To remove the cursor and cursor window from the panel, press the **X** key or tap the **Clear cursor** panel key.

Pressing the **X** key repeatedly will toggle the chart center between the vessel and the cursor position.




Displaying information about chart and chart objects

When you tap a chart item, a waypoint, a route or a target, basic information for the selected item will be displayed.

By tapping and holding or by pressing the rotary knob when a chart item is selected, all available information for that item will be shown.



The information can also be displayed by using the menu.

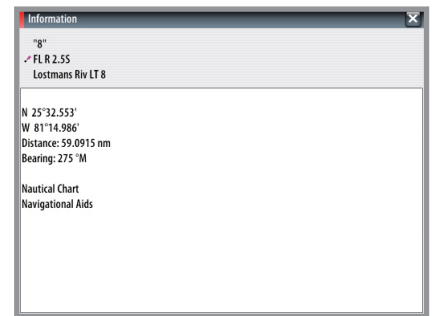

→ **Note:** Popup information has to be enabled to see basic item information.


If the cursor is not active, available information for objects close to the vessel can be displayed.

If no information is available, the info menu item will not be shown.

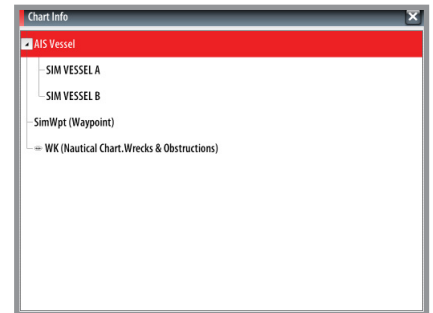

Placing waypoints

You place a waypoint by tapping the chart panel on the selected position and then activating the menu.



Creating routes

You can quickly create routes by tapping the chart panel.

1. Activate the menu
2. Tap the screen to position the first routepoint, and then continue tapping the screen to place the remaining routepoints
3. Save the route by tapping the **Finish editing** panel button or by activating the menu

See "Waypoints, routes & tracks" on page 22 for more information about waypoints and routes.

Dragging waypoints


1. Tap the waypoint to make it active
2. Drag the waypoint to the new position

The waypoint position will be automatically saved.


Measuring distance


The cursor can be used to measure the distance between your vessel and a selected position, or between 2 points on the chart panel.

3. Tap the screen on the place to where you want to measure the distance from the vessel
4. Start the measure function from the menu
 - A line will be drawn from the vessel center to the cursor position, and the distance will be listed in the Cursor Information window
5. Continue tapping the screen to position new measuring points



You terminate the measuring function by pressing the **X** key or the **Finish measuring** panel key.




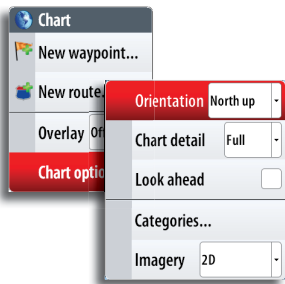


Positioning the chart on the panel

Chart orientation


Several options are available for how the chart is rotated in the panel. The chart orientation symbol in the panel's upper right corner indicates the north direction.



North up



Heading up



Course up

North up

Displays the chart with the north direction upward. Corresponds to the usual orientation of nautical charts.

Heading up

Displays the chart with the vessel's heading directly up on the chart image. Heading information is received from a compass. If heading is not available, then the COG from the GPS will be used.

Course up

Rotates the chart in the direction of the next waypoint when in navigation mode. This option works only when there's an active route. If no route is active the heading up orientation will be used until a route is made active.

Look ahead

This option centres the chart slightly forward of your vessel so that you can maximize your view ahead.




Chart overlay

Radar, AIS and weather information can be displayed as overlay on your chart panel.

When radar or weather overlay is selected, the chart context menu will be expanded to include basic function for the selected overlay.

Radar, weather and AIS functions are described in separate sections in this manual.

Using 3D charts

→ **Note:** To use the 3D functionality you must have Navionics charts including 3D cartography for the appropriate area.

For selecting cartography, see "Chart data" on page 21.

The boat icon

You can select different boat icons, and you can have extension lines as in traditional 2D charting. Refer "3D boat selection" on page 22.

It is not possible to scale the boat icon to match actual boat size, and the size remains the same independent on chart scaling.



Zooming 3D charts

You zoom the 3D chart by using the **IN/OUT** key. The rotary knob will not zoom 3D charts.



3D chart view options

There are two 3D views available:

- Vessel mode - default mode keeping the boat in center on the chart panel
- Explore mode - allows you to move the 3D chart view away from the vessel

You toggle between these two modes by pressing the **X** key.

Vessel mode

In this mode the camera follows the vessel. The vessel's position will be in center if not Look ahead option is selected.

The camera angle is by default as seen from your eye position, looking toward the vessel. The vessel's rotation on the chart is defined by the chart orientation settings.

You can change the camera tilt angle and rotate the camera around the vessel by tapping and dragging your finger on the screen. Once you remove your finger from the screen it will return to default view towards the vessel, but with your selected tilt angle.



Explore mode

You switch from Vessel mode to Explore mode by pressing the **X** key or by tapping the rotate/pan icon on the right side of the panel.

You switch back to vessel mode by tapping the **Return to vessel** panel key, or by pressing the **X** key.

The Explore mode allows you to view the entire 3D chart, regardless of vessel position.

You can rotate and move the camera (pan) away from your vessel. You switch between panning and rotating camera motion by tapping the icons on the right side of the chart panel.




When camera pan is selected, you move the camera away from the vessel and around in the chart by tapping and dragging on the screen. When you remove your finger from the chart the view will remain in the selected position.



You can rotate the camera horizontally by using the rotary knob.

When camera rotate is selected the camera position is fixed, and the camera can only be rotated and tilted. You rotate and tilt the camera by tapping and dragging your finger on the screen. You rotate the camera horizontally with the fixed tilt angle by using the rotary knob.



Insight chart options

Chart orientation

See page 18.

Chart detail

Low

This is the basic level of information that cannot be removed, and includes information that is required in all geographic areas. It is not intended to be sufficient for safe navigation

Medium

This is the minimum information sufficient for navigation

Full

This is all available information for the chart in use

Look ahead


This option centres the chart slightly forward of your vessel so that you can maximize your view ahead.

Categories


Insight charts includes several categories and sub-categories that you can turn on/off individually depending on which information you want to see on your display.

Chart imagery style


The charts can be displayed in two different imagery styles, either as 2D basic mapping style, or with shaded relief presenting chart including terrain imaging.



2D



Shaded relief

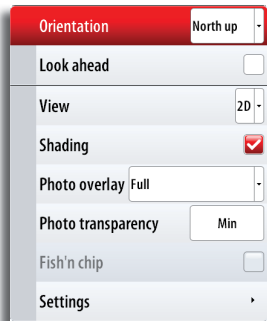

Navionics chart options

Chart orientation and Look ahead

See page 18.


Chart view

The built in Navionics chart database provides you with detailed coastal cartography, with 2D and 3D view options.

- 2D presents chart information in a basic mapping mode with Navionics details
- 3D provides a three dimensional graphical view of land and sea contours

Chart shading

Shading adds terrain information to the chart.



Traditional 2D chart





Chart with shading

Photo overlay

Photo overlay enables you to view satellite photo images of an area as an overlay on the chart. The availability of such photos is limited to certain regions.

You can view photo overlays in either 2D or 3D modes.



No Photo overlay






Photo overlay, land only




Full Photo overlay

Photo transparency

The Photo transparency sets the opaqueness of the photo overlay. With minimum transparency settings the chart details will be almost hidden by the photo.



Minimum transparency




Transparency value = 10

Navionics Fish'n Chip

NSS supports Navionics Fish'n Chip (US only) chart feature.

For more information, see www.navionics.com.

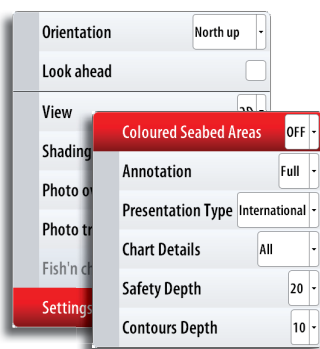

Optional settings for Navionics charts

Colored Seabed Areas

Used for displaying different depth areas in different shades of blue.

Annotation

Determines what area information, such as names of locations and notes of areas, is available on display.

Presentation type

Provides marine charting information such as symbols, colors of the navigation chart and wording for either International or US presentation types.

Chart details

Provides you with different levels of geographical layer information.

Safety depth

The Navionics charts use different shades of blue to distinguish between shallow and deep water.

The safety depth sets the limit for which depths that shall be drawn without blue shading.

→ **Note:** The built in Navionics database features data down to 20 m, after which it is all white.

Contours depth

Determines which contours you see on the chart down to the selected safety depth value.

The chart settings panel


Settings and display options made in the Chart settings page are common for all chart panels. For optional chart panel settings, refer the illustration on page 16.

Chart data

The NSS can use Navionics Platinum Plus and TurboView via micro-SD Card Slot accessible from the front of the unit.

Charts are shared over the network, so only one chart card per boat is required.

→ **Note:** The system will not automatically switch to embedded cartography if the micro-SD card is removed. A low-resolution chart will be displayed until you re-insert the micro-SD card or manually switch back to embedded cartography.




Range Rings

Turns on/off range rings on the chart.

The range rings can be used to present the distance from your vessel to other chart objects.

The range scale is set automatically by the system to suit the chart scale.

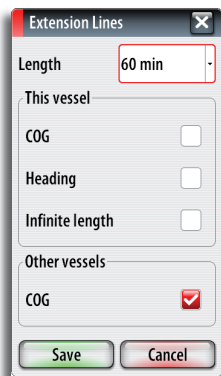


The vessels' extension lines

Sets the length of the extension lines for your vessel and for other vessels shown as AIS targets.

The length of the extension lines are either set as a fixed distance, or to indicate the distance the vessel will move in the selected time period.


Own vessel heading is based on information from the active heading sensor and COG from active GPS sensor.

For other vessels COG data is included in the message received from the AIS system.



Pop-up information

Selects whether basic information for chart items shall be displayed when you tap the item.



Grid lines

Turns on/off viewing of longitude and latitude grid lines on the chart.

Waypoints, Routes, Tracks

Turns on/off displaying of these items on chart panels.

Navionics specific settings

3D boat selection

Determines which icon to use on 3D charts. See "The boat icon" on page 18.

Synchronize 2D/3D chart

Links the position shown on one chart with the position shown on the other chart when a 2D and a 3D chart are shown side by side.

4

035

Waypoints, routes & tracks

Waypoints

A waypoint is a user generated mark positioned on a chart, on a radar image or on an echosounder image. Each waypoint has an exact position with latitude and longitude coordinates. A waypoint positioned on an echosounder image, will in addition to position information have a depth value.


A waypoint is used to mark a position you later may want to return to. Two or more waypoints can also be combined to create a route.

Positioning waypoints

Placing a waypoint at vessel position


You can position a waypoint at the vessel position from any panel by pressing and holding the **MARK / MENU** key.

Waypoint 030 created at vessel



Using the cursor to position waypoints

On chart, echosounder and StructureScan panels you can place a waypoint on a selected position by tapping the screen and then activating the panel menu.

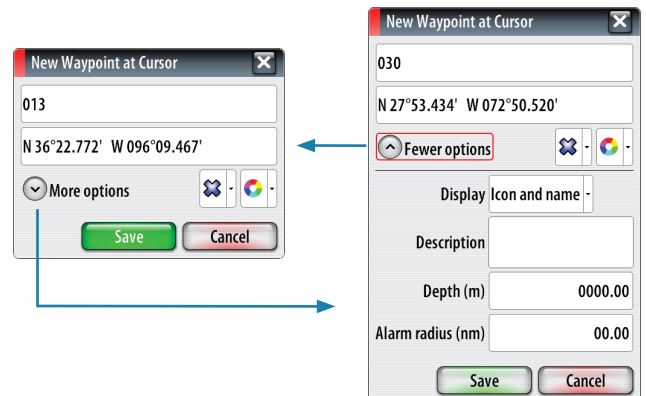

Edit waypoints

A selected waypoint can be deleted or edited on a chart panel from the menu, or from the waypoint dialog.

You can quickly move a waypoint on a chart panel by tapping the desired new location on the screen.




Using the edit waypoint dialog

This dialog is activated by tapping the waypoint and then activating the menu, or pressing the rotary knob when the waypoint is selected.

The dialog can also be activated from the Waypoint list. See "The waypoints, route and tracks panels" on page 25.

Waypoint alarm settings



You can set an alarm radius for each individual waypoint you create.

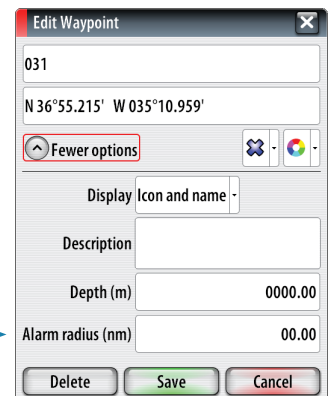

→ **Note:** The waypoint radius alarm must be toggled ON in the alarm panel to activate an alarm when your vessel comes within the defined radius.

Moving a waypoint by tapping the screen

1. Select the waypoint by tapping it
2. Activate the menu and select the move option
 - The waypoint icon will change to indicate moving mode
3. Tap on the chart panel to select a new position
4. Confirm the new position by pressing the rotary knob, tapping the panel key or by using the options in the menu

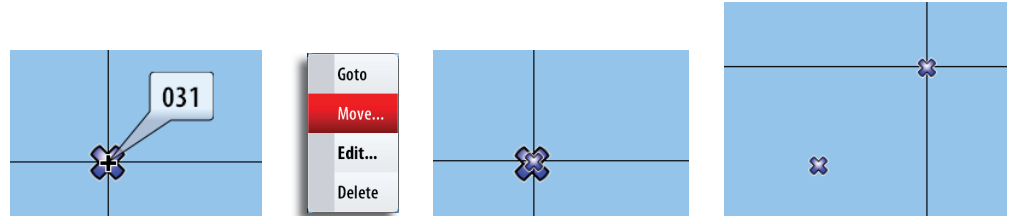


Routes

A route consists of a series of routepoints entered in the order that you want to navigate them.

When you tap on an existing route, it will turn blue and the route name will be displayed.

Creating new routes




1. Select the new route option from the menu
2. Tap the panel to position the first waypoint
3. Continue tapping the chart panel until all routepoints are positioned
 - A waypoint can easily be re-positioned by dragging it to the new position
4. Save the route by tapping the **Finish editing** panel button or by using the options in the menu

The route can also be created from the Routes panel described later in this section.

Edit a route

A route and a waypoint can only be edited from the chart panel when the item is selected.

1. Tap the route to make it active
 2. Activate the menu and select the route and edit option
 3. Tap the panel to add a new routepoint
 - If you tap on a leg a new point will be added between existing routepoints
 - If you tap outside the route the new routepoint will be added after the last point in the route
 4. Drag a routepoint to move it to a new position
 5. Save the route by tapping the panel button or by using the options in the menu
- **Note:** a single routepoint can be moved by tapping the routepoint and then selecting the move option in the menu.



Tracks

A track is a graphical presentation of the historical path of the vessel, allowing you to retrace where you have travelled. A track can be converted to a route in the Tracks panel, as described later in this section.

From the factory, the system is set to automatically draw a track. The system will continue to record the track until the track length reaches the maximum trail point setting, and will then automatically begin overwriting the oldest track points.

The automatic tracking function can be turned off from the Tracks panel described later in this section.

Creating a new track


You define the track settings and start the new track from the Tracks Settings dialog described below.

Track settings

The track is made up of a series of track points connected by line segments whose length depends on the frequency of track recording.

You can select to position track points based on time settings, distance, or by letting the NSS system position a waypoint automatically when a course change is registered.




→ **Note:** The Tracks option must also be turned ON in the chart settings to be visible.

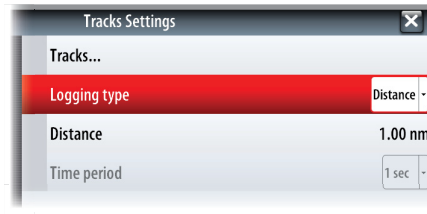

The waypoints, route and tracks panels

The Waypoints, Routes and Tracks panels gives access to advanced edit functions and settings for all these items available on your system.

The edit and settings options are accessed from the menu or by using the dialog buttons when one of the items is selected.

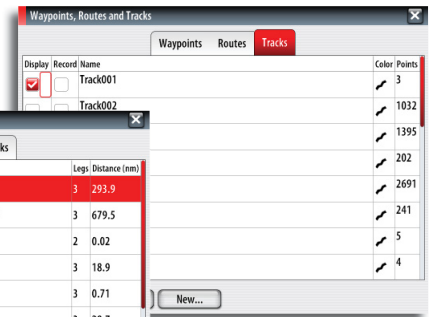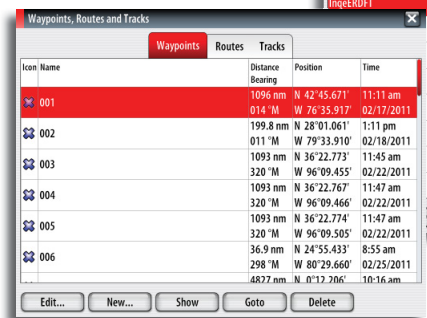

5

Navigating with the NSS

The navigation function included in the NSS allows you to navigate towards the cursor position, a waypoint or along a predefined route.

For information about positioning waypoints and creating routes, refer “Waypoints, routes & tracks” on page 22.




The Goto menu

You can start navigation from any panel by using the **Goto** menu, displayed by pressing and holding the **GOTO / MENU** key.


→ **Note:** The Goto cursor option will only be available when the cursor is active on a Chart, Radar or Echosounder panel.

When the NSS starts navigating, the cross track limits will be indicated on the chart. See “Navigation settings panel” on page 27.



Navigating on the chart

You can start navigating on the chart from the chart menu and from the **Goto** menu. The description and the illustrations below show use of the **Goto** menu, activated by pressing and holding the **PAGES** key.






Navigate to cursor position

You can start navigating towards a point on the chart by tapping the selected destination, activating the **Goto** menu and selecting the cursor option.

Navigate a route



You can start navigating a route by tapping the route and then activating the **Goto** menu.

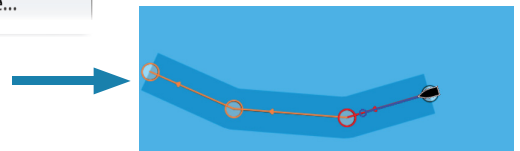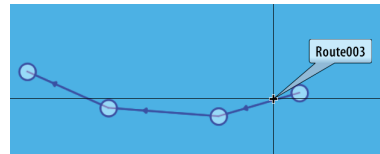


When route navigation is started, the **Goto** menu will expand showing options for skipping a waypoint, or for restarting the route from current vessel position.

Selecting start point

You can navigate a route, starting from any waypoint, by positioning the cursor over the selected waypoint and activating the **Goto** menu.

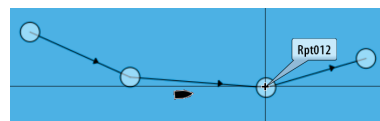




Cancel navigation

You cancel navigation from the **Goto** menu or the chart panel menu.

Navigating with autopilot

If an AC12, AC42 or an SG05 autopilot computer is connected to the system, autopilot functionality will be included in the NSS.


When you start navigation on a system with autopilot functionality, you will be prompted to set the pilot to navigation mode.

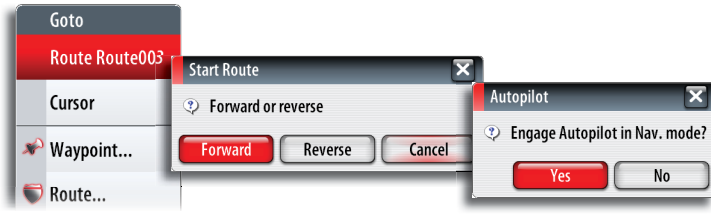

If you choose not to engage the autopilot, the pilot can later on still be set to navigation mode from the pilot menu.

For more information about autopilot functionality see “Using the autopilot” on page 29.

Navigation settings panel

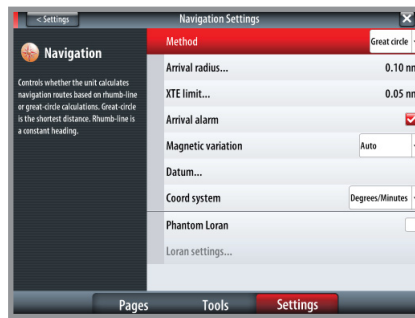

Navigation method

Different methods are available for calculating the distance and bearing between any two points on a chart.

The great-circle route is the shortest path between two points. However, if you are to travel along such a route, it would be difficult to steer manually as the heading would constantly be changing (except in the case of due north, south, or along the equator).

Rhumb lines are tracks of constant bearing. It is possible to travel between two locations using Rhumb line computation, but the distance would usually be greater than if Great circle is used.

Steering alarm limits

Arrival radius

Sets an invisible circle around the destination waypoint.


The vessel is considered arrived at the waypoint when it is within this radius.

Off course (XTE) limit

This parameter defines the vessel's accepted offset distance from the leg. If the vessel goes beyond this limit an alarm will be activated.

Arrival alarm

When the arrival alarm is enabled, an alarm will be activated when the vessel reaches the waypoint or when it is within the specified arrival radius.

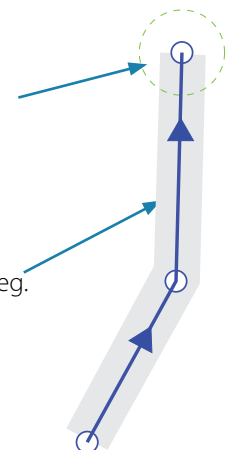

Magnetic variation

Magnetic variation is the difference between true bearings and magnetic bearings, caused by different location of the Geographic and the Magnetic north poles. Any local anomalies such as iron deposits might also affect the magnetic bearings.

Magnetic variation is applied in order to navigate with heading in "True" mode.

When set to Auto, the system automatically converts magnetic north to true north. Select manual mode if you need to enter your own local magnetic variation.

Datum

Most paper charts are made in the WGS84 format, which also is used by the NSS system.

If your paper charts are in a different format, you can change the datum settings accordingly to match your paper charts.

Coordinate system

Several coordinate systems can be used to control the format for lat./lon coordinates displayed on the chart panel.

Phantom Loran

Enables use of Phantom Loran.

Loran settings

Defines Loran chains (GRI) and preferred station for waypoint entry, cursor position and position panel.

The graphic example shows cursor position window with Loran position information.


For more information refer to your Loran system documentation.

N 25°44.044'
W 80°08.285'
43132.70 7980
62156.66
0.30 nm, 254 °M

Navigation panels

The Steer and Position panels can be used to display information when you are navigating.

The Steer panel

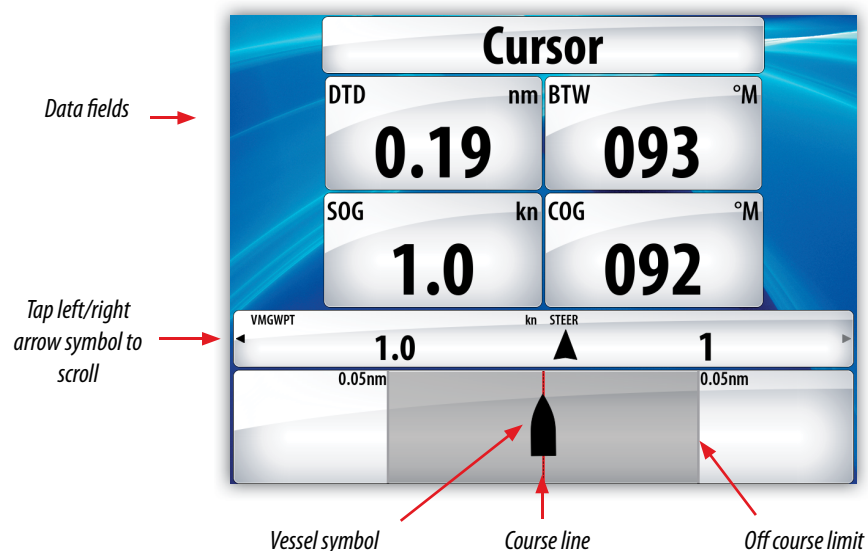

Data fields

The Steer panel offers the following information:

DTD	Distance to destination
BTW	Bearing to waypoint
SOG	Speed over ground
COG	Course over ground
TTD	Time to destination
ETA	Estimated time of arrival at next waypoint
VMG	Velocity Made Good towards next waypoint.
STEER	Course to steer towards next waypoint

The course line

When travelling on a route the course line shows the intended course from one waypoint towards the next.

When navigating towards a waypoint (cursor position, MOB or an entered lat/lon position), the course line will show the intended course from the point at which navigation was started towards the next waypoint.

Vessel symbol

The vessel symbol indicates distance and bearing relative to the intended course.

Off course limit

If the XTE exceeds the defined off course limit (Refer "Steering alarm limits" on page 27), this will be indicated with a red arrow including the distance from the track line.


If the off course alarm is enabled, the alarm will activate if the XTE exceeds the defined off course limit.

Position panels


By default, there is one position panel available showing GPS position.

If Loran is enabled as described on page 28, there will be two position panels. This is indicated with arrow symbols on left and right side of the panel.

You toggle between the panels by tapping the left or right side of the panel.

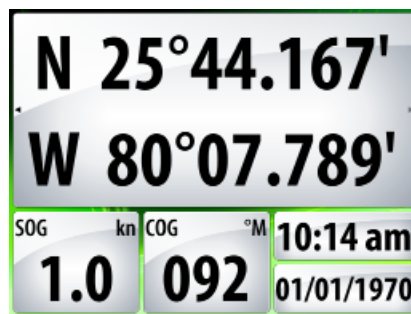

GPS position info

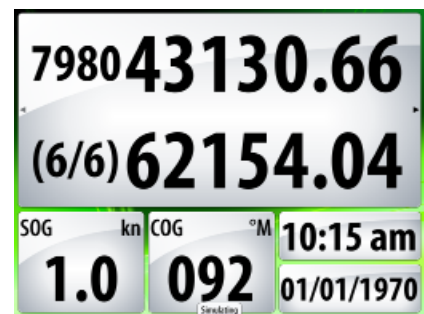

Loran position info

Data fields

Position in lat. and lon. (GPS) or as Loran GRI and station values

Time and date

SOG	Speed over ground
COG	Course over ground

6

Using the autopilot

If an AC12, AC42 or SG05 autopilot computer is connected to the system, autopilot functionality will be available in the NSS.

An Autopilot is designed to maintain an accurate course in various sea conditions with minimal helm movements.

Safe operation with the autopilot

⚠ Warning: An autopilot is a useful navigational aid, but DOES NOT under any circumstances replace a human navigator.


Switching from automatic mode to manual steering

You can switch the autopilot to STBY mode from any automatic operation mode by a short press on the **STBY/AUTO** key.

- **Note:** If the NSS is connected to an EVC system via the SG05, you can take manual control of the steering irrespective of the autopilot mode. Refer "Using the autopilot in an EVC system" on page 40.

Activating the autopilot

You can activate the autopilot from any panel as shown below.

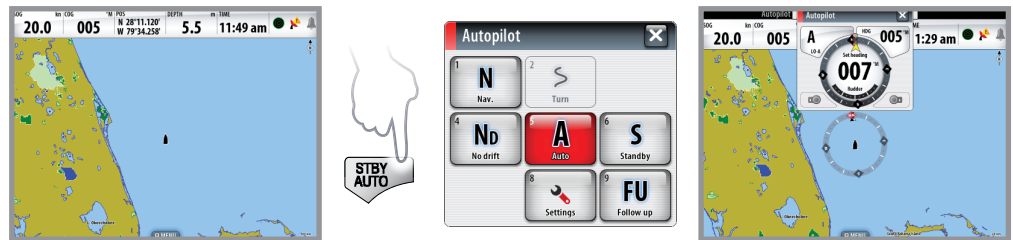

The autopilot pop up

You can only enable the autopilot once the pop-up is displayed.

Manual adjustments to the set heading can only be made when the port and starboard indicators are illuminated red and green - this is done by pressing the rotary knob, or by tapping the autopilot pop-up.

The autopilot popup shows active mode, heading, rudder and various steering information depending on active autopilot mode.

The pop-up has a fixed position on the page, and it can be shown on all pages except when an Autopilot panel is active.

You remove the pop-up from a page by tapping the **X** in the upper right corner or by pressing the **X** key.



Autopilot mode indication in top of the page

Autopilot information is by default shown in top of the pages when the Autopilot pop-up is not displayed.


You can select to turn this information off.

See "The autopilot settings panel" on page 41 for further information



Compass symbol on the chart panel


You can select to show a compass symbol around your boat on the chart panel. The compass symbol will be off when the cursor is active on the panel.





The autopilot panel

The autopilot panel is used to display information when you are navigating. It replaces the autopilot pop-up when used in full screen, or on any pages where it is used as a split pane. The autopilot mode indication bar will also not be shown when the autopilot panel is used. The shortcut icon used to activate the autopilot panel is by default available on the Pages panel. The panel can however only be used when an AC12, AC42 or SG05 computer is available on the network.

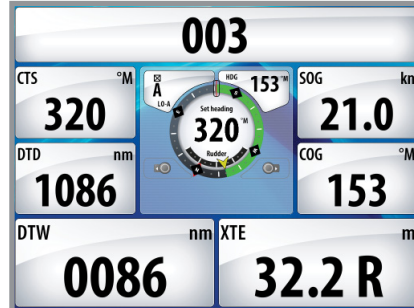

Data fields

The autopilot panel shows destination name, heading and rudder information. The following abbreviations are used:

CTS	Course to steer
DTD	Distance to destination
SOG	Speed over ground
COG	Course over ground
DTW	Distance to next waypoint
XTE	Cross track error








Selecting autopilot modes

You select an automatic mode or a feature from the Autopilot Mode selection menu, activated by tapping the mode icon or by pressing the **MENU** key.



Autopilot mode overview

The autopilot has several steering modes. Number of modes and features within the mode depend on boat type and available inputs, as shown in table on the next page.

MODE	FEATURE	BOATTYPE		DESCRIPTION	REQUIRED INPUT
		MOTOR	SAIL		
				Standby (passive) mode used when manually steering the boat at the helm	
	Power steering (NFU)	x	x	Controls the rudder movement by using the red (port) and green (starboard) indicators in the autopilot pop-up	Rudder feedback or VRF
		x	x	Sets rudder angle by using the rotary knob	Rudder feedback
		x	x	Keeps the boat on set heading	
	Heading capture	x	x	Cancels the turn and continues on the heading read from the compass	Heading, speed
	Turn (Pattern)	x		Moves the boat automatically in pre-defined turn steering patterns (Motorboats only)	
	Turn (Tacking)		x	Changes commanded heading with a pre-defined value	
		x	x	Keeps the boat on a straight bearing line	Heading, speed, position
	Dodging	x	x	Resumes NoDrift mode after a heading change	
		x	x	Steers the boat to a specific waypoint location, or through a route of waypoints	Heading, speed, position, waypoint/route information
			x	Steers the boat to maintain the set wind angle	Heading, speed, wind angle
	Tacking		x	Mirrors the set wind angle to the opposite side of the bow	
			x	Steers the boat to a specific waypoint location, or through a route of waypoints	Heading, speed, wind angle, waypoint/route information



Controlling steering performance in automatic modes


The autopilot should be configured during installation and setup. Some parameters may be adjusted during operation to increase the steering performance. Refer to “The autopilot settings panel” on page 41.



Using the autopilot in standby mode

The autopilot must be in STBY mode when you steer the boat manually.


You can switch the autopilot to STBY mode from any operation by a short press on the **STBY/AUTO** key.



Power steering (NFU)

If you tap the PORT or STBD key icons in the pop-up dialog when the autopilot is in STBY mode, the system will switch to NFU (Non-Follow-Up). You can then use the key icons to control the rudder, and the rudder will move as long as the key is pressed.

You return to STBY mode by a short press on the **STBY/AUTO** key.



Follow-up steering (FU)

You can select Follow-up steering from the Autopilot menu.

When FU is active you can use the rotary knob to set rudder angle. The set angle is indicated by the yellow pointer above the rudder angle graphic. The rudder will move to the commanded angle and then stop.



⚠ Warning: While in Follow-up mode you cannot take manual control of the wheel. You return to **STBY/AUTO** mode by a short press on the **STBY/AUTO** key.



AUTO mode (auto compass)

When the **AUTO** key is pressed, the autopilot selects the current boat heading as the set course. The yellow arrow shows the vessel's actual heading. If the arrow is pointing directly upwards, the vessel is on course.

The autopilot will keep the boat on the set course until a new mode is selected or a new course is set with the course knob or the PORT or STBD key icons.

Once the course is changed to a new set course, the boat will automatically turn to the new heading and maintain the new course.



Heading capture

When in AUTO or NoDrift mode the heading capture feature allows you to automatically cancel the turn you are in by an instant press on the rotary knob. The autopilot will cancel the turn to continue on the heading read from the compass the very moment you pressed the rotary knob. This is a useful feature if you are not sure of the exact turn you have to make to steer towards e.g. an inlet or a dock.




Turn pattern steering (power boats)

The autopilot includes a number of automatic turn steering features for power boats when the pilot is in AUTO mode.

The turn steering option will not be available if the boat type is set to sailboat - instead the tack/gybe feature is implemented.

Initiating a turn

The illustration below shows how you start the spiral turn steering from the Autopilot menu. You select the turn direction and start the turn by tapping the left or right keys or by using the rotary knob.

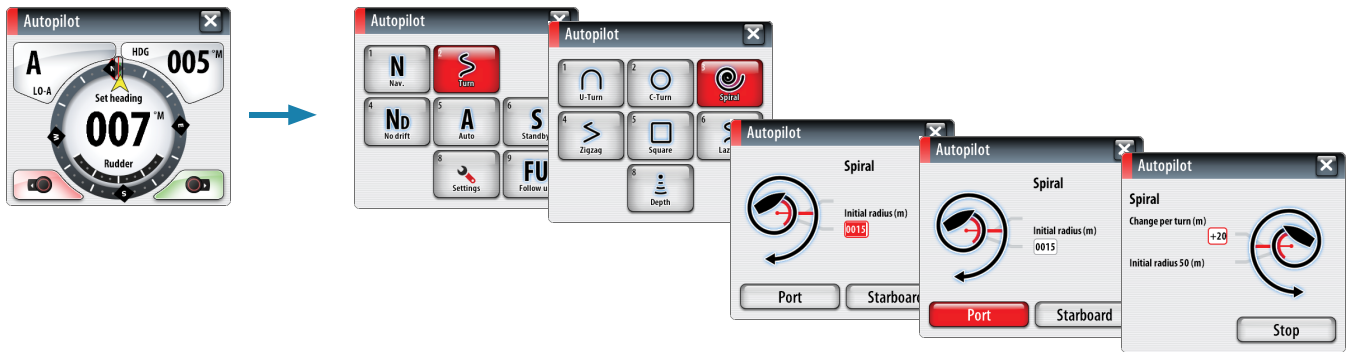

Stopping the turn

You can at any time during a turn press the **AUTO/STBD** key to return to standby mode and manual steering.

Turn variables


All turn steering options, except the C-turn, have settings that you may adjust before you start a turn and at any time when the boat is in a turn. Refer to the example above.



U turn

U-Turn changes the current set course to be 180° in the opposite direction.



The turn rate is identical to default rate of turn (ROT) setting. This cannot be changed during the turn.



C-turn

C-turn makes the boat turn in a circle.

You can adjust the turn rate (ROT) before the turn is initiated and during the turn. Increasing the turn rate makes the boat turn a smaller circle.



Turn parameter	Range	Change per step	Default	Units
Rate of turn (ROT)	10 - 600	5	90	%/min





Spiral-turn

Spiral-turn makes the boat turn in a spiral with a decreasing or increasing radius. This feature may be used for circling fish or when searching an object.

If the Change radius is set to zero, the boat will turn in a circle. Negative values indicate decreasing radius while positive values indicate increasing radius.

Turn parameter	Range	Change per step	Default
Initial radius	33 ft - 3281 ft	10	656 ft
	10 m - 1000 m	10	200 m
Change of radius per turn	-164 ft - +164 ft	5	66 ft
	-50 m - +50 m	2	20 m

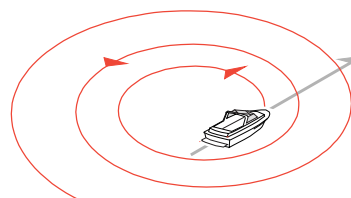

Zigzag-turns

For navigating in a zigzag pattern, you set the initial course change before the turn is started.


During the turn you can alter the course change and the leg distance.

The main course can be changed by turning the rotary knob.

A = Initial course change

B = Course change

C = Leg distance

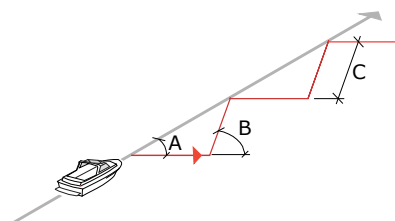


Turn parameter	Range	Change per step	Default
	4° - 140°	4	28°
Leg distance	82 ft - 9843 ft 25 m - 3000 m	50 25	1641 ft 500 m



Square-turn

The square-turn feature makes the boat automatically turn 90° after having travelled a defined leg distance.

You can at any time during the turn change the distance of the leg until the boat makes a new 90° turn. You can also at any time change the main course by turning the rotary knob.

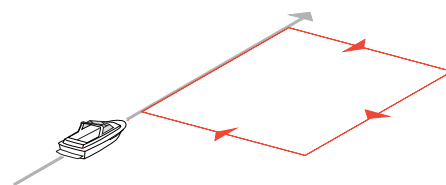

Turn parameter	Range	Change per step	Default
Leg distance	82 ft - 9843 ft 25 m - 3000 m	50 25	1641 ft 500 m




Lazy S-turn

In the lazy-s turn the boat will yaw around the main course.

You set the selected course change before the turn is started.

During the turn you can alter the course change and the turn radius.

The main course can be changed by turning the rotary knob.

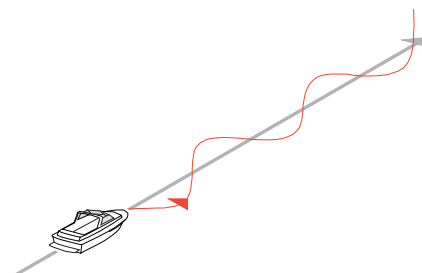


Turn parameter	Range	Change per step	Default
Course change	4° - 160°	4	28°
Radius	16 ft - 1641 ft 5 m - 500 m	5 10	656 ft 200 m



Depth Contour Tracking, DCT™

If the system has input from an echosounder, the autopilot can be set to follow a depth contour.

⚠ Warning: Do not use this feature unless the seabed is suitable. Do not use it in rocky waters where the depth is varying significantly over a small area.

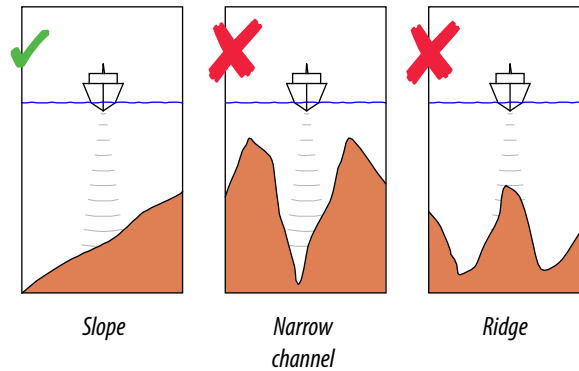

Use the following process to initiate DCT steering;

1. Ensure that you have depth reading on the NSS unit or on a separate depth instrument
2. Steer the boat to the depth you want to track, and in the direction of the depth contour (main course)
3. Activate AUTO mode, select DCT steering and monitor the depth reading
4. Use the port and starboard indicators in the autopilot pop-up to initiate the DCT steering to follow the bottom sloping to starboard or to port



The following parameters are available for DCT steering:

Turn parameter	Range	Change per step	Default
Depth gain	5 - 95	5	5
Contour Cross Angle	0° - 50°	1	0

Depth gain

This parameter determines the ratio between commanded rudder and the deviation from the selected depth contour. The higher depth gain value the more rudder is applied.

If the value is too small it will take a long time to compensate for drifting off the set depth contour, and the autopilot will fail to keep the boat on the selected depth.

If the value is set too high the overshoot will increase and the steering will be unstable.

Contour Cross Angle (CCA)

The CCA is an angle that is added to or subtracted from the set course.

With this parameter you can make the boat yaw around the reference depth with lazy-s movements.

The larger the CCA the bigger yawing will be allowed. If you the CCA set to zero there is no S-ing.




NoDrift mode

This mode combines the autopilot and the positioning information from the GPS.

When NoDrift is activated, the autopilot will draw an invisible bearing line based on current heading from the boat's position.

Unlike in AUTO (compass) mode the autopilot will now use the position information to calculate the cross track error, and automatically keep your track straight.

You can use the port and starboard indicators in the autopilot pop-up or the rotary knob to reset the bearing line while in NoDrift mode.




Dodging

If you need to avoid an obstacle when using NoDrift mode, you can press STBY and power steer or use the helm until the obstacle is passed.

If you return to NoDrift mode within 60 seconds you can select to continue on previous set bearing line.

If you don't respond the dialog will disappear and the autopilot will go to NoDrift mode with current heading as set bearing line.

If your dodging maneuver takes more than 60 seconds, the autopilot will remain in Standby mode.

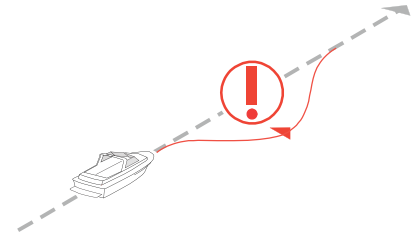

Navigating with the NSS

You can use the autopilot feature to automatically steer the boat to a specific waypoint location, or through a route of waypoints. The position information received from the GPS will be used to change the course to steer to keep the boat on the track line and direct to the destination waypoint.

To obtain satisfactory navigation steering, the NSS must have valid position input. Autosteering must be tested and determined satisfactory prior to entering the NAV mode:



You can start navigation from any panel by pressing the **GO TO / PAGES** key. The go to cursor option will only be available when the cursor is active on a Chart, Radar or Echosounder panel. For more information about navigating with the NSS refer to "Navigating with the NSS" on page 25.

You can also start navigating from the autopilot menu.

When the Navigation mode is initiated, the pilot will automatically keep the vessel on the leg. When your vessel reaches the arrival circle for a waypoint, the pilot will give an audible warning and display an alert screen with the new course information.

If the required course change to the next waypoint is less than the Navigation change limit, the autopilot will automatically change the course. If the required course change to next waypoint in a route is more than the set limit, you are prompted to verify that the upcoming course change is acceptable.


→ **Note:** For more information about navigation parameters and how to navigate with the NSS, refer to "Navigating with the NSS" on page 25.



⚠ Warning: Navigational steering should only be used in open waters. When selecting NAV mode, the pilot maintains the current set course and prompts the user to accept the course change towards the destination waypoint.


The waypoint arrival circle

The Arrival radius defines the point at which a turn is initiated when you are navigating a route.

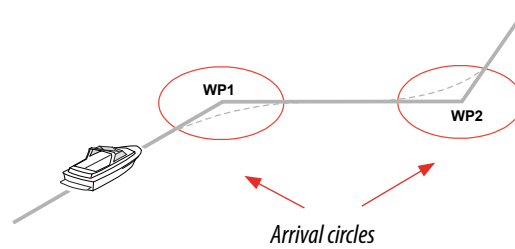

The arrival circle should be adjusted according to boat speed. The higher the speed, the wider the circle. The intention is to make the autopilot start the heading change in due time to make a smooth turn onto the next leg.

The figure below may be used to select the appropriate waypoint circle when creating the route.

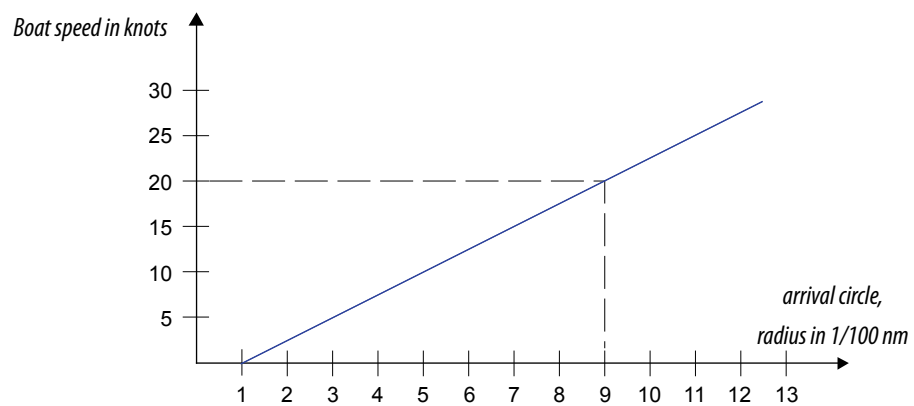

Example: With the speed of 20 knots you should use a waypoint circle with radius 0.09 nm.

- **Note:** The distance between any waypoints in a route must not be smaller than the radius of the waypoint arrival circle when using automatic waypoint shift.

Sailing with the autopilot

Several sailing parameter should be defined before entering Wind or WindNav mode. These parameters are described in the separate installation manual.

Wind vane steering

The WIND mode is only available if the system has been set up for sailboat in the Autopilot Installation menu.

Before the WIND mode is started it must be verified that valid input from wind transducer is available.

Initiate wind steering as follows;

1. Switch the Autopilot to AUTO mode
2. Adjust the boat heading until wind angle is according to the angle you want to maintain
3. Press the **MENU** key, and select Wind




The set course to steer (CTS) and set wind angle are entered from the compass heading and the wind transducer at the moment the WIND mode is selected. From that point the autopilot will change the course to maintain the wind angle as the wind direction may change.

Tacking

- **Note:** The tack function is only available when the system is set up for SAIL boat type. Tacking should only be performed into the wind and must be tried out in calm sea conditions with light wind to find out how it works on your boat. Due to a wide range of boat characteristics (from cruising to racing boats) the performance of the tack function may vary from boat to boat.

You can initiate the tack function both from AUTO and from WIND mode.

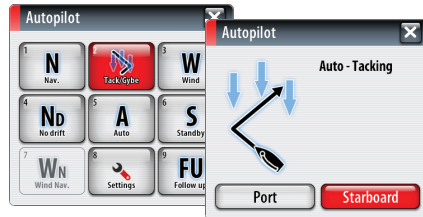

In both modes you can interrupt the tack operation, as long as the tack dialog is open, by selecting the opposite tacking direction. When interrupted the boat will return to the previous set heading.

Tacking in Auto mode

Tacking in AUTO mode is different from tacking in WIND mode. In AUTO mode the tack angle is fixed and as defined by the user.

When tacking direction is selected the autopilot changes the current set course according to the set fixed tacking angle.

Tacking in Wind mode

Tacking in WIND mode as compared to AUTO mode can be performed when sailing with apparent or true wind as the reference. The true wind angle should be less than 90 degrees.

The rate of turn during the tack will be given by the Tack time defined in the sailing parameter setup (refer illustration above). The tack time is also controlled by the speed of the boat to prevent loss of speed during a tack.

When you initiate the tacking, the autopilot will immediately mirror the set wind angle to the opposite side of the bow.

Gybing

Gybing is possible when the true wind angle is larger than 120°.

The time to make a gybe is determined by the speed of the boat to make it as quick as possible within control.


Tack and gybe prevent

You should use the autopilot with care when beating and running.

If the sails are unbalanced when beating, yaw forces from the sails can drive the boat into the wind. If the boat is driven beyond the set minimum wind angle, the thrust from the sails will suddenly disappear and reduces the boat speed. The boat will then be more difficult to steer as the rudder will become less effective.

The tack prevent function in WIND mode has been implemented to avoid such situations. It will react immediately when the apparent wind angle becomes 5° less than the set minimum wind angle, and more rudder will be commanded.

See "Sailing parameters" on page 42 for further information.

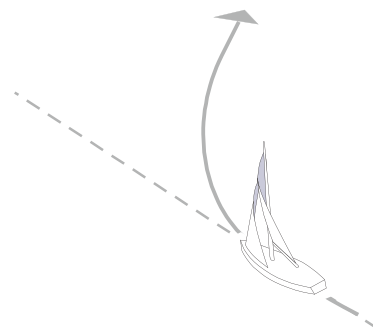

When running, it is difficult to steer the boat with waves coming sideways or from behind. The waves may yaw the boat into an unwanted gybe; this can be hazardous for both the crew and the mast.

The gybe prevent function will be activated when the actual apparent wind angle becomes greater than 175° or gets opposite to the set wind angle. More rudder will be commanded to prevent an unwanted gybe.


The tack and gybe prevent functions are not a guarantee against getting into a hazardous situation. If the effect of the rudder and/or drive unit is not adequate, a dangerous situation may occur. Pay particular attention in such situations.



Wind steering and navigation

In Wind Nav the autopilot steers the boat given both wind data and track data from the NSS navigation function.


In Wind Nav mode the autopilot calculates the initial course change needed to navigate towards the active waypoint, but the pilot will also utilize the current wind direction in the calculation.



Using the NSS in an AP24/AP28 system

Command transfer

If your NSS unit is connected to an autopilot system including an AP24 or AP28 control unit, only one control unit can be active at the same time. An inactive unit is indicated with an envelope symbol in the display.




You can take command from an inactive NSS unit with active autopilot pop-up by turning or pressing the rotary knob.

If the pop-up is not displayed, you can take command from the NSS unit by pressing and holding the STBD/AUTO key to bring up the mode selection menu, and then confirming active mode.

Locking remote stations

The AP24/AP28 includes a Remote Lock function that will disable all other control units. A locked unit is indicated with a key symbol.

When the remote lock function is enabled on AP24/AP28 no transfer of command to NSS or other AP heads on the system can take place, only the active AP control unit stays in command.



You can only unlock the remote stations from the AP24/AP28 unit in command.

Using the autopilot in an EVC system


When the NSS is connected to an EVC system via the SG05, you can take manual control of the steering irrespective of the autopilot mode.

The mode indicator on the pilot pop-up will be replaced by a dash to indicate EVC override.

The system will return to NSS control in standby mode if no rudder command is given from the EVC system within a predefined period.



The autopilot settings panel

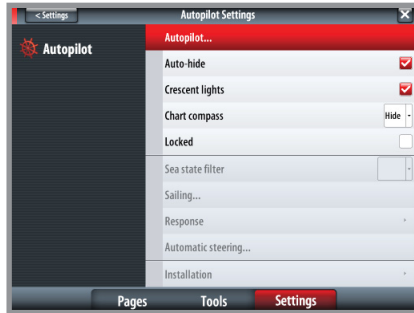

The Autopilot settings panel gives access to settings that might be changed by the user during operation of the autopilot.

For information about installation, see the separate NSS Installation manual.

Auto-hide

Autopilot information is by default shown on top of the pages when the Autopilot pop-up is not displayed. You can select to turn this information off.





Crescent lights

The background lights around the rotary knob can be used to indicate that the NSS is under autopilot control. When toggled on the lights will be red and green when the autopilot is not in standby.

When toggled off the lights will follow day/night light setting.

Chart compass

You can select to show a compass symbol around your boat on the chart panel. The compass symbol will be off when the cursor is active on the panel.



Locking an NSS unit

If two NSS units are included in the system, the non-active NSS unit can be locked to prevent unauthorized operation of the autopilot.

When the unit is locked this is indicated with a lock symbol and with text in the pop up.

When the lock function is in use, no automatic modes can be selected from the NSS unit.

- **Note:** The lock function is not available on the NSS unit which is active as pilot control!
- If the NSS unit is part of an AP24/AP28 system, the unit can be locked from the AP24/AP28 control unit.


Sea state filter

The Seastate filter is used to reduce rudder activity and autopilot sensitivity in rough weather.

- OFF Seastate filter is disabled. This is default
- AUTO Reduces rudder activity and autopilot sensitivity in rough weather by an adaptive process. The AUTO setting is recommended if you want to use the seastate filter
- MANUAL Linked to the steering response control settings described previously. It may be used to manually find the optimum combination of course keeping and low rudder activity in rough but steady sea conditions

Sailing parameters

→ **Note:** Sailing parameter settings are only available if the boat type is set to Sail.



Tack time

When performing a tack in WIND mode, the rate of turn (tack time) can be adjusted. This will give single-handed sailors time to handle the boat and the sails during a tack.

A turn performed without shifting wind side, will also be made at a controlled turn rate.

Range	Change per step	Default	Units
2 - 50	1	12	seconds

Tack angle

This value is used to preset the course change used when tacking in AUTO mode. By pressing the port and starboard indicators in the autopilot pop-up the course will change as much as this value.

Range	Change per step	Default	Units
50 - 150	1	100	°

Wind function

With wind function set to **AUTO**, the autopilot will automatically select between apparent and true wind steering. **AUTO** is default and recommended for cruising.

When the boat is running, it will also be surfing on the waves. This may lead to significant changes in boat speed, and thereby also changes in apparent wind angle. True wind steering is therefore used when running, while steering to apparent wind is used when beating or reaching.

Apparent wind steering is preferred when you want to achieve maximum boat speed. The autopilot tries to maintain a constant apparent wind angle to get maximum thrust from a given trim of the sails.

When sailing in closed waters, the apparent wind angle may change temporarily due to wind gusts. It may then be preferred to sail to the true wind.

VMG optimizing

You can optimize the VMG to wind. When selected, the function will be active for 5–10 minutes after a new wind angle has been set and only when beating.

Layline steering

Layline steering is useful when navigating. Cross Track Error (XTE) from the navigator will keep the boat on the track line. If the XTE from the navigator exceeds 0.15 nm, the autopilot will calculate the layline and track towards the waypoint.

Response


By default the system switches between HI/LO parameter set based on speed (motor boats) or speed and wind (sail boats). You can however select to manually set which parameter set that shall be used.

HI or LO must be selected if no speed input is available.

You can manually fine tune each of the two (HI/LO) parameter sets. Level 4 is default with parameter values as set by the autotune function. If no autotune is made (not recommended) the level 4 values are the factory default values.

A low response level reduces the rudder activity and provides a more “loose” steering.

A high response level increases the rudder activity and provides a more “tight” steering. A too high response level will make the boat start S-ing.



Automatic steering

This option displays an overview of all autopilot steering parameters, and you can adjust parameters if required.

For more details, refer to the separate AC12/AC42 Installation manual.

Installation

Used for autopilot installation and commissioning. See the separate AC12/AC42 or SC05 Installation manual.




7

Using the radar

The radar panel can be set up as a full screen view or combined with other panels. The radar image can also be displayed as an overlay to existing 2D chart views and 3D for Navionics. Refer to “Charts” on page 14.

→ **Note:** Radar overlay requires data from heading sensor.

The radar panel

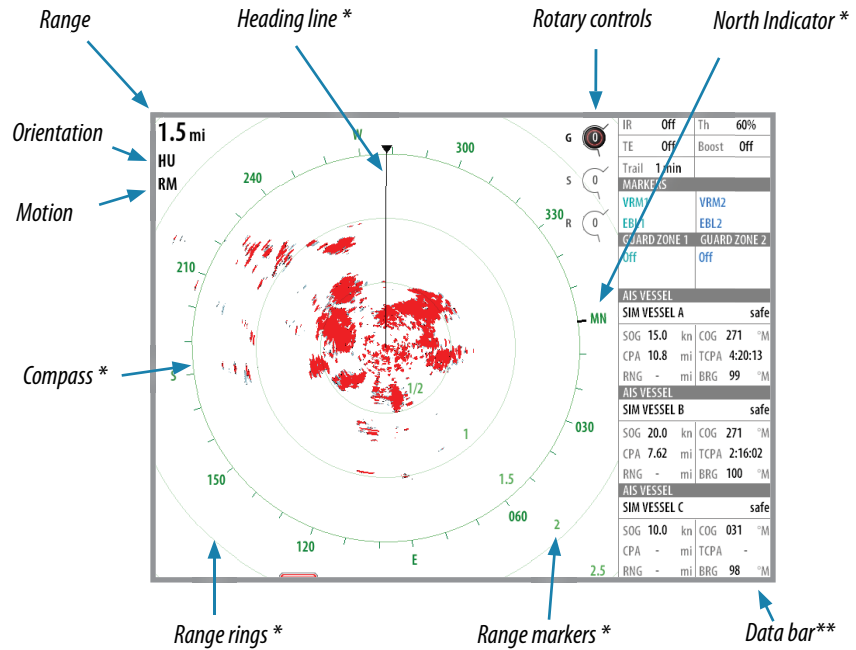

* Optional radar symbology.

** Only available on NSS8 and NSS12.

Radar symbology can be turned ON/OFF collectively from the Radar menu, or individually as described in “Radar settings panel” on page 51.

The radar operational modes

The radar’s operational modes are controlled from the NSS unit. The following modes are available:

Off

The power to the radar scanner is turned off

Standby

The power to the radar scanner is on, but the radar is not transmitting.

Transmit

The scanner is on and transmitting. Detected targets will be drawn on the radar PPI (Plan Position Indicator).


Using the cursor on the radar panel

The cursor is by default not shown on the radar image.

When you tap the radar panel the cursor and the cursor position window will be activated.

The cursor can be used to measure a distance to a target, and to select targets as described later in this section.

To remove the cursor and cursor elements from the panel, press the **Clear cursor** panel key or the **X** key.




Clear cursor

Optimizing the radar image

You may be able to improve the radar image by adjusting the radar sensitivity, and by filtering out the random echoes from sea and weather conditions.

You select between the control images by tapping the image or by pressing the rotary knob. Active control will expand and display its name in full. You can then adjust the value by turning the knob or by a vertical dragging movement on the control you want to adjust.

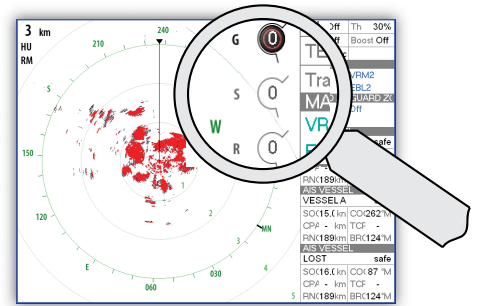

Gain

The gain controls the sensitivity of the radar receiver.

A higher gain makes the radar more sensitive to radar returns, allowing it to display weaker targets. If the gain is set too high, the image might be cluttered with background noise.

Gain has a manual and an automatic mode. You cycle through the modes by pressing and holding the rotary knob. You can only adjust the gain value in manual mode by turning the rotary knob or vertical dragging movement over the gain control.

Sea clutter

Sea clutter is used to filter the effect of random echo returns from waves or rough water near the vessel.

When you increase Sea Clutter filtering the on-screen clutter caused by the echoes of waves will be reduced.

A long-press on the rotary knob will cycle through available Sea clutter modes. You can only adjust the sea clutter value in manual mode by turning the rotary knob or vertical dragging movement over the sea clutter control.

Rain Clutter

The Rain clutter is used to reduce the effect of rain, snow or other weather conditions on the radar image.

Adjust value by turning the rotary knob or vertical dragging movement over the rain clutter control.


The value should not be increased too much as this may filter out real targets.

Rejecting radar interference

Interference could be caused by radar signals from other radar units operating in the same frequency band.

A high setting will reduce the interference from other radars.

In order to not miss weak targets, the interference rejection should be set low when no interference exists.




Positioning the radar center

You can move the radar PPI center to different positions within the radar panel, and select how your vessel symbol moves on the radar image.

Radar motion is indicated on the upper left corner of the radar panel as either TM (True motion) or RM (Relative motion).

The radar position can only be changed when the radar is transmitting.



Center

Default setting. The radar PPI center is centered on the radar panel.


Look Ahead

Moves the radar PPI center to the bottom of the panel to give maximum view ahead.

Offset

Allows you to move the PPI center to any location on the radar panel.


1. Select the offset option from the menu
2. Tap the screen where you want to position the radar center
3. Confirm the setting by tapping the **SAVE OFFSET** key on top of the screen or by pressing the **MENU** key

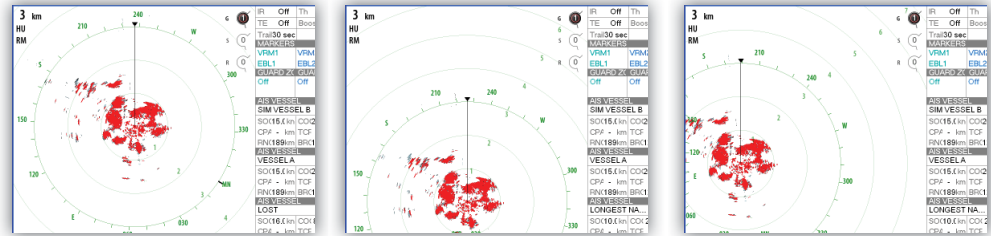

Center

Look ahead

Custom offset



True motion

In True motion your vessel, and moving targets, move across the Radar screen as you travel. All stationary objects remain in a fixed position. When the vessel's symbol reaches the edge of the screen, the radar image will be redrawn with the vessel symbol re-positioned in center of the screen.


When True motion is selected, the menu will expand to include a reset true motion option. This allows for manually resetting the radar image and vessel symbol to screen center.

Measuring range and bearing to a target

Using the cursor

The cursor is by default not shown on the radar image.

When you tap the radar panel the cursor will be visible, and the cursor position window will be activated, showing range and bearing from your vessel to cursor position.



Range rings

The range rings are displayed at preset distances from the vessel based on the radar range. You can use the range ring to estimate the distance to a radar echo.


EBL/VRM


The electronic bearing line (EBL) and variable range marker (VRM) allows quick measurements of range and bearing to vessels and landmasses within radar range. Two different EBL/VRMs can be placed on the radar image.

The EBL/VRM is by default positioned from the center of the vessel. It is however possible to offset the reference point to any selected position on the radar image.

You can position EBL/VRM by using the cursor, and edit the marker position as described below.

When positioned, you can quickly turn the EBL/VRM on/off by tapping the relevant markers on the data bar.



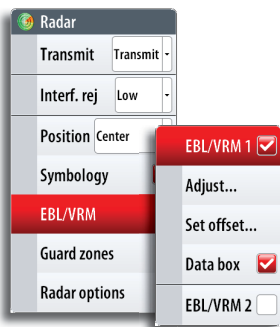


Defining an EBL/VRM marker

1. Ensure that the cursor is not active on the radar panel (press the **X** key)
2. Activate the menu
3. Select one of the EBL/VRM markers
4. Select adjustment method, and tap the screen to adjust the marker
5. Tap the panel key to save the marker position

When positioned, you can quickly turn the EBL/VRM on/off by tapping the relevant section on the data bar (NSS8 and NSS12 only).

Trail	1 min	Trail	1 min
MARKERS			
VRM1		VRM2	
EBL1		EBL2	
GUARD ZONE 1		GUARD ZONE 2	
Off		Off	



Quick EBL/VRM marker positioning by using the cursor

1. Tap the radar panel to position the cursor
2. Activate the menu
3. Select one of the EBL/VRM markers
 - The EBL line and the VRM circle will be positioned according to the cursor position
4. If required, tap the panel to reposition the marker
5. Press **Save EBL/VRM** panel key or activate the menu to save the position


Setting a guard zone around your vessel

A guard zone is an area (either circular or a sector) that you can define on the radar image. When activated, an alarm will alert you when a radar target enters or exits the zone.



Defining a guard zone

1. Activate the menu
2. Select one of the guard zones
3. Select shape
4. Select **Adjust** to position the zone, and tap and drag on the screen or use the rotary knob to adjust range, depth, bearing and width
5. Save the position by tapping the panel key or by activating the menu



When positioned, you can quickly turn the guard zones on/off by tapping the relevant section on the data bar (NSS8 and NSS12 only).

Alarm settings

An alarm will be activated when a radar target breaches the guard zone limits. You can select if the alarm will be activated when the target enters or exits the zone.

Sensitivity

The guard zone sensitivity can be adjusted to eliminate alarms for small targets.

Radar options

The radar threshold

The threshold sets required signal strength for the lowest radar signals. Radar returns below this limit will be filtered and not displayed.

Default value: 30%.

Target boost

The target boost option is used for increasing the size of radar targets.




Target expansion

Target expansion will override and increase the default radar pulse length, providing larger target returns.

Target trails

You can define how long time the trail that each target leaves should remain on your radar panel. You can also turn OFF target trails.

→ **Note:** True motion is recommended when using Target trails



Clearing target trails from the panel

When target trails are displayed on the panel, the radar menu will be expanded to include an option where you can clear target trails from your radar panel temporarily. The target trails will start to appear again unless you switch them off as described above.

The radar palette

Different colors (palettes) can be used to represent detail on your radar panel.

Radar orientation

Radar orientation is indicated on the upper left corner of the radar panel as either HU (Heading UP), NO (North Up) or CU (Course up).



Heading up

Rotates the radar image to display the current heading directly up on the radar image.

North up

Rotates the radar image with the north direction upwards.

Course up

Rotates the radar image to display the current navigation course directly up.

This option works only when the NSS is navigating an active route. If you are not navigating an active route the heading up orientation will be used until the navigation function is started.

Fast scan

(Broadband Radar™ only).

Increases the speed of the radar scanner when the range is set to 2 nm or less. This option gives faster updates on target movements within this range.

STC curve

(Broadband Radar™ only).

The STC (Sensitivity Time Control) controls the sensitivity of the radar signal close to your vessel. Your selection should be based on the current sea conditions.

MARPA targets

If the NSS includes a heading sensor, the MARPA function (Mini Automatic Radar Plotting Aid) can be used to track up to ten radar targets.

You can define alarms to notify you if a target gets too close. Refer “MARPA target settings” on page 49.


MARPA tracking is an important tool for collision avoidance.

→ **Note:** MARPA requires heading data for both the radar and the NSS .

MARPA target symbols

The NSS system use the target symbols shown below.


Symbol	Description
	Acquiring MARPA target. Typically it takes up to 10 full rotations of the scanner
	Tracking MARPA target, not moving or at anchor.
	Tracking and safe MARPA target with extension lines.
	Dangerous MARPA target. A target is defined as dangerous based on the CPA, TCPA and AIS Range settings. Refer “Vessel alarm settings” on page 50.
	When no signals have been received within a time limit a target will be defined as lost. The target symbol represents the last valid position of the target before the reception of data was lost.
	Selected MARPA target, activated by tapping on the target icon. The target will return to default target symbol when the cursor is removed.



Tracking MARPA targets

1. Tap on the target on the radar panel
2. Select **Acquire targets** from the menu
3. Repeat process for more targets

Once your targets are identified, it may take up to 10 radar sweeps to acquire and then track the target.

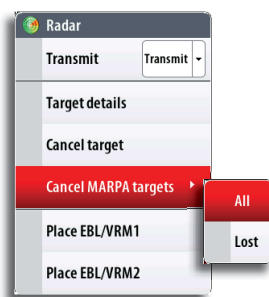

Cancelling target tracking

When targets are being tracked, the radar menu will expand to include options for cancelling individual targets or to stop the tracking function.

Cancel tracking individual targets by tapping the icon before activating the menu.

Viewing target information

Basic target information can be shown in the data bar.

You can also use the Tools pages to view information about targets. See page 79 .



MARPA target settings

Several vessel settings define alarm limits and how the targets are displayed on your radar image.

Target trails and safe rings

You can define the length of the MARPA trail making it easier to follow target movement.

A circle can be added around the MARPA target to present the danger zone. Refer “Defining dangerous vessels” on page 50.

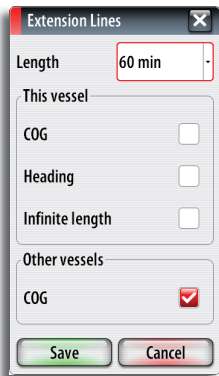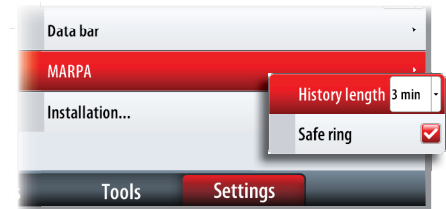


The vessels extension lines

Sets the length of the extension lines for your vessel and for other vessels.

The length of the extension lines is either set as a fixed distance, or to indicate the distance the vessel will move in the selected time period.


Defining dangerous vessels

You can define dangerous vessels based upon CPA (Closest Point of Approach) or TCPA (Time to Closest Point of Approach). When your vessel comes within this distance from a vessel, the symbol will change to the “dangerous” target symbol. An alarm will be triggered if activated in the Alarm settings panel.

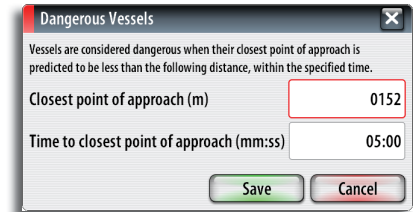

Vessel alarm settings

You can define several Vessels alarms to alert you if a target comes within predefined range limits, or if a previously identified target is lost.

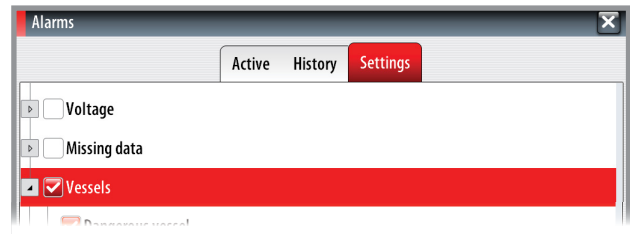


Alarm ID	Description
Dangerous vessel	Controls whether an alarm shall be activated when a vessel comes within the predefined CPA or TCPA. See Defining dangerous vessels above. → Note: The check box controls whether the alarm pop-up box is displayed and if the siren will sound. The CPA and TCPA defines when a vessel is dangerous regardless of the enabled/disabled state.
MARPA target lost	Controls whether an alarm shall be activated when a MARPA target is lost
MARPA unavailable	Controls whether an alarm shall be activated if you do not have the required inputs for MARPA to work (valid GPS position and heading sensor connected to the radar server)

Radar overlay

You can overlay the Radar image on the Chart. This can help you to easily interpret the radar image by correlating the radar targets with charted objects.

When the radar overlay is selected, basic radar operational functions are available from the Chart panel’s menu.

Radar settings panel

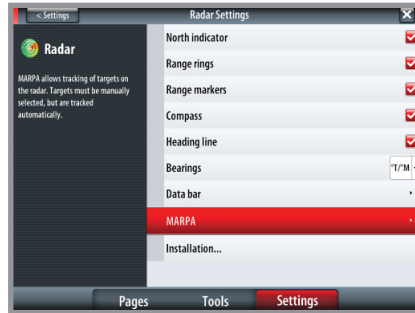

Radar symbology

You can turn on/off optional radar symbology individually from the Radar settings page. See illustration showing optional radar items on page 44.




Data bar

Turns on/off the radar data bar. Refer illustration on page 44.

The data bar can show up to 3 targets, arranged with the closest target on top. You can select to show MARPA targets on top and before any AIS targets, even if the AIS targets are closer to your vessel.

→ **Note:** The data bar is only available on NSS8 and NSS12.



SIM VESSEL A				danger	
SOG	15.0	kn	COG	271	°M
CPA	25.9	m	TCPA	0:00:57	
BRG	0.23	nm	BRG	94	°M
SIM VESSEL C				safe	
SOG	10.0	kn	COG	031	°M
CPA	-	nm	TCPA	-	
BRG	0.74	nm	BRG	24	°M

MARPA settings

Allows for adding target trails and guard zone indication around a MARPA target. Refer to description on previous pages.

Installation

The Installation option is used for Radar installation, described in the separate NSS Installation manual.


8

The echosounder

The echosounder function provides a view of the water and bottom beneath your vessel, allowing you to detect fish and examine the structure of the sea floor.


The echosounder displays the water column moving from right to left on the panel.

You can select between single panel view and several split views as described later in this chapter.

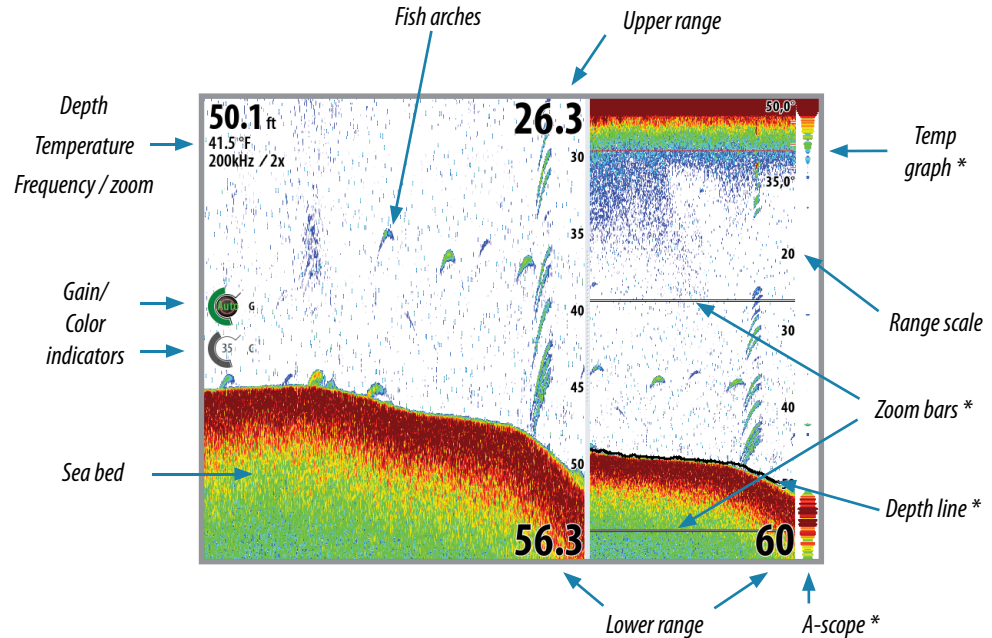

* Optional echosounder image items

→ **Note:** You turn the optional echosounder images on/off individually. See “The echosounder settings panel” on page 57.



Setting up the echosounder panel

The echosounder panel is setup from the panel’s main menu.

The range

The range setting determines the water depth that is visible on the screen.

Auto range

If you select Auto, the system will automatically display the whole range from the water surface to the bottom.


Preset range levels

You can select between several preset range levels.

Custom range

This option allows you to manually set both upper and lower range limits.

The echosounder panel can be setup as a single view, or with split view where the left and the right side presents different images.




Split screen options

Zoom

The Zoom mode presents a magnified view of the sounder image on the left side of the panel. By default the zoom level is set to 2x. You can select up to 8x zoom from the drop-down menu.

The range zoom bars on the right side of the display shows the range that is magnified. If you increase the zooming factor the range will be reduced. You will see this as reduced distance between the zoom bars.

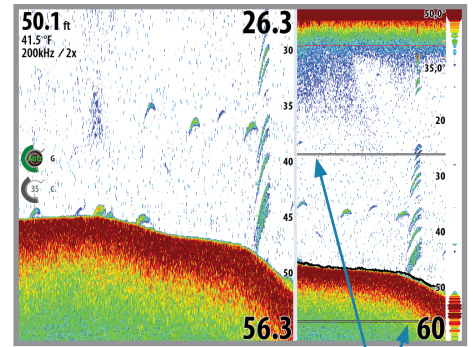


Zoom bars

Bottom lock

The bottom lock mode is useful when you want to view echoes close to the bottom.

In this mode the left side of the panel shows an image where the bottom is flattened. The range scale is changed to measure from the seabed (0) and upwards. The bottom and the zero line will always be shown on the left image, independent on range scale.


The scaling factor for the image on the left side of the panel is adjusted as described for the Zoom option.

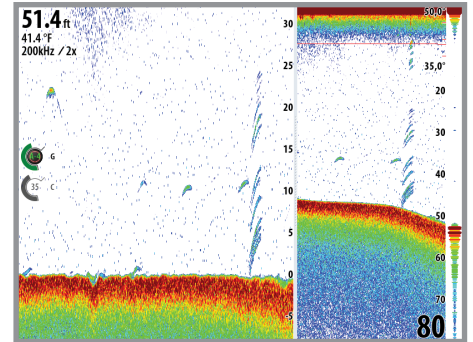

Echo frequency

The NSS unit supports several transducer frequencies. Available frequencies depend on sounder module and which transducer model is connected.

You can view two frequencies at the same time by setting up a dual echosounder

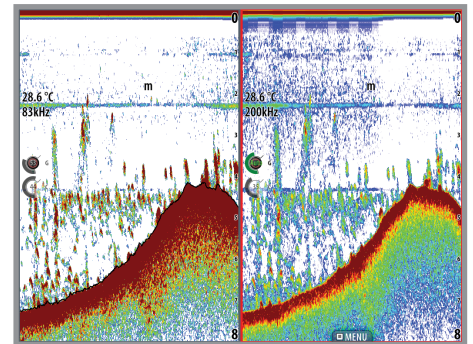

Noise rejection

Signal interference from bilge pumps, engine vibration and air bubbles can clutter the image. The noise rejection option filters the signal interference and reduces the on-screen clutter..

The scroll speed

You can select the scrolling speed of the echosounder image on the screen. A high scroll speed will update the image fast, while a low scroll speed will present a longer history.



Zooming


You can use the **IN / OUT** keys to select zooming level on the Echosounder image.

Zoom level is shown on the upper left side of the echosounder the panel.


When zooming in, the sea floor will be kept near to bottom of the screen, irrespective of whether it is in auto-range or manual range.

If the range is set considerably less than the actual depth, the unit will not be able to find the bottom when zooming.

If the cursor is active, the unit will zoom in where the cursor is pointed.



Adjusting color and gain settings



Gain

The gain controls the sensitivity of the echosounder.

The more you increase the gain, the more details will be shown on the image. However, a higher gain setting may introduce more background clutter on the image. Conversely, if the gain is set too low weak echoes may not be displayed.

Auto gain

The Auto gain option will keep the sensitivity at a level that works well under most conditions. With the gain in auto mode, you can set a positive or negative offset that gets applied to the auto gain. This is indicated as A-40 - A40.

Color

Strong and weak echo signals have different colors to indicate the different signal strengths. The colors used depend on which palette you select.


The more you increase the Color setting, the more echoes will be displayed in the color at the strong return end of the scale.

Adjusting the Gain and Color settings

Gain and Color are adjustable by using the rotary knob.

You select between Gain and Color by pressing the rotary knob. The active control will expand and display its name in full. You can then adjust the value by turning the knob.

If you press and hold the rotary knob when Gain is selected, you switch between Auto and Manual gain option.

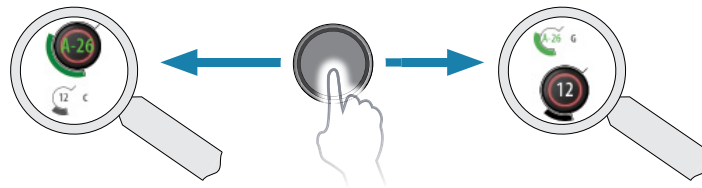

If no adjustments are made within 3 seconds the controls will return to default size.

Using the cursor on the echosounder panel

The cursor is by default not shown on the sounder image.

When you tap the screen the cursor will appear and the depth at the cursor position will be shown, the information window and the history bar will be activated.

Clear cursor

To remove the cursor and cursor elements from the panel, press the **Clear cursor** panel key or the **X** key.


Viewing sounder history

Whenever the cursor is shown on a sounder panel, the red scroll bar is also shown. The scroll bar shows the image you are currently viewing in relation to the total echosounder image history stored.

The scroll bar on the far right side indicates that you are viewing the latest soundings. If you position the cursor to the left side of the screen, the history bar will start scrolling towards left, and the automatic scrolling as new soundings are received will be turned off.

You can pan the image history by dragging left/right on the screen.


To resume normal scrolling, tap the **Clear cursor** panel button or press the **X** key.



Placing a mark on an echosounder image

You can position a mark at the vessel's position by pressing and holding the **MENU** key. You can position a mark on a selected echosounder item by tapping the screen and then activating the menu.


→ **Note:** Only marks positioned by using the cursor will include depth information.



Measuring distance

The cursor can be used to measure the distance between the position of two observations on the sounder image. It is easier to use the measure function when the sounder image is paused.

1. Activate the menu to start the measure function
 - The cursor will be positioned in the middle of the panel, and the distance will be measured from this position
2. Tap on the screen to select the second measuring point
 - A line will be drawn between the measuring points, and the distance will be listed in the Information window

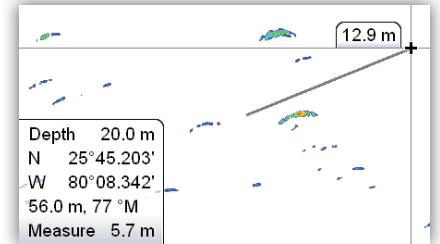

3. Continue tapping the screen to position new measuring points

When you press the **Finish measuring** panel button or the **X** key the echosounder will resume to normal scrolling.

Pausing the echosounder

You can pause the sounder, allowing you to examine the sounder echoes. The function is activated from "The echosounder settings panel", see page 57.

This function is useful when you need to position a waypoint exactly on the echosounder panel, and if you are using the cursor to measure a distance between 2 elements on the image.

Recording the echosounder data

You can record echosounder data and save the file internally in the NSS unit, or on to a Micro-SD card inserted into the unit's card reader.

The function is activated from "The echosounder settings panel", see page 57.

The following options are available:

Bytes per sounding

Select how many bytes per seconds that are to be used when saving the log file. More bytes yield better resolution, but will cause the record file to increase in size compared to using lower byte settings.

Log all channels


Logs all available sonar data simultaneously.

When logging all channels, logs are saved in SL2 format instead of .slg format.


Log in XTF format

Optional logging format for SideScan data. This will only be available when a StructureScan unit is connected.

This format does not log all channels into one file. The format is used for third part application support on the PC (like SonarWiz) that need access to the StructureScan data.

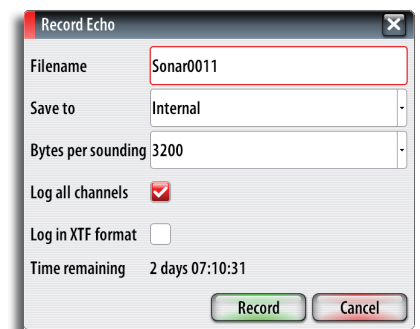

When the echosounder image is being recorded, there will be a flashing red symbol and a message will appear periodically at the bottom of the screen.

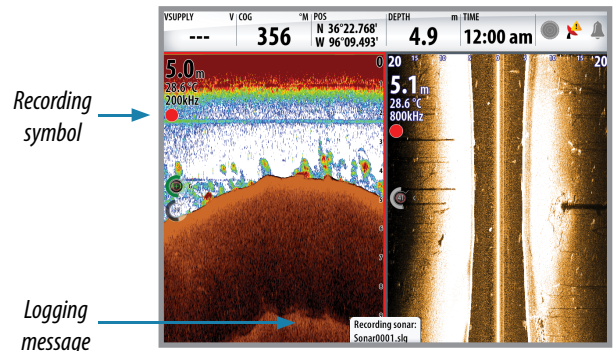

The graphics shows that both conventional echosounder and StructureScan data are being logged

The sounder recording is stopped by re-selecting the Record function.



Viewing the recorded sounder data



Both internally and externally stored sounder records may be reviewed when selected.

The log file is displayed as a paused image, and you control the scrolling and display from the replay menu.

You can use the cursor on the replay image, and pan the image by tapping and dragging on the screen as on a normal echo image.

If more than one channel was recorded in the selected echo file, you can select which channel to display.

You exit the replay mode by pressing the X key or the X symbol in the upper right corner.

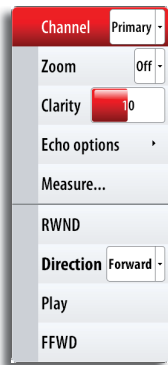


Echo options

Palettes


Several display palettes with varying degrees of color and brightness are available.

Bottom coloring

The bottom coloring option colors the entire bottom and hard structure in bottom area in one brown shade. This will clearly separate fish and vegetation from the bottom.





No bottom coloring



Bottom coloring ON


Optional echosounder image items

Echosounder images can be turned on/off individually. Refer graphics on page 52.

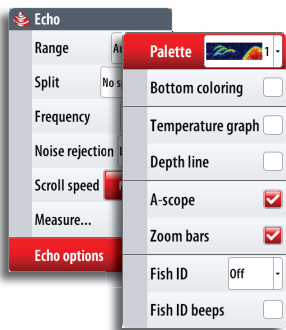


The fish echoes


You can select how you want the echoes to appear on the echosounder image.



Traditional fish echoes



Fish symbols and depth indication

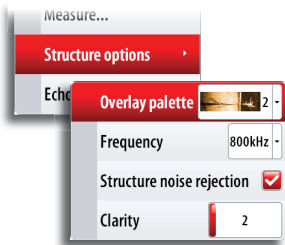

StructureScan™ overlay

When a StructureScan unit is connected to your NSS system, you can overlay a DownScan image on the regular echo image.


When activated as described below, the echosounder menu will expand to include basic StructureScan options.

Gain for both images can be adjusted as described on "Adjusting color and gain settings" on page 54.

For more information about StructureScan, see "StructureScan™" on page 58.



The echosounder settings panel

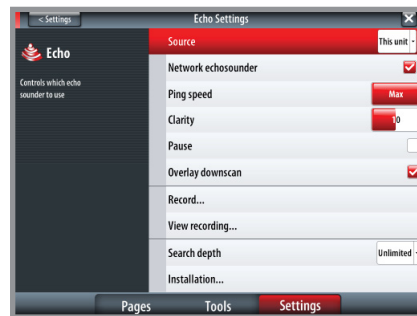

The echosounder source

If you have more than one echosounder on your network, you can select which sounder to be the preferred source on this NSS unit.

Network echosounder

You can share the echosounder connected to this NSS unit on the network

For more information about how to setup echosounders, refer to the separate NSS Installation manual.

The ping speed

The Ping Speed controls the rate the transducer transmits into the water. A high ping speed will make the image move fast on the screen, while a low ping speed will present a longer history on the screen. The reverberation potentially caused by too high ping speed can cause interference on the screen.

Clarity

Wave action, boat wakes and temperature inversion can cause on-screen clutter near the surface.

The surface clarity option reduces surface clutter by decreasing the sensitivity of the receiver near the surface.

Pausing the echosounder

Refer page 55.

Overlay downscan

When a StructureScan unit is connected to your NSS system, you can overlay DownScan images on the regular echo image.

When activated, the echosounder menu will expand to include basic StructureScan options. See "StructureScan™ overlay" described previously.

Recording and viewing the echosounder data

See page 55.

Search depth

Noise may cause the echosounder to search for unrealistic depths.

By adjusting the search depth you can avoid that such conditions interfere normal echosounder operation.



9

StructureScan™

StructureScan™ is an optional hardware module that uses high frequency to provide a High resolution image of the seabed

StructureScan™ provides a 150 m (480 ft) wide coverage in high detail with SideScan, while the DownScan™ provides picture perfect images of structure and fish directly below your boat, down to 90 m (300 ft).

The StructureScan™ panel is accessed from the shortcut icon on the **Pages** panel when the StructureScan external box and transducer are fitted.

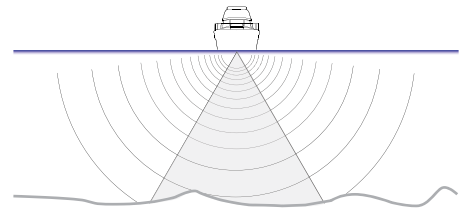


Setting up the StructureScan™ image

The view


The StructureScan panel can be set up as a traditional downscan image, or showing left/right side scanning.

The DownScan image can also be added as an overlay to the traditional Echosounder image. For more information, refer to "StructureScan™ overlay" on page 56.

DownScan

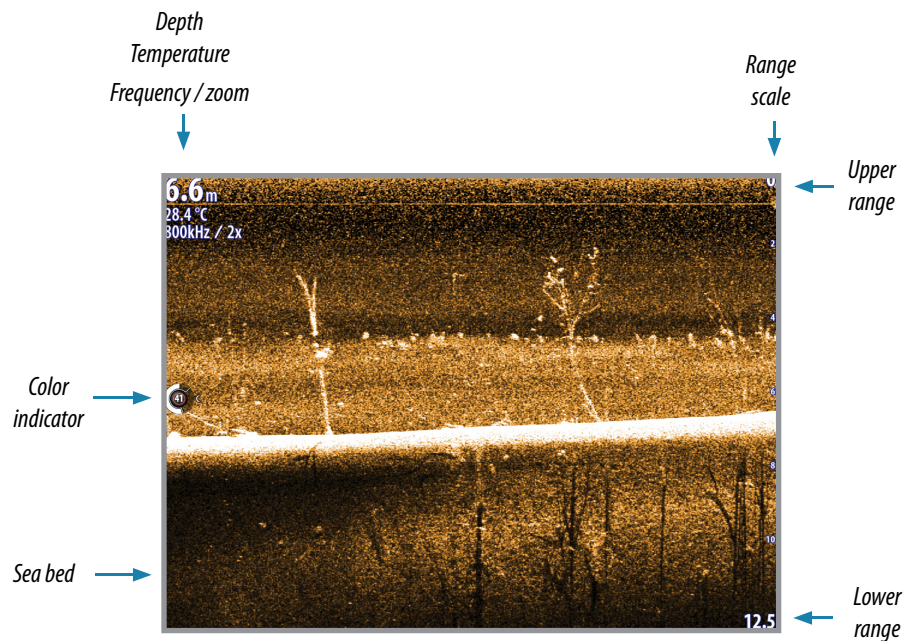

SideScan

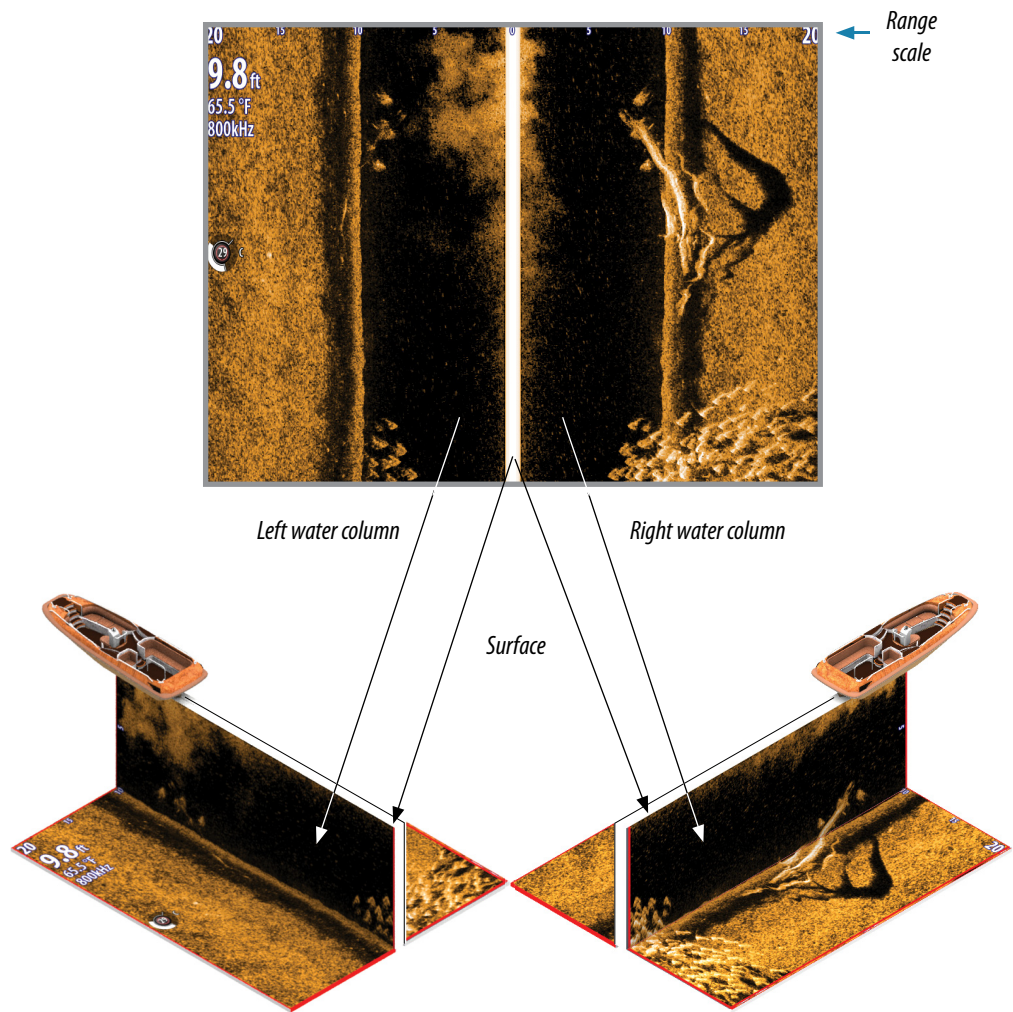

The range

The range setting determines the water depth that is visible on the screen.

Auto range

When the range is set to Auto the system will automatically set the range depending on the water depth.

Preset range levels

You can select between several preset range levels.

When manually changing the range the upper depth line will always be at the water surface. This options allows you to focus on echoes at the upper part of the water column.

StructureScan™ Frequencies

StructureScan supports two frequencies. 455 kHz is ideal for greater depth penetration and while 800 kHz provides better definition especially at shallower depths.

Zooming

You can use the **IN** / **OUT** keys to select zooming level on the StructureScan image.

Zoom level is shown on the panel.



DownScan image

When zooming in on a DownScan image, the sea floor will be kept near to bottom of the screen, irrespective of whether it is in auto-range or manual range.

If the range is set considerably less than the actual depth, the unit will not be able to find the bottom when zooming.

If the cursor is active, the unit will zoom in where the cursor is pointed.

SideScan image

Zooming on a SideScan image acts as for DownScan, except that it zooms on the surface rather than trying to keep the sea floor in view.

When the cursor is active, it will zoom where the cursor is pointed.

Adjusting the color settings

Strong and weak echo signals have different colors to indicate the different signal strengths. The colors used depend on which palette you select.

The more you increase the Color setting, the more echoes will be displayed in the color at the strong return end of the scale.


Color is adjustable by using the rotary knob. When you press the knob the color control image will expand and display it's name in full. You can then adjust the value by turning the knob. If no adjustments are made within 3 seconds the control will return to default size.



Using the cursor on the StructureScan™ panel

The cursor is by default not shown on the StructureScan image.

When you tap the screen the cursor will appear. The left/right distance from the vessel to the cursor are shown at the cursor position, and the information window and the history bar will be activated.



Clear cursor

To remove the cursor and cursor elements from the panel, press the **Clear cursor** panel key or the **X** key.

Viewing StructureScan history

Whenever the cursor is active on a StructureScan panel, the red scroll bar is also shown. The scroll bar shows the image you are currently viewing in relation to the total StructureScan image history stored.

Depending of the view selected, the scroll bar is on the far right side (DownScan) or at the bottom of the screen (SideScan).

You can pan the image history by dragging up/down (SideScan) or left/right DownScan.

To resume normal StructureScan scrolling, tap the **Clear cursor** panel button or press the **X** key.


Placing a mark on a StructureScan™ image

You can position a mark at the vessel's position by pressing and holding the **MENU** key.

You can position a mark on a selected echosounder item by tapping the screen and then activating the menu.



→ **Note:** Only marks positioned by using the cursor will include depth information.




Measuring distance

The cursor can be used to measure the distance between two observations on the StructureScan image. It is easier to use the measure function when the sounder image is paused.

1. Activate the menu to start the measure function
 - The cursor will be positioned in the middle of the panel, and the distance will be measured from this position
2. Tap on the screen to select the second measuring point
 - A line will be drawn between the measuring points, and the distance will be listed in the Information window
3. Continue tapping the screen to position new measuring points


When you press the **Finish measuring** panel button or the **X** key the echosounder will resume to normal scrolling.



Pausing StructureScan™

You can pause the StructureScan, allowing you to examine the structures and other images in more depth and detail.

This function is useful when you need to position a waypoint exactly on the Structurescan image, and if you are using the cursor to measure a distance between 2 elements on the image.

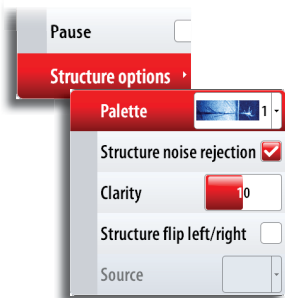

Recording the StructureScan™ data

You can record StructureScan data and save the file internally in the NSS unit, or onto a Micro-SD card as described in "Recording and viewing the echosounder data" on page 57.

Structure options

Structure palette

Several display palettes with varying degrees of color and brightness are available.

Structure noise rejection

Signal interference from bilge pumps, engine vibration and air bubbles can clutter the StructureScan image.

The noise rejection option filters the signal interference and reduces the on-screen clutter.

Clarity

Wave action, boat wakes and temperature inversion can cause on-screen clutter near the surface.

The clarity option reduces surface clutter by decreasing the sensitivity of the receiver near the surface.

Flipping Left/Right image

If required, the left/right SideScanning images can be flipped to match the corresponding side of your vessel.

The Structure source


If you have more than one StructureScan on your network, you can select which unit to be the preferred source on this NSS unit.

10

The Instruments panels

The instrument panels consists of multiple gauges - analog, digital and bar - that can be customized to display selected data. The instrument panel displays data on dashboards, and you can define up to ten dashboards within the instrument panel.


→ **Note!** To include fuel/engine information, engine and tank information has to be setup from the Settings panel.




The dashboards

Three dashboard layouts are predefined to display gauges showing information about vessel, navigation information and angler requirement.


You switch between a panel's dashboards by tapping the left and right side of the panel, or by selecting the dashboard from the menu.



Vessel dashboard



Navigation dashboard



Angler dashboard

→ **Note:** Additional dashboards can be activated. Refer "Changing system settings", "Advanced" on page 83.

Customizing the Instrument panel

You can customize the Instrument panel by changing the data for each of the gauges in the dashboard, by changing the dashboard layout, and by adding new dashboards. You can also set limits of analog gauges.

All edit options are available from the Instrument panel menu.

Available editing options will depend on which data sources that are connected to your system.



Edit an Instrument dashboard

Select the dashboard you want to edit, then;

1. Activate the menu
2. Select the edit option
3. Tap and hold on the gauge you want to change. The selected gauge will have a red outline
4. Select info to display

Save your changes by using the menu or by tapping the **Finish editing** panel button.

You can also use the rotary knob to select menu item and gauges.

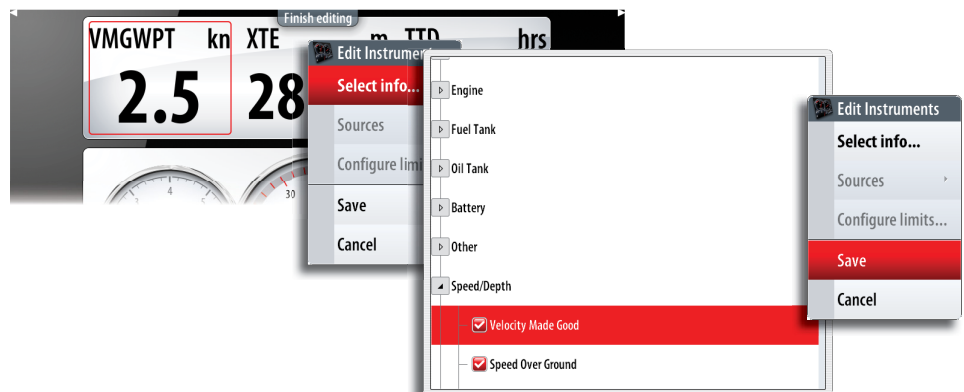


11

Using AIS


If an AIS device is connected, any targets detected by this devices can be displayed and tracked. You can also see messages and position for DSC transmitting devices within range.

AIS targets can be displayed as overlay on radar and chart images, and this feature is an important tool for safe travelling and collision avoidance.

You can define alarms to notify you if an AIS target gets too close or if the target is lost.

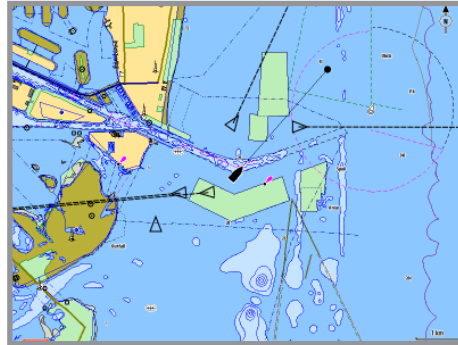

AIS vessels on a chart panel

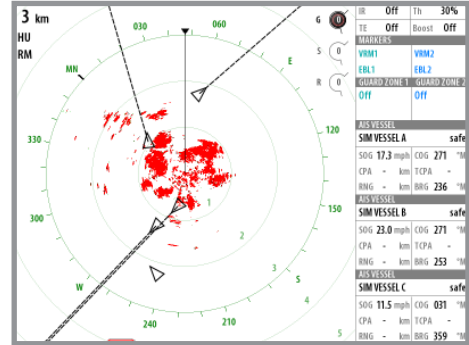

AIS vessels on a radar panel

Target symbols

The NSS system use the AIS target symbols shown below:


Symbol	Description
	Sleeping AIS target (not moving or at anchor).
	Moving and safe AIS target with course extension line.
	Dangerous AIS target, illustrated with bold line. A target is defined as dangerous based on the CPA and TCPA settings. Refer "Defining dangerous vessels" on page 66.
	Lost AIS target. When no signals have been received within a time limit a target will be defined as lost. The target symbol represents the last valid position of the target before the reception of data was lost.
	Selected AIS target, activated by tapping on a target symbol. The target will return to default target symbol when the cursor is moved.


Viewing information about AIS targets

Selecting single AIS targets

When you tap an AIS icon on the chart or radar panel the symbol will change to Selected target symbol, and the vessel name will be displayed.

You can display detailed information for a target by activating the menu when the target is selected.





Viewing information about all AIS targets

Chart pages


You can view information about all AIS targets within range of your vessel from the menu.



Radar pages

The data bar includes information about up to 3 AIS targets.


The targets are listed with the closest target on top, and are color coded to indicate target status.



→ **Note:** Data bar is not available on NSS7.


Vessel alarms

You can define several alarms to alert you if a target comes within predefined range limits, or if a previously identified target is lost.

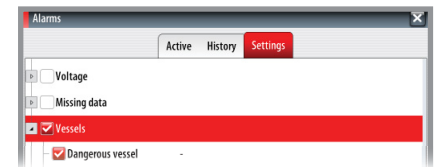

Alarm ID	Description
Dangerous vessel	Controls whether an alarm shall be activated when a vessel comes within the predefined CPA or TCPA. See “Defining dangerous vessels” on page 66. → Note: The check box controls whether the alarm pop-up box is displayed and if the siren will sound. The CPA and TCPA defines when a vessel is dangerous regardless of the enabled/disabled state.
AIS vessel lost	Sets the range for lost vessels. If a vessel is lost within this range this will trigger an alarm
Vessel message	Controls whether an alarm shall be activated when a message is received from an AIS target

The vessel settings panel

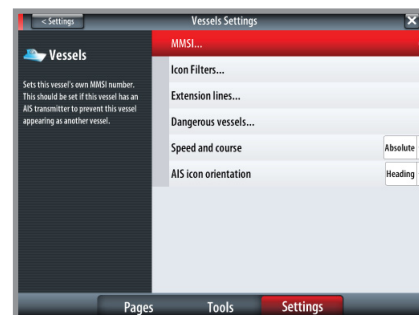

Your vessel's MMSI number

You need to have your own MMSI (Maritime Mobile Service Identity) number entered in the NSS system to be able to receive addressed messages from AIS and DSC vessels.



It is also important to have the MMSI number entered to avoid seeing your own vessel as an AIS target on the chart.

→ **Note:** The Vessel message option in the alarm settings must be toggled on if any MMSI message shall be displayed.

Filtering the targets

All targets are by default shown on the display if an AIS device is connect to the NSS system.

You can select to not show any targets, or to filter the icons based on security settings, distance and vessel speed.

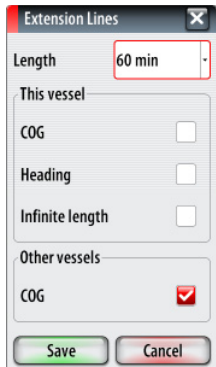


The vessels extension lines

The length of the extension lines for your vessel and for other vessels can be set by the user.

The length of the extension lines is either set as a fixed distance, or to indicate the distance the vessel will move in the selected time period.


For own vessel heading information is read from active heading sensor, and COG information is as received from the active GPS.

For other vessels COG data is included in the message received from the AIS system.



Defining dangerous vessels


You can define an invisible guard zone around your vessel. When a target comes within this distance from your vessel, the symbol will change to the "dangerous" target symbol. An alarm will be triggered if activated in the Alarm settings panel.

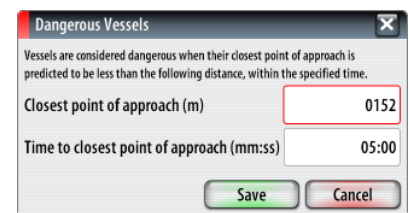


Speed and course indication

The extension line can be used to indicate speed and course for targets; either as absolute (true) motion in the chart or relative to your vessel.

Different line style is used on the extension lines to indicate motion as shown below.



Absolute motion



Relative motion

AIS icon orientation

Sets the orientation of the AIS icon; either based on heading or COG information.

12


Audio

When the NSS is connected to a SonicHub server you can use your unit to control audio playback from iPod, iPhone, USB mass storage device (mp3) and AM/FM radio. Before playing FM radio through the SonicHub, you must purchase a marine-grade AM/FM antenna.

When connected to a WM-2 Satellite module you can subscribe and include Sirius™ audio on your NSS system. Sirius™ audio and weather service covers inland US waters and coastal areas into the Atlantic and Pacific oceans, Gulf of Mexico and the Caribbean Sea. The Sirius™ audio products received vary depending on your selected subscription package. For more information refer to www.sirius.com.

Before you can start using your equipment, it must be installed according to the Installation manual included with the unit.


Enabling audio

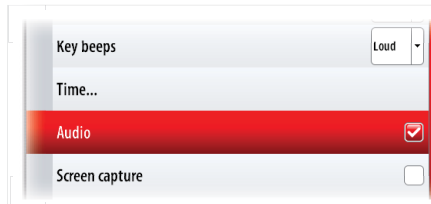

You must enable audio to control audio on your NSS unit.

The audio media bar

When audio is enabled, the media bar will appear at the bottom of the screen on all pages. The media bar varies from one audio source to another.

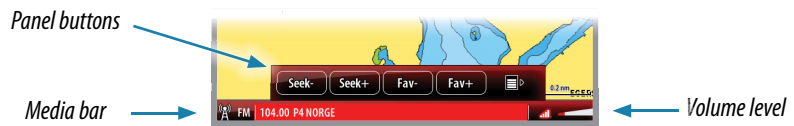

You switch focus between other panels and the media bar by tapping on the selected panel.

The audio menus

When you tap the media bar, the audio panel buttons are displayed. Tapping the screen again makes these go away.

When the media bar is active you can display the full audio menu by:

	<ul style="list-style-type: none">Pressing the MENU key	
	<ul style="list-style-type: none">Tapping the MENU panel button	
	<ul style="list-style-type: none">Pressing and holding on the media bar	

The menus differ from one audio source to another as shown in the following sections.

Setting up the SonicHub speakers

Speaker zones

Your unit has four on-board amplified channels for directly driving speakers. There are also two low level channels (stereo) for supplying signal to an external amplifier, plus two mono channels for amplified subwoofer(s).


The audio outputs are organized in 3 zones. You can adjust balance, volume and volume limit settings independently for each zone. Adjustments to the bass and treble settings will alter all zones. Refer graphics.

Zone 1	Left/Right speakers
Zone 2	Left/Right speakers
Zone 3	Amplifier output, Subwoofer output

Master volume control

By default the volume for all speaker zones are adjusted when you adjust the volume on an NSS unit.

You can adjust each speaker zone individually from any NSS unit from the SonicHub Zones dialog. From this dialog you can also define which zones that shall be altered when you increase/decrease the volume from the control unit.

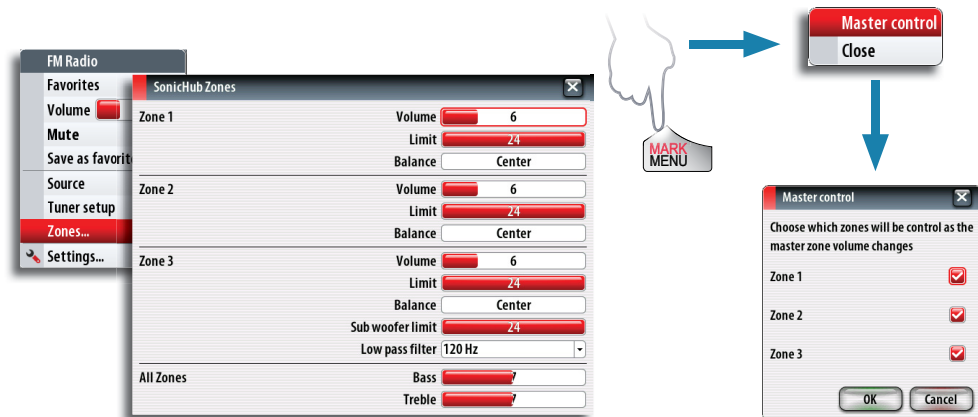

Operating the audio source

Selecting the audio source

You switch between available audio sources from the audio menu.

- **Note:** The Mic source selects a high voltage level input allowing you to broadcast loud hailer messages over the audio system.

Adjusting the volume

The volume is adjusted by using the rotary knob, pressing the **IN / OUT** key or by tapping the volume level icon and then dragging your finger on the slide bar.



The volume can also be adjusted by using the menu, and from the master control dialog as described later in this chapter.






Muting

You toggle muting on/off by pressing the rotary knob.



Audio playback

Playback panel buttons

	• Tap	Display source's native menu
	• Tap	Play previous track
	• Tap	Play
	• Tap	Play next track
	• Tap	Display audio menu

Shuffle and repeat

Shuffle and repeat is turned on/off from the audio menu, or by tapping the icons in the media bar. The icons will be red when the function is turned on.



The playback menu

The playback menus includes an option giving access to the source's native menu or file structure, used for selecting tracks.


The examples show iPod menus.








Using the FM/AM radio

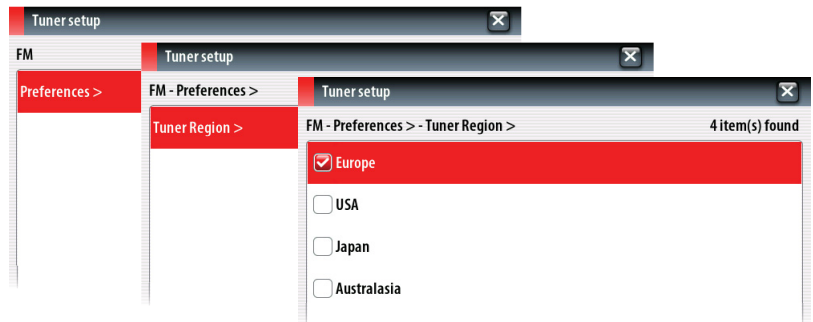Selecting AM/FM tuner region

Before playing FM or AM radio, you must select the appropriate AM and FM tuner regions for your location.




The AM/FM panel buttons

	• Tap and hold	Tune in to an AM/FM radio channel
	• Tap	Goto previous/next station in favorite list
	• Tap	Display audio menu
	• Tap	
	• Tap	Display audio menu

Saving a channel to the favorite list






When the channel is tuned in, you can add the stations to your favorite list.

All favorite channels can be viewed, selected and deleted from within this list.



Using Sirius radio

The Sirius panel buttons

	<ul style="list-style-type: none"> Tap and hold 	Tune in to a Sirius radio channel
		
	<ul style="list-style-type: none"> Tap 	Goto previous/next station in favorite list
		
	<ul style="list-style-type: none"> Tap 	Display audio menu


The channels list

The channels list displays all available Sirius channels, whether or not you have a subscription for the channel.

The favorite list

You can create a list of your favorite Sirius channels from within the channels list. You will not be able to add unsubscribed channels.

When a favorite list is available, you page through this list using the panel buttons.

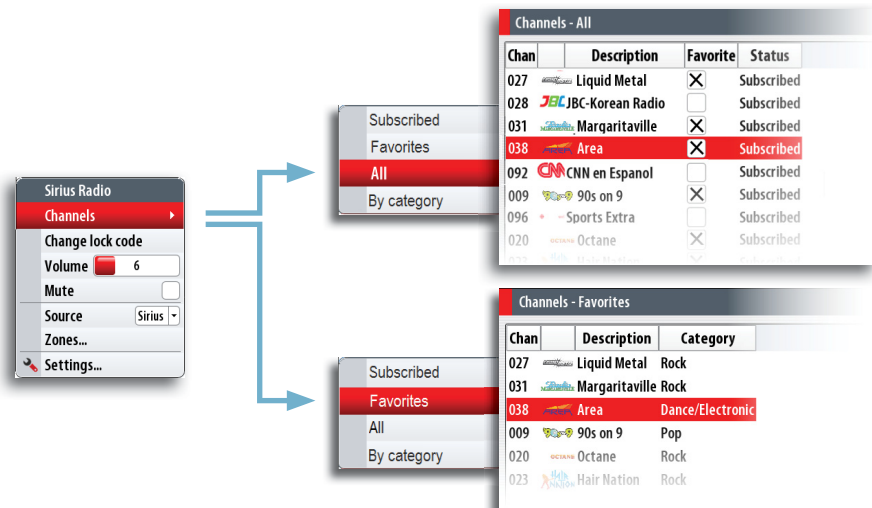

Locking channels

You can lock selected Sirius channels from being broadcast unless an unlock code is entered. When the function is activated, a 4 digit code must be entered before the locking is activated. The same code must be entered before a locked channel can be released.

13

SiriusXM™ weather (North America only)


When connected to a Navico Weather Module WM-2, you can subscribe and include Sirius™ audio and Sirius™ Marine Weather Service on your NSS system (North America only).

Sirius™ audio and weather service covers inland US waters and coastal areas into the Atlantic and Pacific oceans, Gulf of Mexico and the Caribbean Sea.

The audio and weather products received vary depending on your selected subscription package. For more information refer to www.siriusxm.com/marineweather.


The Sirius™ status panel

When the WM-2 is connected to the system, you will get access to the Sirius™ status panel.

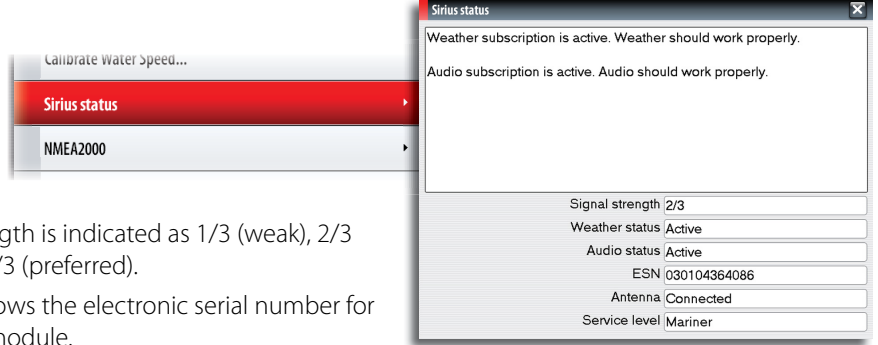

Signal strength is indicated as 1/3 (weak), 2/3 (good) or 3/3 (preferred).


The ESN shows the electronic serial number for the WM-2 module.



The weather display

The Sirius™ weather can be displayed as an overlay on your chart panel.

When weather overlay is selected, the chart menu will increase to show the available weather options.

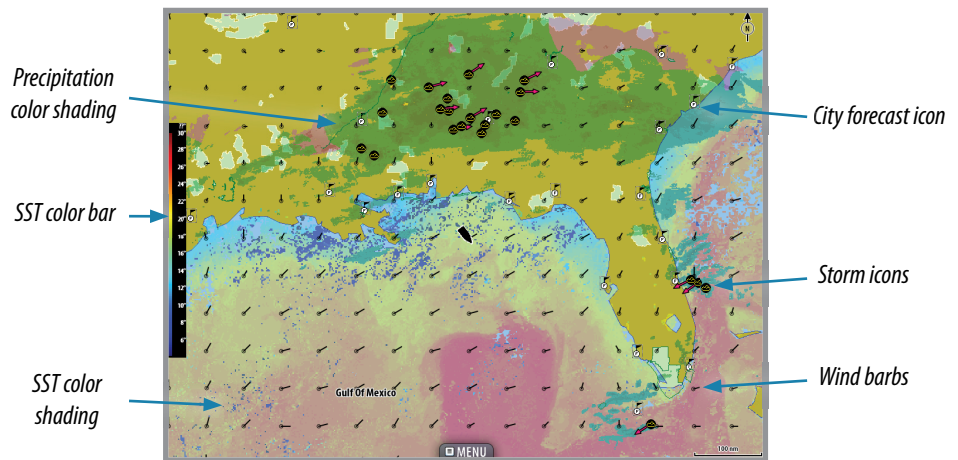


N 9°33.776'
W 95°26.752'
1612 nm, 180 °T
Wave height 9ft.


Showing detailed weather information

When you tap a shaded weather area, available information will be shown in the cursor window.

When you tap a weather icon, detailed information about the observation can be displayed by using the menu or by pressing the rotary knob.

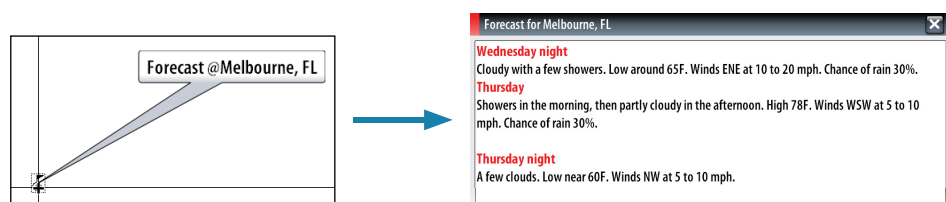

Weather symbology



Precipitation

Shades of color are used to show precipitation type and intensity. Darkest color indicates highest intensity.

Precipitation type	Color codes
Rain	From light green (light rain) - yellow - orange - to dark red (heavy rain)
Snow	Blue
Mixed	Pink

Sea surface temperature (SST)


Can be shown as color shading or text.

When color coding is selected, the SST color bar will be shown on the left side of the display. You can define which temperature range that shall be color coded as described later in this section.

Wave indication

Colors are used to indicate forecasted wave height. Dark red indicate the highest waves, while blue are used for the lowest.

You can define which height range that shall be color coded as described later in this section.



Wind symbols

Length and rotation of the barbs indicate wind direction and speed.

Adjusting the color shading

You can define the sea surface temperature range and wave height color coding.

The temperature above warm and below cool values will be displayed as progressively darker red and darker blue.

Waves higher than the maximum value will be indicated with progressively darker red. Waves lower than the minimum value will not be color coded.





Weather icons

Several weather icons are available to show current or predicted weather conditions. You can tap an icon to display detailed weather information.


Icon	Description
	City forecast
	Surface observation
	Tropical storm tracking; past (grey) - present (red) - future (yellow)
	Hurricane (category 1-5) tracking; past (grey) - present (red) - future (yellow)
	Tropical disturbance/depression tracking; past (grey) - present (red) - future (yellow)
	Storm attributes
	Lightning
	Watch box location and warning
	Marine zone location

Weather overlay transparency


The opaqueness of the weather overlay can be adjusted.

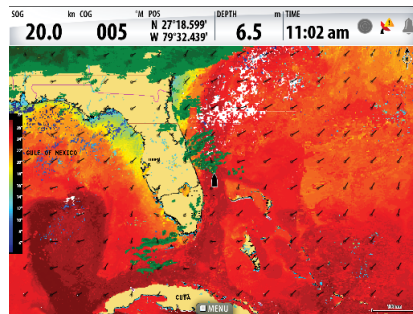

Min transparency

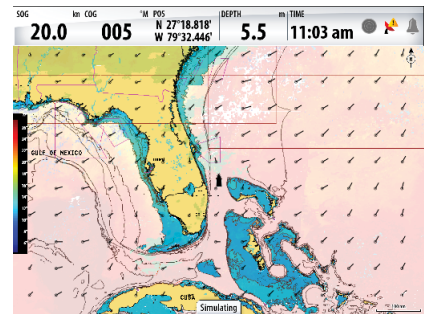

Max transparency

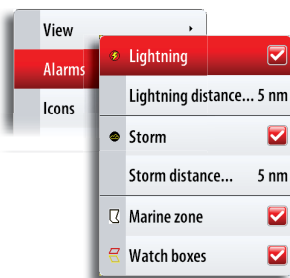

Weather alarms

You can setup the lightning or storm alarms to be within a certain range of your vessel.

You can also get an alarm if a severe weather forecast alarm is issued for your chosen marine zone.

A watchbox is defined by the National Weather Service. When the alarm is turned on you will get an alarm if your vessel is inside or moves into a watchbox.


Weather reports

Marine zone

Sirius™ service includes access to weather reports for all U.S. Marine Zones, with the exception of the high seas zones.

You can setup the system to read the forecast for a selected area.

Tap the selected zone, and use the menu to confirm your selection.

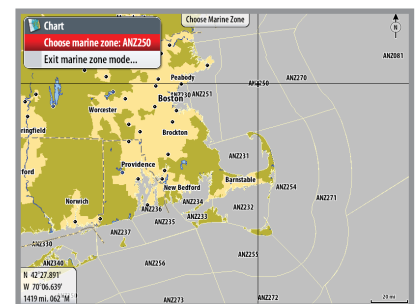

Tropical statements



You can read tropical statements including information about tropical weather conditions. These statements are available for the entire Atlantic and the Eastern Pacific.

Animating Sirius™ weather graphics

The NSS records the weather information you have turned on, and this information can be used to animate past or future weather conditions. The amount of information available in the system depends on the amount of weather activity,- the more complex it is the less time will be available for animation.

You can animate the past or the future depending on which weather view you have turned on:

- if the precipitation overlay was turned on, you can animate for the past and only assume weather conditions in the immediate future.
- if the colored wave height overlay was turned on, you can animate the future (the predictions)



When activated the time for the current graphic animation will be displayed in the lower left corner of the chart panel.

14

Using Video

The video function allows you to view videos or camera sources on your NSS screen.


For information about how to connect the camera, see the separate NSS Installation manuals

- **Note:** The video images will not be shared via the network. You can only view the video on the unit connected to the video source.

The video panel

The video image will be proportionally scaled to fit into the video panel. Area not covered by the image will be colored black.


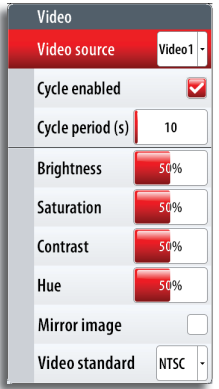


The graphics below show images from a thermal imaging camera.

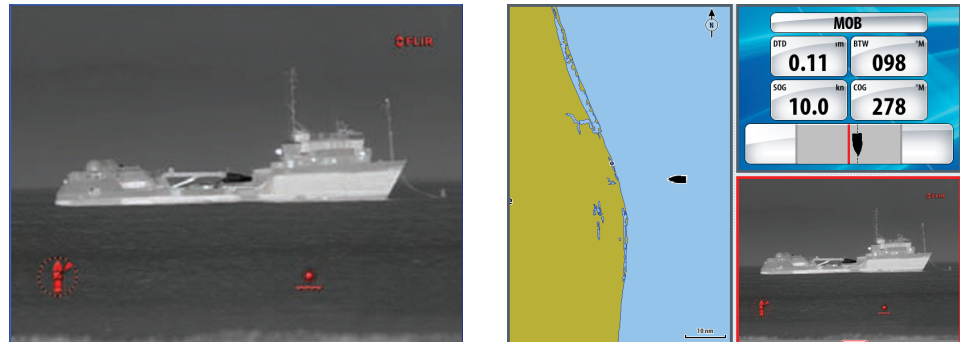

The video menus

When you tap the video panel, the video panel buttons are displayed. Tapping the screen again makes these go away.

When the video panel buttons are active you can display the full video menu by:

	<ul style="list-style-type: none">Pressing the MENU key	
	<ul style="list-style-type: none">Tapping the MENU panel button	
	<ul style="list-style-type: none">Pressing and holding on the video panel	

Setting up the video panel

The video source

NSS supports two video input channels. You can select to view one channel only, or to cycle the image between available video cameras.

The cycle period can be set from 5 to 120 seconds.

Adjusting the video image

You can optimize the video display by adjusting the video image settings. The settings are adjusted individually for each video source.

Default for all settings: 50%.

Mirroring the video image

Video input can be set to display a mirrored image. This setting can be helpful for rear-facing cameras used to back-down the vessel.

The video standard

NSS supports NTSC and PAL video. The two channels are set up individually. Check the local video standard or the standard of your cameras.

15


BEP CZone

The NSS system integrate with BEP's CZone system used for controlling and monitoring a distributed power system on your vessel.

A separate manual will be provided with your CZone system. Refer to this documentation and to the NSS Installation for how to install and configure the CZone system.

The BEP CZone panel

When the CZone system is connected and configured, the CZone icon will be available on the **Tools** panel. This icon gives access to the CZone panel, providing icons for CZone modes and system overview.

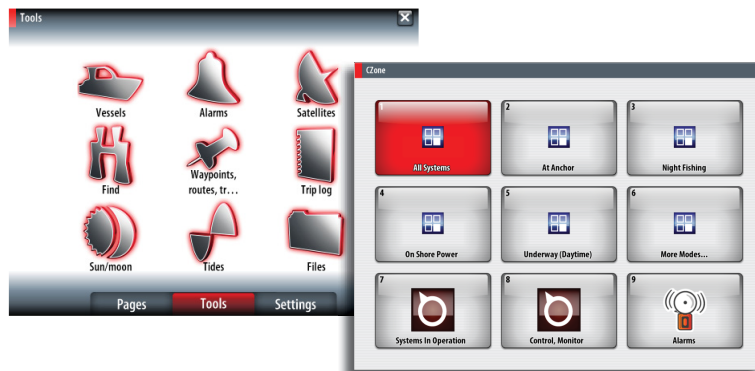


CZone modes


The CZone modes provide a one press functionality that allows multiple circuits to be controlled efficiently. The modes are configured during installation of the system.

All available modes will be displayed on the CZone panel.

If there are more than 6 modes configured on screen the rest of the modes will move to the More Modes option.

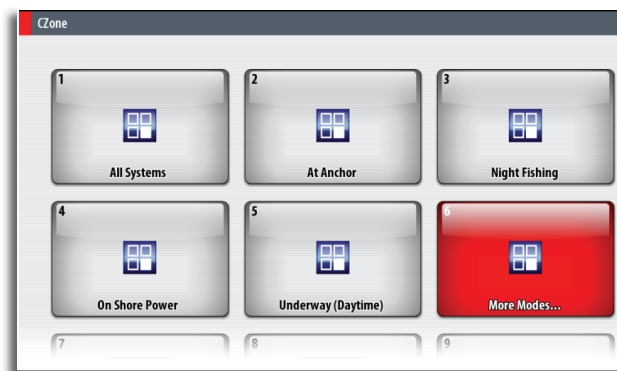

CZone system overview options

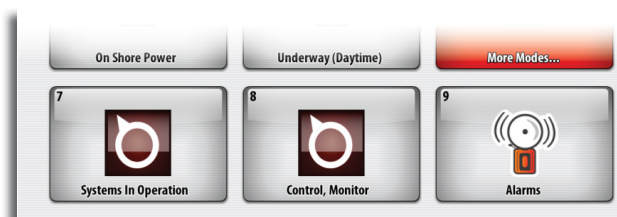




Enables you to monitor all on board parameters including tank levels displayed in graphical, percentage and volume remaining formats.

Shows control options and monitoring information.


Displays visual and audible alarms that can be set for high and low levels.

The CZone info panel


When the CZone is installed and configured, an additional CZone dashboard will be added to the Instrument panels.



Vessel dashboard



Navigation dashboard



Angler dashboard



CZone dashboard

You switch between a panel's dashboards by tapping the left and right arrow symbols or by selecting the dashboard from the menu.

See "The Instruments panels" on page 62 for further information.

Editing the CZone dashboard

You can customize CZone dashboard by changing the data for each of the gauges. Available editing options will depend on the type of gauge and which data sources are connected to your system.

16

The alarm system

The NSS system will continuously check for dangerous situations and system faults while the system is running. When an alarm situation occurs, an alarm message will pop up on the screen.

If you have enabled the siren, the alarm message will be followed by an audible alarm, and the switch for external alarm will go active.

The alarm is recorded in the alarm listing so that you can see the details and take the appropriate corrective action.


Type of messages

The messages are classified according to how the reported situation will affect your vessel. The following color codes are used:

Color	Importance
Red	Critical
Orange	Important
Yellow	Standard
Blue	Warning
Green	Light warning

Single alarms

A single alarm is displayed with the name of the alarm as the title, and with details for the alarm.



Multiple alarms

If more than one alarm is activated simultaneously, the alarm message will display a list of up to 3 alarms. The alarms are listed in the order they occur with the alarm activated first at the top. The remaining alarms are available in the Alarms dialog.



Acknowledging a message


The following options are available in the alarm dialog for acknowledging a message:

Option	Result
OK	Sets the alarm state to acknowledged, meaning that you are aware of the alarm condition. The siren / buzzer will stop and the alarm dialog will be removed. The alarm will however remain active in the alarm listing until the reason for the alarm has been removed.
Disable	Disables the current alarm setting. The alarm will not show again unless you turn it back on in the Alarms dialog.

There is no time-out on the alarm message or siren. These remain until you acknowledge it or until the reason for the alarm is removed.

The alarms dialog

The alarms can be setup in the Alarms dialog. This dialog also includes information about active alarms and alarm history.

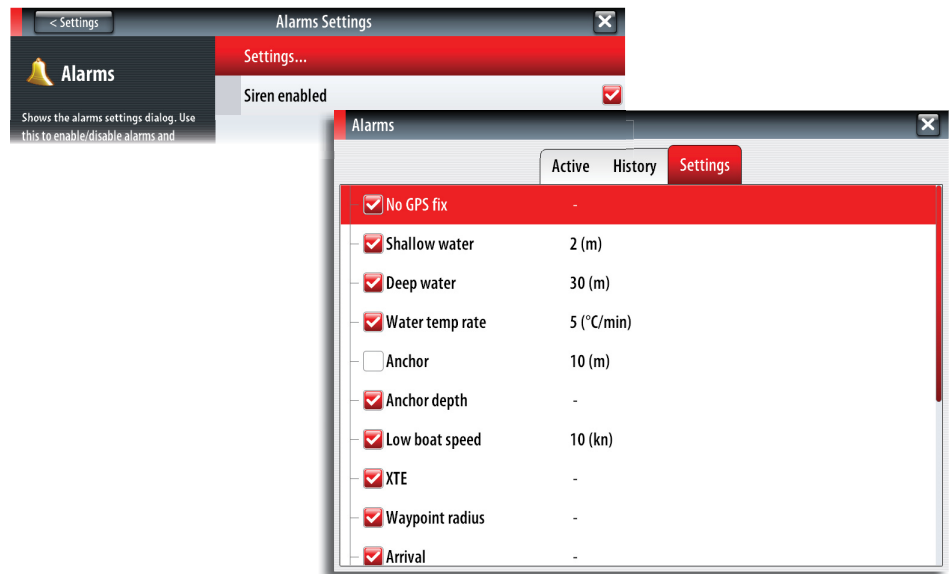


The alarms are described in the chapter describing the corresponding feature. E.g. all autopilot alarms are described in the **Autopilot** section.

17

The Tools page

The Tools dialog includes options and tools that are not specific to any panel. This dialog and sub-screen dialogs are always full screen.

A tools dialog will open on top of your previous page. When you close one of these dialogs the display will return to last active page.

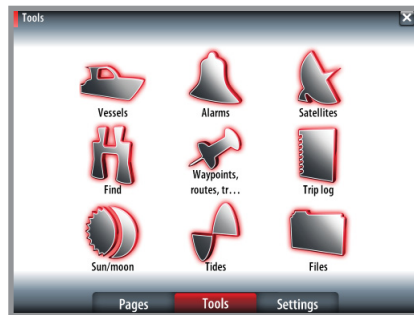

Any listing in the tools dialogs has a page menu, giving access to available options for the selected item. The menu is displayed by tapping and holding on the screen or by pressing the **MENU** key.

Vessels




Status listing

List of all AIS, MARPA, and DSC vessels with available information.

Message listing

List of all messages received from other AIS vessels with time stamp.

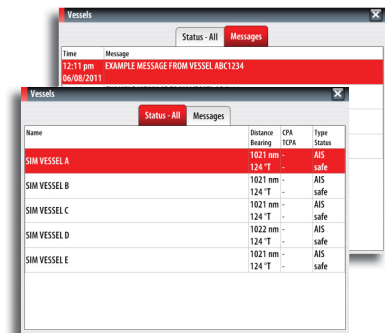

Alarms



Active alarms


List of active alarms.

Alarm history

List of all alarms with time stamp.

Alarm settings

List of all available alarm options in the system, with current settings.

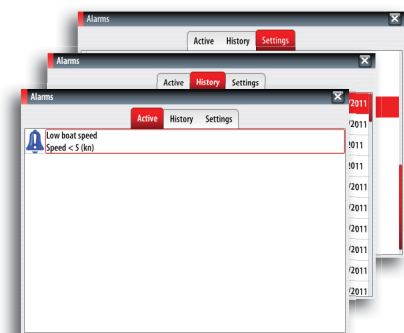


Satellites



Status page for active satellites.

WAAS (and EGNOS) differential position correction can be configured to On or OFF.






Find

Search function for several chart items.



Waypoints/routes/tracks

List of waypoints, routes and tracks with details. Tap on the waypoint, route or track you wish to edit or delete

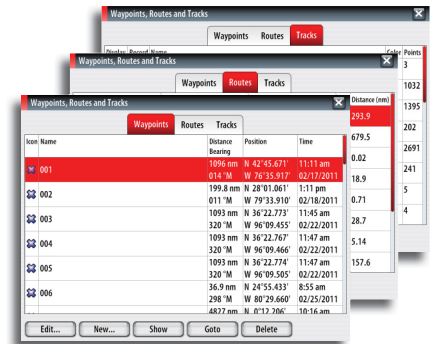


Trip Log

Trip 1 / Trip 2

Displays voyage and engine information, with reset option for all data fields.


Today

Displays voyage and engine information for current date. All data fields will be automatically reset when the date changes.

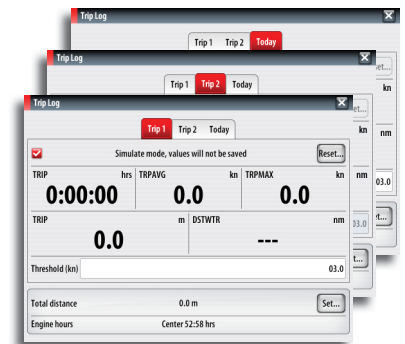

Sun/moon

Displays sunrise, sunset, moonrise and moonset for a position based on entered date and the position's latitude/longitude.

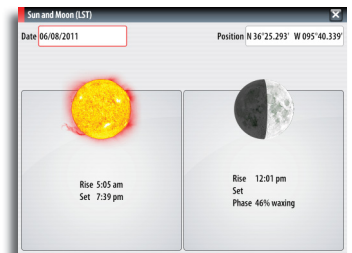


Tides

Displays tide information for the tide station nearest to your vessel.

Tap the arrow panel buttons to change date, or tap the date field to access the calendar function.


Available tide stations can be selected from the menu.

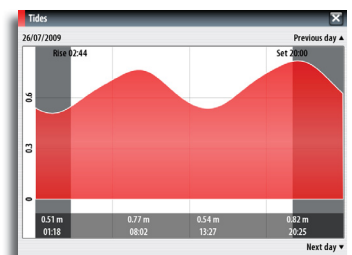



Files


File management system for files, waypoints, routes, tracks and settings.

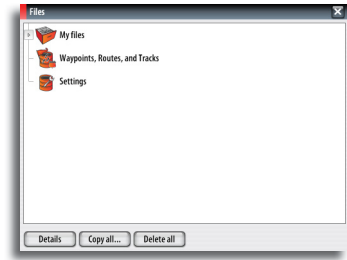

CZone

CZone will appear when the system is connected to a CZone system.

This allows for access to control, monitoring and alarms associated with Czone circuits. It also allows selection of custom operational modes if these have been configured.

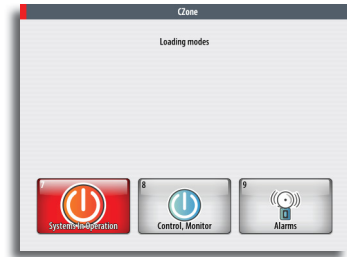

18

Customizing your system

Page overview

The Pages group overview

The **Pages** group overview is pre-configured with 6 page groups and with 3 shortcut icons to Autopilot panel, to a combined Chart/Echosounder panel, and to the StructureScan™ panel.

The pre-configured shortcuts can be removed or modified by the user.




The page group panels

Each of the 6 page group panels are pre-configured with a combination of pages:

The main page in each group is a full size panel. All pre-configured pages, except the main page for the page group, can be modified by the user.


Each page group can have up to 9 pages, organized as single panels or as a combination of panels. You can also define your own pages.

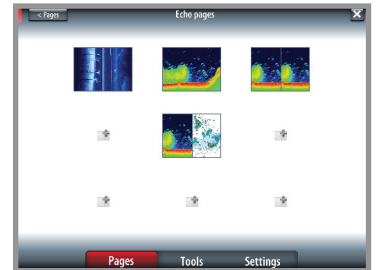

Create favorite pages

You can edit a pre-configured page or define your own pages from the page editor.




1. Tap and hold on an empty page icon or a pre-configured page icon. You can also select the icon with the rotary knob and then pressing the **MENU** key
 - The Page editor panel will be displayed
2. Drag and drop panel icons to set up your custom screen
3. Save the page layout by tapping the **Save** button.

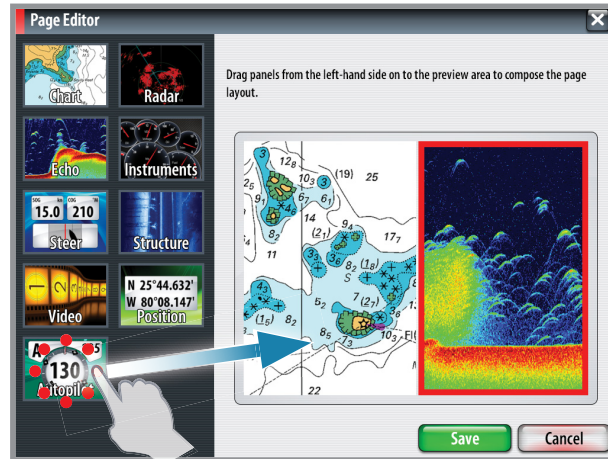


You can have several panels on each page depending on screen size:

- NSS7 2 panels
- NSS8 and NSS12: 4 panels

The panels are arranged as illustrated below.





Deleting a page


All pre-configured and user defined pages, except the main page for the page group, can be deleted.

1. Tap and hold on the page icon for the page you want to remove. You can also select the icon with the rotary knob and then pressing the **MENU** key
2. Select the delete option from the menu

Setting the appearance of the instrument bar

Data sources connected to the system can be viewed in the instrument bar on top of your pages.

You can choose to turn the instrument bar off, display either one or two rows, or set it to alternate the rows automatically.




Turning the databar on/off

1. Tap and hold on the page icon for the page you want to edit.
2. Toggle on/off the instrument bar from the menu


Changing the appearance of the databar

1. Tap and hold the instrument bar on top of the dialog to get access to the edit mode

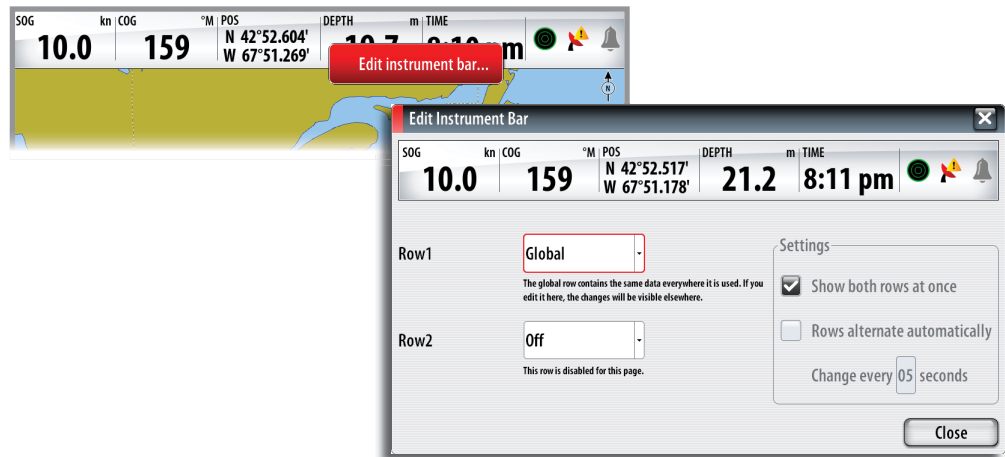

2. Tap the instrument field to change, and select the type of information you want to display
3. Define the appearance for both rows, and the time period if you want the rows to alter automatically
4. Save your changes by tapping the **Close** button

Changing system settings

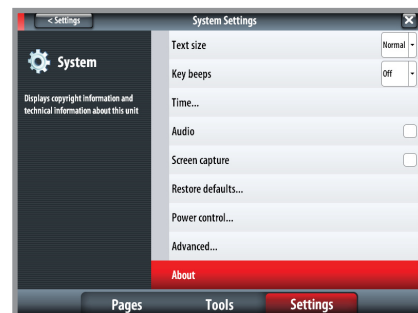

The system settings provides access to advanced settings for your system and determines the way your system displays various user interface information on the display.

Language

Controls the language used on this unit for panels, menus and dialogs. Changing the language will make the unit re-start.

Text size

Used for setting the text size on menus and dialogs.

Default setting: Normal

Key beeps

Controls the loudness of the beep sound when a key is pressed.

Default settings: On

Time

Controls the local time zone offset, and the format of the time and date.

Audio

Used for activating the audio media bar at the bottom of the pages.

Screen capture

Allows you to use the power key for capturing the screen image.

The image files can be moved or copied to a micro-SD card.

Restore defaults

Allows you to select which settings are to be restored to their original factory settings.

Power control

Controls whether this unit is a master or slave on the network.

Advanced

Shows a dialog with more advanced settings.

About

Displays copyright information and technical information for this unit.


19

Using the simulator


Simulator mode

The simulation feature will let you see how the unit works in a stationary position and without being connected to echosounder, radar, GPS etc.

You can use the simulator to help you become familiar with your unit before using it out on the water.

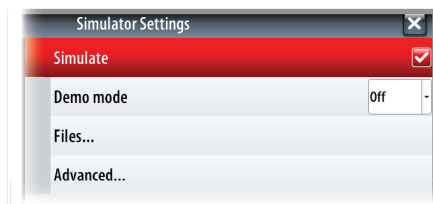

When the simulator is toggled on this is indicated in the lower part of the display.



Demo mode

In this mode the unit automatically runs through the main features of the product; it changes pages automatically, adjusts settings, opens menus etc.


If you press a key when demo mode is running, the demonstration will pause. After a time-out period, demo mode will resume.

Selecting simulator source files

You can select which data files to be used by the simulator.

A set of source files is included in your system, and you can import files by using an SD card inserted into the units card reader.

You can also use your own recorded echosounder files in the simulator.

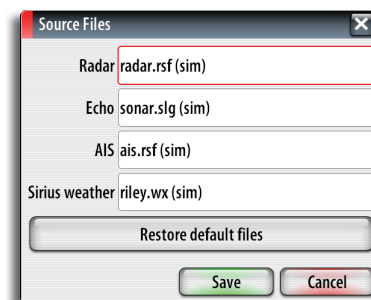

See "Recording the echosounder data" on page 54 for information about how to record sounder files.

Advanced simulator settings

The advanced simulator settings allow you to define how to run the simulator. When the settings are saved these will be used as default when starting the simulator mode.

GPS source


Selects where the GPS data is generated from.

Speed, Course and Route

Used for manually enter values when GPS source is set to Simulated course or Simulated route. Otherwise, GPS data including speed and course comes from the selected echosounder or radar files.

Set start position

Moves the vessel to current cursor position.

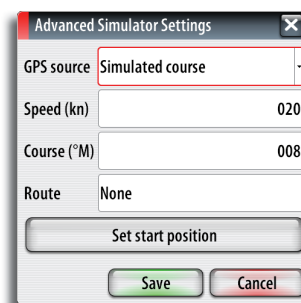

20

Maintenance

Preventive maintenance

The NSS unit does not contain any field serviceable components, therefore the operator is required to perform only a very limited amount of preventative maintenance.

It is recommended that you always fit the supplied protective sun cover when the unit is not in use.

Simple maintenance procedures

Cleaning the display unit

The supplied cleaning cloth should be used to clean the screen, where possible. Use plenty of water to resolve and take away salt remains. Crystallized salt may scratch the coating if using a damp cloth. Apply minimal pressure to the screen.

Where marks on the screen can't be removed by the cloth alone, use a 50/50 mixture of warm water and isopropyl alcohol to clean the screen. Avoid any contact with solvents (acetone, mineral turpentine etc.), or ammonia based cleaning products, as they may damage the anti-glare layer, plastics bezel, or rubber keys.

To prevent UV damage to the plastic bezel and rubber keys, it is recommended that the sun cover be fitted when the unit is not in use for an extended period.

Cleaning the media port door

Clean the media port door regularly to avoid that salt crystallize on the surface, causing water to leak into the card slot.

Checking the keys

Make sure that no keys are stuck in the down position. If one is stuck, wiggle the key to free it back to normal.

Checking the connectors

The connectors should be checked by visual inspection only.

Push the connector plugs into the connector, if the connector plugs are equipped with a lock; ensure that this is in the correct position.

Software upgrades

The latest software for the NSS will be available for download from our web site; www.simrad-yachting.com.

Detailed instructions for how to install the software will follow the upgrade files.

For more details about software upgrades, refer to the separate Installation manual.

Trouble shooting


Failure	Corrective action
One or more functions do not operate as normal	Perform a back to factory as described in "Restore defaults" on page 84
Normal operation is not possible and back to factory does not fix the problem	Switch off the unit, press and hold the zoom in and out keys and switch on the unit. Release the zoom keys after some 5-6 seconds. A second beep confirms the reset

Backing up your system data

Waypoints, routes, tracks that you create are filed on your system. It is recommended to regularly copy these files and your system settings files as part of your back-up routine.

The files are copied to a Micro-SD card inserted in the card slot on the front of your unit.


Different output formats are available:

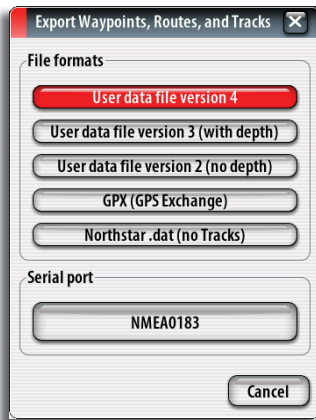

User Data File version 4	This is best used when transferring data from one NS* system to another, since it contains all the extra tid bits of information these systems store about items.
User Data file version 3 (with depth)	Should be used when transferring user data from an NS* system to a legacy Lowrance (LMS, LCX, etc)
User data file version 2 (no depth)	
GPX (GPS Exchange)	This is the format most used on the web that shares among most GPS systems in the world. Use this format if you are taking data to a competitors unit.
Northstar.dat (no Tracks)	Used to transfer data to a legacy Northstar device.

The example shows how to export waypoints, routes and tracks. Selection is done by using the rotary knob or the menu.

1. Select files
2. Press the rotary knob to access the export dialog, and select the file format you want to export to
3. Select destination folder
4. Enter name for exported file

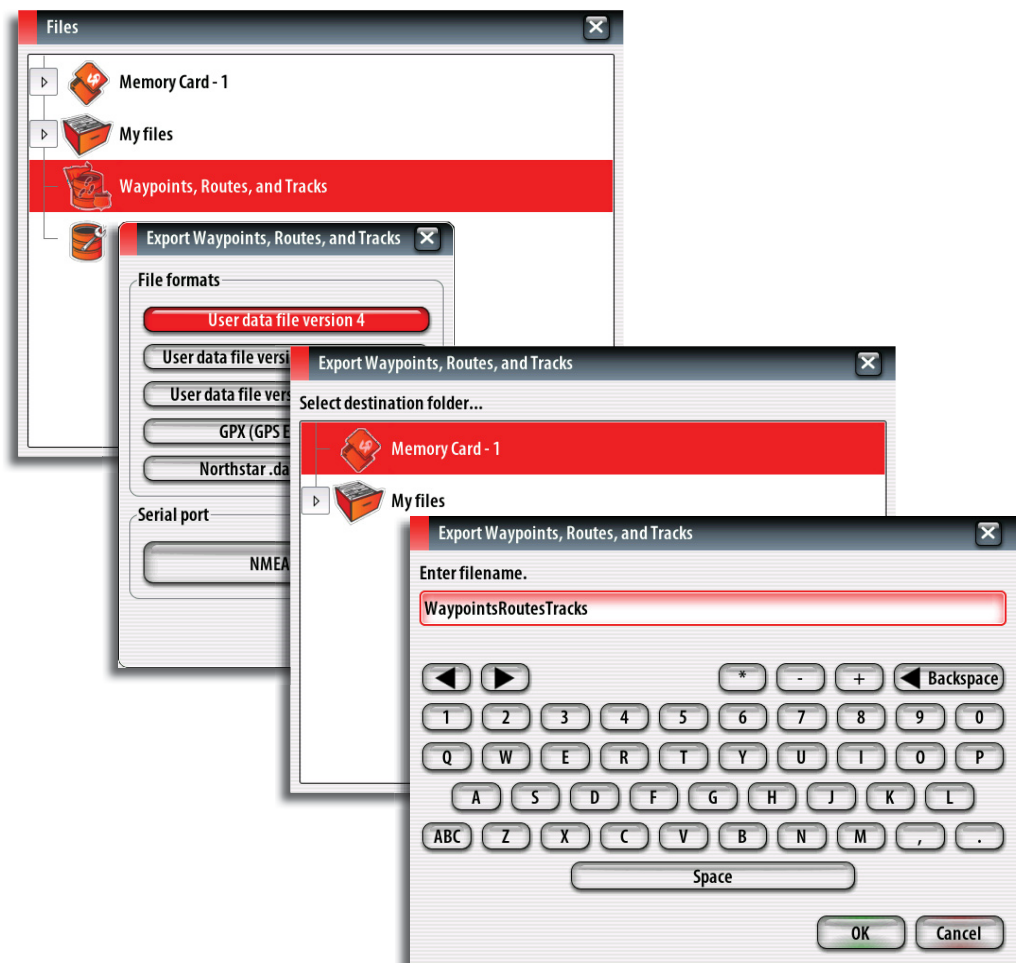

21

Menu and dialog overview

Panel menus


The graphics below shows panel specific menus without and with active cursor on the panel. A panel menu is displayed by pressing the **MENU** key, by tapping the **MENU** panel button or by tapping and holding on the panel.

Chart




→ **Note:** Chart menu will be extended if overlay is selected.


Instruments




Echo

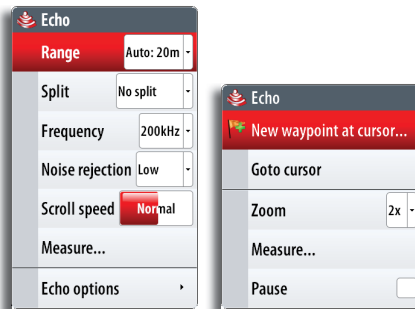

Video

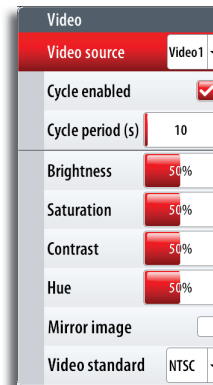


Structure

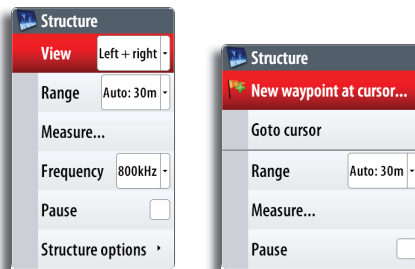

Autopilot




Radar

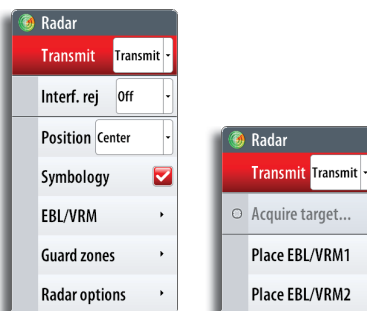

Goto menu

This menu is displayed on any panel by pressing and holding the **GO TO / PAGES** key.



Settings dialogs

The **Settings** overview page is available by repeated presses on the **PAGES** key.



System settings



Echosounder settings



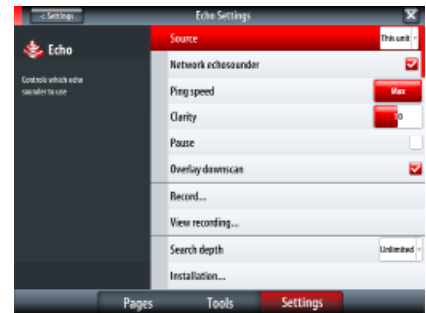


Chart settings


Insight chart database

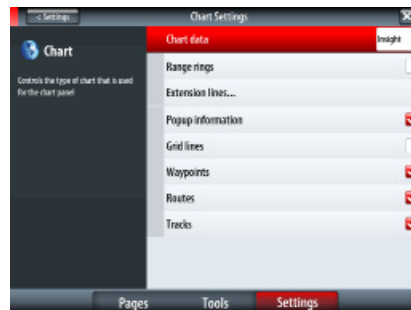


Radar settings

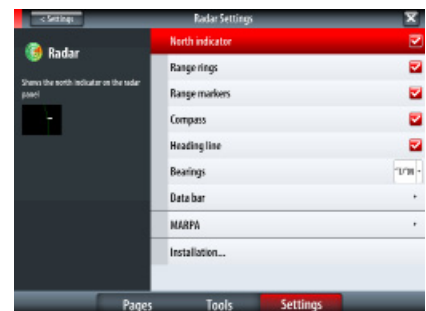

Navionics chart database

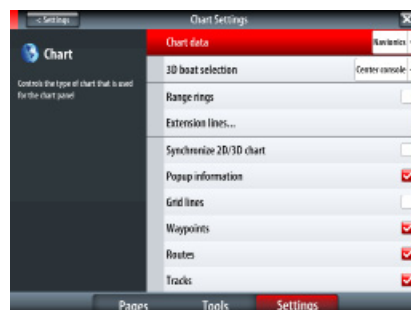


Autopilot settings

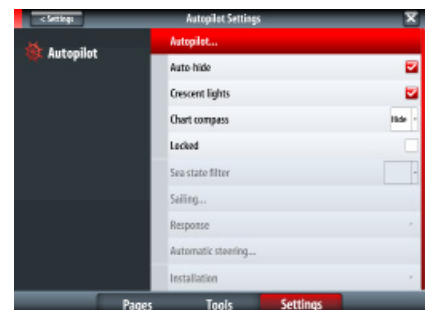


Navigation settings




Units settings

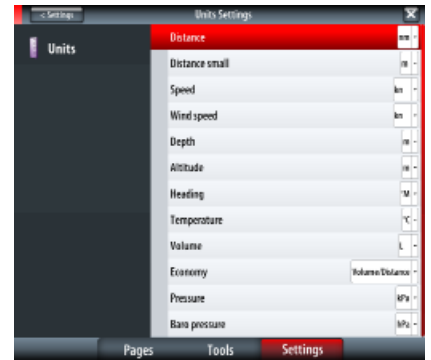


Fuel settings

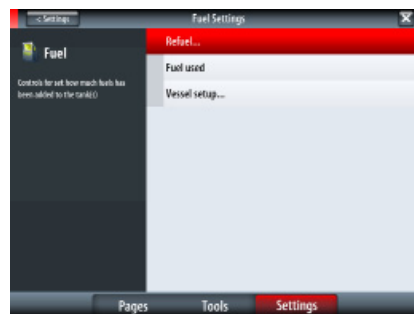


Network settings

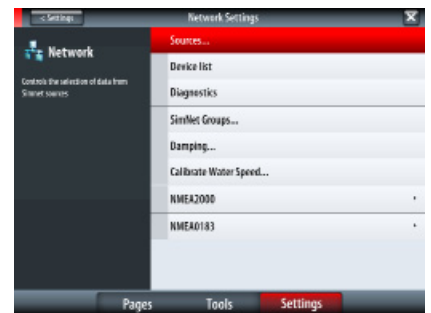


Tracks settings

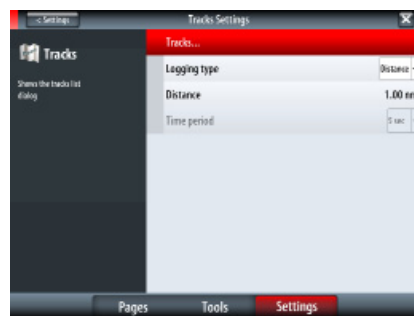


Vessels settings

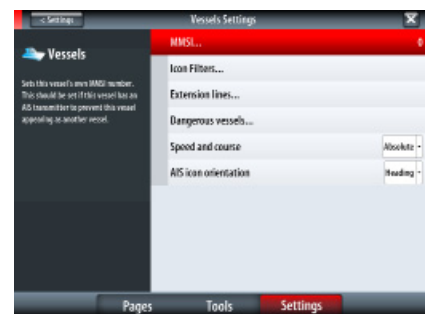

Alarms settings

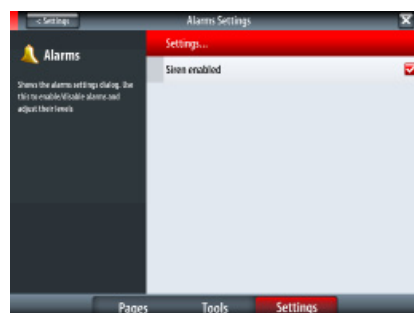

Simulator settings

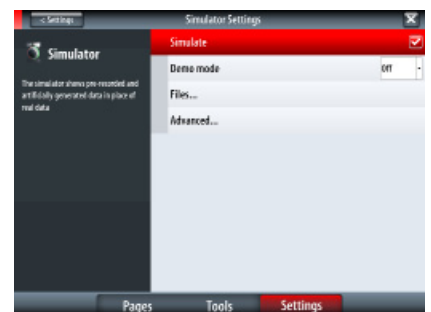

A

About this manual 3
 AIS 64
 Defining dangerous vessels 66
 Filtering the targets 66
 Icon orientation 66
 Selecting targets 64
 Target symbols 64
 Vessel alarms 65
 Vessel settings 65
 Alarms 78
 Acknowledging a message 78
 Dialog 79
 History 79
 Limits 27
 Listing 80
 Message 11
 Messages 78
 Multiple alarms 78
 Single alarms 78
 Vessel 65
 Waypoint 23
 Weather 73
 Audio 67
 FM/AM radio 69
 Media bar 67
 Menus 67
 Operating the audio source 68
 Rotary knob 68
 Sirius radio 70
 SonicHub speakers 68
 Autopilot 30
 Activating 30
 AUTO mode 33
 Crescent lights 41
 Depth Contour Tracking, DCT 36
 Dodging 37
 EVC system 40
 Follow-up steering (FU) 33
 Gybing 39
 Heading capture 33
 Leg 35, 37, 38
 Locking an NSS unit 41
 Locking remote stations 40
 Mode 30
 Mode indication 30
 Mode overview 31
 Navigating with autopilot 27
 Navigating with the 37
 NoDrift mode 37
 Panel 31
 Pop up 30
 Power steering (NFU) 33
 Response 42
 Rotary knob 34, 35, 37
 Sailing parameters 42
 Sailing with the autopilot 38
 Sea state filter 41

Settings 41
 Standby 33
 Tacking 39
 Turn pattern steering 33
 Turn variables 34
 Using the NSS in an AP24/AP28 system 40
 Waypoint arrival circle 38
 Wind steering 40
 Wind vane steering 38

B

Backing up your system data 88
 Basic Operation 13
 BEP CZone 76
 Dashboard 77
 Modes 76
 Panel 76
 System 82
 System overview options 76

C

Cancel navigation 27
 Charts 16
 3D charts 18
 View options 19
 Zooming 18
 Categories 20
 Creating routes 17
 Cursor 17
 Detail 19
 Dragging waypoints 17
 Grid lines 22
 Imagery style 20
 Look ahead 19
 Measuring distance 17
 Micro-SD Card Slot 21
 Objects 17
 Options 19
 Orientation 18
 Overlay 18
 Panel 16
 Panning 16
 Placing waypoints 17
 Pop-up information 22
 Range Rings 22
 Rotary knob 16
 Scale 16
 Select chart item 17
 Settings 21
 Synchronize 2D/3D chart 22
 Vessels' extension lines 22
 Vessel symbol 16
 Compass symbol 30
 Crescent lights 41
 Cursor 15
 Navigate to cursor position 26
 Placing 15

Customizing your system 83

D

Data fields 29
Datum 28
Declarations 3
Demo mode 86
Dialog boxes 14
 Scroll by dragging the list 14
Dialog overview 89
Dialogs 10

E

Echosounder 52
 Clarity 57
 Color settings 54
 Cursor 54
 Frequency 53
 Gain settings 54
 Image items 56
 Measuring distance 55
 Network 57
 Noise rejection 53
 Options 56
 Overlay downscan 58
 Palettes 56
 Panel 52
 Pause 55
 Ping speed 57
 Placing a mark 55
 Recording 55, 58
 Rotary knob 54
 Scroll speed 53
 Search depth 58
 Settings 57
 Split screen options 53
 StructureScan™ overlay 57
 Viewing sounder history 54
 Zooming 53

F

Files 82
Fish'n Chip 21
FM/AM radio 69
Front panel and keys 9

G

Goto menu 26
GPS position 16, 18, 37, 50
GPS position info 29
GPS source 86
Great-circle 27

I

Instrument bar 10, 84
Instrument panels
 Angler dashboard 63
 Customize 63
 Dashboard layouts 63
 Edit 63

Navigation dashboard 63
 Rotary knob 63
 Vessel dashboard 63
Instruments panels 63

K

Key beeps 85
Keys 9
 MOB key 9
 PAGES key 12
 Power key 13
 Rotary knob 9

L

Language 85
Light dialog 13
Listings 80
 Alarms 80
 CZone 82
 Files 82
 Find 81
 Satellites 80
 Sun/moon 81
 Tides 81
 Trip Log 81
 Vessels 80
 Waypoints/routes/tracks 81
Loran 28

M

Magnetic variation 28
Maintenance 87
Man Over Board 15
 Cancel navigation 15
 Delete a MOB mark 15
 MOB key 9
Menu overview 89
Menus 10, 14
 Rotary knob 14
 Select by tapping 14
 Touch screen 10
Micro-SD Card Slot 21

N

Navigating on the chart 26
Navigation settings 27
Navionics chart options 20
 Fish'n Chip 21
 Optional settings 21
 Photo overlay 20
 Photo transparency 21

P

Pages and panels 13
 Active panel 14
 Application panels 10
 Autopilot panel 31
 BEP CZone panel 76
 Control pages 12
 Create favorite pages 83

- Deleting a page 84
- Eshosounder panel 52
- Instruments panels 63
- MENU panel button 11
- Pages group overview 83
- Panel button 10
- Panel menus 89
- Position panels 29
- Radar panel 44
- Select 13
- Steer panel 28
- Tools page 80
- Video panel 74
- Panel menus 89
- Position panels 29
- Power control 85
- Power key 13

R

- Radar 44
 - Alarm settings 47
 - Center 45
 - Cursor 44
 - Data bar 51
 - Defining dangerous vessels 50
 - EBL/VRM 46
 - Fast scan 48
 - Gain 45
 - Guard zone 47
 - Image 45
 - Installation 51
 - Interference 45
 - Look Ahead 45
 - MARPA settings 51
 - MARPA targets 49
 - Measuring range and bearing 46
 - Offset 46
 - Operational modes 44
 - Options 47
 - Orientation 48
 - Overlay 44, 50
 - Palette 48
 - Panel 44
 - Rain Clutter 45
 - Range rings 46
 - Rotary controls 44
 - Rotary knob 45, 47
 - Sea clutter 45
 - Settings 51
 - STC curve 48
 - Symbology 44, 51
 - Target boost 47
 - Target expansion 48
 - Target trails 48
 - Threshold 47
 - True motion 46
 - Vessel alarm settings 50
- Restore defaults 85
- Rhumb line 27
- Rotary knob 9
- Routes 24

- Add a new routepoint 24
- Course line 29
- Creating new 24
- Creating routes 17
- Edit 24
- Leg 24, 27
- Listing 81
- Navigate a route 26
- Off course limit 29
- Panel 25
- Selecting start point 26

S

- Satellite status 80
- Screen capture 85
- Screen details 10
- Search function 81
- Settings dialogs 90
- Simulator 86
 - Advanced settings 86
 - Mode 86
 - Selecting source files 86
- Sirius radio 70
- Sirius weather 71
 - Animating weather graphics 73
 - Display 71
 - Icons 72
 - Information 71
 - Overlay transparency 73
 - Reports 73
 - Rotary knob 71
 - Symbology 72
 - Weather alarms 73
- Software 4
 - Upgrades 87
- SonicHub speakers 68
- Split screen options 53
- Standby mode 13
- Steer panel 28
- StructureScan 59
 - Color settings 61
 - Cursor 61
 - DownScan 59
 - DownScan image 61
 - Frequencies 60
 - History 61
 - Image settings 59
 - Measuring distance 62
 - Options 62
 - Pause 62
 - Placing a mark 61
 - Range setting 60
 - Recording data 62
 - Rotary knob 61
 - SideScan 60
 - SideScan image 61
 - Zooming 60
- Sun/moon 81
- System settings 84

T

- Target symbols 64
- Technical information 85
- Text size 85
- Tides 81
- Time and date 85
- Tools page 80
- Touch screen, basic operation 13
- Tracks 24
 - Creating new 25
 - Listing 81
 - Panel 25
 - Settings 25
- Trip Log 81
- Trouble shooting 87

V

- Vessel status listing 80
- Vessel symbol 16
- Video 74
 - Adjusting image 74
 - Menus 74
 - Panel 74
 - Source 74

W

- Warranty 3
- Waypoints 23
 - Alarm settings 23
 - Dragging waypoints 17
 - Edit 23
 - Listing 81
 - Panel 25
 - Placing waypoints 17
 - Positioning 23



LOWRANCE

SIMRAD

B&G

www.bandg.com
www.simrad-yachting.com
www.lowrance.com