
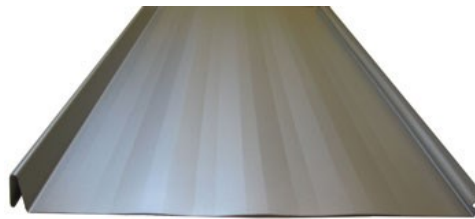
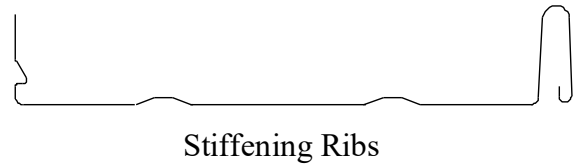
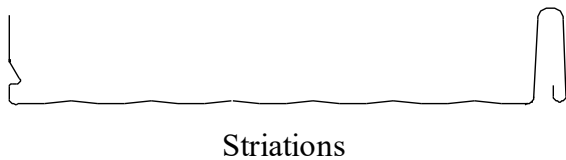


SS100

The SS100 has the same sleek look as the SS150 in a low profile. The roof system snaps together with a concealed clip and fastener. The 1" interlocking seam allows for unlimited thermal movement, resistance to wind uplift, and ease of installation. Panels are designed for application on solid substrate

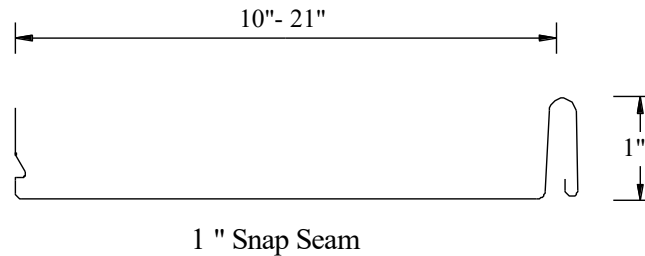

- **Panel Width:** 13", 17", 21"
- **Min. Panel Length:** 2'
- **Max Panel Length:** 45' (Consult SMWA for Field Roll Forming)
- **Min Slope:** 3:12 Solid Substrate
- **Material:** Standard 24 Gauge Steel (Consult SMWA for optional material, gauges and finishes)
- [Color Chart](#)
- **Optional:** striations or stiffening ribs

"Oil canning" is an inherent character of steel and metal products caused by variations in substrate and relative reflectivity of the material and is not cause for rejection. Narrow panel widths, striations, stiffening ribs, and embossing help prevent this problem.