

# SINGLE POINT LESSON- V-BELT MAINTENANCE 101

BY: **RICKY SMITH,  
CMRP, CMRT, CRL**



# V-BELT MAINTENANCE 101

Reference: Belt Drive Preventive Maintenance Manual by Gates Corporation


V-Belt Maintenance is a requirement if you want to ensure optimal belt drive performance. This process requires proper maintenance and discipline to ensure effective belt operation and a long service life. When coupled with a regularly scheduled maintenance program, belt drives will run relatively trouble-free for a long time. Remember this: "Life of the v-belt begins with Installation".

## General Rules: (if you want to stop V-Belt failures)

1. Ensure proper alignment of sheaves both parallel and angular using a sheave laser alignment tool. Do not use a straight edge or string if one expects optimal life from your V-Belts.
2. Use a span sonic tension meter to measure deflection and tension of a V-Belt. To determine deflection and tension required go to your belt manufacturer.



3. Another tool to use is simple tool to measure tension and deflection using a tension gauge.



**Table 1: Recommended Deflection Force Per Inch For Super HC V-Belts, Super HC Professional V-Belts, Super HC Multi-Groove V-Belts or Super HC Multi-Groove V-Belts**


Span inches	Deflection inches	Span inches	Deflection inches	Span inches	Deflection inches
10	0.10	12	0.12	14	0.14
12	0.12	14	0.14	16	0.16
14	0.14	16	0.16	18	0.18
16	0.16	18	0.18	20	0.20
18	0.18	20	0.20	22	0.22
20	0.20	22	0.22	24	0.24
22	0.22	24	0.24	26	0.26
24	0.24	26	0.26	28	0.28
26	0.26	28	0.28	30	0.30
28	0.28	30	0.30	32	0.32
30	0.30	32	0.32	34	0.34
32	0.32	34	0.34	36	0.36
34	0.34	36	0.36	38	0.38
36	0.36	38	0.38	40	0.40
38	0.38	40	0.40	42	0.42
40	0.40	42	0.42	44	0.44
42	0.42	44	0.44	46	0.46
44	0.44	46	0.46	48	0.48
46	0.46	48	0.48	50	0.50
48	0.48	50	0.50	52	0.52
50	0.50	52	0.52	54	0.54
52	0.52	54	0.54	56	0.56
54	0.54	56	0.56	58	0.58
56	0.56	58	0.58	60	0.60
58	0.58	60	0.60	62	0.62
60	0.60	62	0.62	64	0.64
62	0.62	64	0.64	66	0.66
64	0.64	66	0.66	68	0.68
66	0.66	68	0.68	70	0.70
68	0.68	70	0.70	72	0.72
70	0.70	72	0.72	74	0.74
72	0.72	74	0.74	76	0.76
74	0.74	76	0.76	78	0.78
76	0.76	78	0.78	80	0.80
78	0.78	80	0.80	82	0.82
80	0.80	82	0.82	84	0.84
82	0.82	84	0.84	86	0.86
84	0.84	86	0.86	88	0.88
86	0.86	88	0.88	90	0.90
88	0.88	90	0.90	92	0.92
90	0.90	92	0.92	94	0.94
92	0.92	94	0.94	96	0.96
94	0.94	96	0.96	98	0.98
96	0.96	98	0.98	100	1.00

4. **WARNING:** Over-tension of belts is the number one cause of V-Belt Failure. 10% over-tension of V-Belts result in a reduction of bearing life by 10%.

5. Use Infrared for identifying over tension. Use vibration analysis for loose or damaged belts and strobe-lights for operator or maintenance craft inspections.
6. Upon installation, new belts should be checked for proper tension after 24 hours of operation using a strobe light or tachometer. Failure to execute this process on critical assets could result in V-Belts not meeting expectations of the end user.
7. Tighten all bolts using a torque wrench and proper torque specifications.

# V-BELT MAINTENANCE 101

8. One option is to mark the back side of the V-Belt Guard in Yellow with 2 marks in black which is the expected deflection as the V-Belt rotates. (no shutdown required) As part of Operator Care works great because in most cases an operator walks past the V-Belts and checks "Good" or "Bad" in most production organizations.

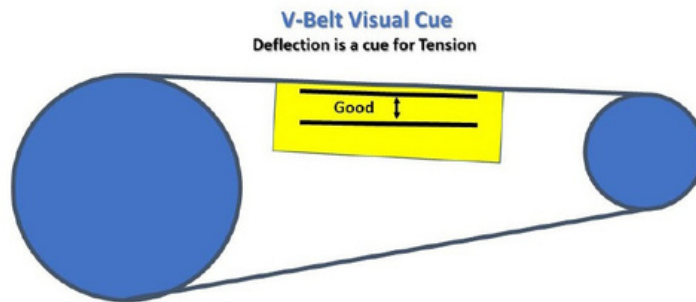

## Failure Modes experienced on V-Belt Drives:

### **Tension Loss**, Caused by:

- Weak support structure
- Lubricant on belts
- Excessive sheave wear
- Excessive load
  - Sub-minimal diameter (see chart)

Belt Cross Section	Min Recommended Datum Diameter (Standard Groove) (in)
Classical V-belts	
AX	2.20
A	3.00
BX	4.00
B	5.40
CX	6.80
C	9.00
D	13.00
E	21.00

### **Tensile Break**, Caused by:

- Excessive shock load

### **Improper belt handling and storage prior to installation (crimping)**

First end, last out checkout for V-Belts

- Belts should be stored in a cool and dry environment with no direct sunlight. Ideally, less than 85° F and 70% relative humidity.

V-belts may be stored by hanging on a wall rack if they are hung on a saddle or diameter at least as large as the minimum diameter sheave recommended for the belt cross section.

When the belts are stored, they must not be bent to diameters smaller than the minimum recommended sheave diameter for that cross section and not store hanging from a hook.

Belts may be stored up to six years if properly stored at temperatures less than 85°F and relative humidity less than 70%.

# V-BELT MAINTENANCE 101

If the storage temperature is higher than 85° F, the storage limit for normal service performance is reduced by one half for each 15°F increase in temperature. Belts should never be stored above 115°F.

**Belt Cracking.** Caused by:


Extreme low temperature at start-up (see chart above)

Extended exposure to chemicals or lubricants

Recommended Baldor V-Belt Troubleshooting Guide. Go to the following for download:  
[library.e.abb.com/public/b76576ebc903091785257b44006cba6a/MN4002\\_4002-310.pdf](http://library.e.abb.com/public/b76576ebc903091785257b44006cba6a/MN4002_4002-310.pdf)


TROUBLE SHOOTER AND SERVICE GUIDE			
	TROUBLE AREA AND OBSERVATION	CAUSE	REMEDY
BELT STRETCH BEYOND TAKE-UP	Belt stretch unequally.	Misaligned drive, unequal work done by belts.	Realign and re-tension drive.
		Belt tensile member broken from improper installation.	Replace all belts with new set properly installed.
	All belts stretch about equally.	Insufficient take-up allowance.	Check take-up and follow allowance on page.
		Greatly overloaded or under-designed drive.	Redesign.
SHORT BELT LIFE	Relatively rapid failure; no visible reason.	Tensile members damaged through improper installation.	Replace with all new matched set, properly installed.
		Worn sheave grooves (check with groove gauge)	Replace sheaves.
		Under-designed drive.	Redesign.
	Sidewalls soft and sticky. Low adhesion between cover plies. Cross-section swollen.	Oil or grease on belts or sheaves.	Remove source of oil or grease. Clean belts and grooves with cloth moistened with alcohol.
	Sidewalls dry and hard. Low adhesion between cover plies. Bottom belt cracked.	High temperatures.	Remove source of heat. Ventilate drive better.
	Deterioration of rubber compounds used in belt	Belt dressing.	Never use dressing on V-belts. Clean with cloth moistened with alcohol. Tension drive properly to prevent slip.
	Extreme cover wear.	Belts rub against belt guard or other obstruction.	Remove obstruction or align drive to give needed clearance.
	Spin burns on belt.	Belts slip under starting or stalling load.	Tighten drive until slipping stops.
	Bottom of belt cracked.	Too small sheaves.	Redesign for larger sheaves.
Broken belts.	Object falling into or hitting drive.	Replace with new matched set of belts. Provide shield for drive.	

Questions or comments: [rsmith@worldclassmaintenance.org](mailto:rsmith@worldclassmaintenance.org).



## Preventive Maintenance Best Practices plus, PM Optimization Workshop

"March 23-25"



"Virtual" via ZOOM (internet) or Live at Southern Wesleyan University  
(4 miles from Clemson, SC and 30 miles from GSP Airport)

Reasons why you should attend...

1. Learn and Practice in the workshop how to write an effective PM Procedure in a "Hands On" Exercise (1 of 20 exercises)
2. Practice "How to Optimize your PMs" in a "Hands On" Exercise" (bring your PMs which we can Optimize in the Workshop)
3. Create an Action Plan using the crawl, walk, methodology to implement when you return
4. ...and so much more

Interested? Questions? – Contact us at [rsmith@worldclassmaintenance.org](mailto:rsmith@worldclassmaintenance.org)  
or go to [www.worldclassmaintenance.org](http://www.worldclassmaintenance.org)



# #1 Software for Maintenance & Reliability Teams

UpKeep is a service-first company that builds software designed to make maintenance easier for technicians and managers everywhere. Reduce downtime up to 18% by switching over to a preventative maintenance solution!

[www.upkeep.com](http://www.upkeep.com)


## Our Products



**Mobile-first maintenance management and collaboration across all location, assets, and teams**

With nearly 340 different machines in our work environment, it's an impossible task to manually assign and track PM's. **With UpKeep we can schedule regular maintenance without overlapping tasks with other critical jobs."**

★★★★★ Paul D, Health and Safety Coordinator

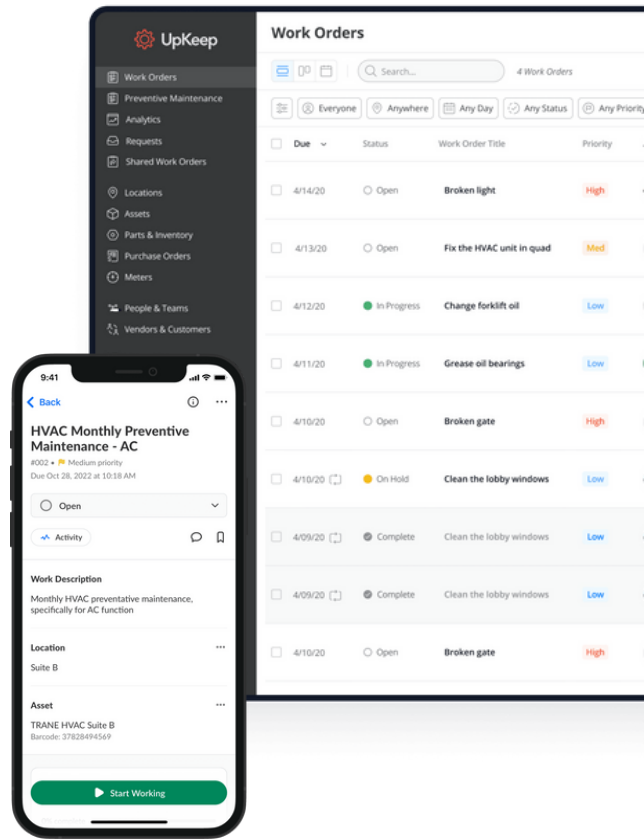

### An end-to-end solution for remote condition-based monitoring

Connected and secure IoT sensors for real-time remote condition asset monitoring



**DATAHUB**  
UpKeep

### Integrated & Centralized Data Ecosystem for World Class Asset Operations

The only purpose built Asset Data Platform. Asset Focused ELT Solution for advanced analytics and integrated, real-time asset data.

### The Maintenance Community Coalition was founded on the belief that working together will benefit everyone within our community

Committed to helping each other thrive in our individual professional journeys by sharing resources and expertise, granting scholarships, hosting events, and unlocking knowledge – always at no cost.



[www.upkeep.com](http://www.upkeep.com)