

## FIABLE HYDRAULICS PVT.LTD

Sector 10, MIDC, Bhosari, Pune, Pimpri-Chinchwad, Maharashtra 411026

E-mail - [fiablehydraulics@gmail.com](mailto:fiablehydraulics@gmail.com)



Website - [www.fiablehydraulics.in](http://www.fiablehydraulics.in)



## SUCTION STRAINER - S C 3

- REUSABLE SS 100 MESH/149 MICRON STD.
- ALUMINIUM DIE CAST NUT
- STEEL CAP/SUPPORT TUBE
- CONTINUOUS EPOXY BOND
- MAX. WORKING TEMP.80 C.
- SUITABLE FOR HYDRAULIC/MINERAL OIL
- FLEXIBLE MAGNETIC WRAP AVAILABLE



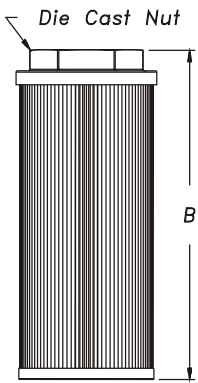

MODEL NO	FLOW LPM	THREAD SIZE A	THREAD CODE	OVERALL LENGTH B	DIA NUT CAP C	NUT A/F	SCREEN AREA (SQ.CMS)	WT KGS	MAGNET WRAP
SC3 -002	8	1/4	02	90	46	24	187	0.10	2
SC3 -003	12	3/8	03	90	46	24	187	0.10	2
SC3 -005	20	1/2	04	105	46	30	226	0.10	2
SC3 -007	28	3/4	06	109	64	35	406	0.20	2
SC3 -010	40	1	08	139	64	46	542	0.20	2
SC3 -015	60	1-1/4	10	139	86	51	929	0.30	2
SC3 -020	80	1-1/2	12	168	86	60	1161	0.35	2
SC3 -030	120	1-1/2	12	200	86	60	1393	0.40	2
SC3 -040	160	2	16	235	100	70	1806	0.55	2
SC3 -050	200	2	16	260	100	70	2032	0.60	2
SC3 -075	300	2-1/2	20	211	150	90	2787	0.85	3
SC3 -100	400	3	24	272	150	100	3677	1.00	3
SC3 -150	600	3	24	345	150	100	4838	1.25	3

**MODEL CODE: ASSEMBLY**

SERIES	SIZE	PORT THDS. SIZE	PORT THDS. SIZE	MICRONS. OPTINAL #	FEATURE SPECIAL 1	FEATURE SPECIAL 2
SC3	-010	**	**	**	**	**
		REFER TABLE OMIT IF STD	<b>B-BSP</b> - STD  <b>N-NPT</b> - OPTIONAL	<b>149</b> - SS 100 MESH STD <b>125</b> - SS 120 MESH <b>100</b> - SS 150 MESH <b>074</b> - SS 200 MESH <b>063</b> - SS 250 MESH Also - 30/60 MESH	<b>RB 3</b> - 3 PSI ByPass  Optional	<b>M</b> - Magnet Wrap  Optional