


B16.5 ANSI Series A Class 900 Blind

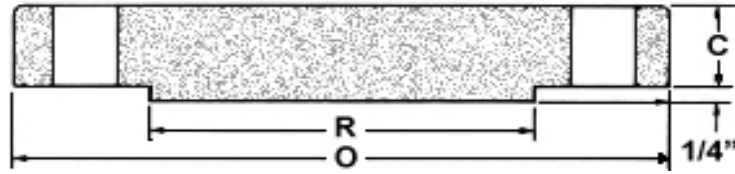

Blind

Nom Size	Thickness			Drilling				Blind Weight
	OD	Blind	OD of RF	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	C	R					
26	42.75	6.31	29.50	37.50	18.75	2.88	20	2566
28	46.00	6.75	31.50	40.25	19.75	3.12	20	3178
30	48.50	7.18	33.75	42.75	20.50	3.12	20	3758
32	51.75	7.62	36.00	45.50	22.00	3.38	20	4541
34	55.00	8.06	38.00	48.25	23.00	3.62	20	5425
36	57.50	8.44	40.25	50.75	23.75	3.62	20	6209
38	57.50	8.50	43.25	50.75	24.50	3.62	20	6253
40	59.50	8.81	45.75	52.75	25.00	3.62	24	6940
42	61.50	9.12	47.75	54.75	25.75	3.62	24	7675
44	64.88	9.56	50.00	57.62	27.00	3.88	24	8954
46	68.25	10.06	52.50	60.50	28.50	4.12	24	10426
48	70.25	10.38	54.50	62.50	29.00	4.12	24	11398

*Dimensions are in inches. Weights are in pounds.
Minimum Industry Specifications*