

# Kruze

CSC

*California SideCar*

Trike Conversion Kit for the Kawasaki Voyager, Vaquero and Nomad



Adding more LIFE to your riding years... and more YEARS to your riding life!


Introducing California SideCar's first trike for the Kawasaki brand of motorcycles. This unique trike body compliments the styling features of the motorcycle from the fuel tank lines to the tear-drop style tail lights of the Voyager and Nomad models.



*Optional Luggage Rack*



*8.1 cu. ft. Storage Capacity*

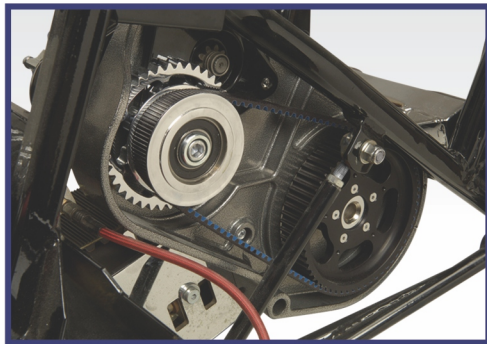

*Optional Electric Belt Drive Reverse*

## SUSPENSION

### Independent Suspension

- Performance designed independent suspension with vertically stabilized opposing Rocker Mono Shock
- Shock Spring: 300 lb/in linear wound racing spring designed to accommodate up to 650 lb payload

## DRIVETRAIN

### Drivetrain

- Twin reduction jackshaft belt drive with 50mm Gates performance belt and new purpose designed sprockets

## BRAKE SYSTEM

### Disc Brake System

- Standard: Alloy calipers with 11.5" purpose designed rotors
- Performance Brake (optional upgrade): Custom designed nickel plated drilled rotors with a custom four piston billet caliper. Calipers are brushed aluminum, red anodized and engraved with "CSC"

## REVERSE

### Electric Belt Drive Reverse\*

- Safety lockout switch
- Start button activated
- Illuminated activation light
- Easy, one-step deactivation

## OPTIONS

### Optional Accessories

- Power Trak
- Shock Spring Preloader
- Chrome Wheel Well Trim
- Luggage Rack (Nomad)
- Passenger Backrest (Nomad)
- Fender Bra Kit : Marine Grade black vinyl with "CSC" embroidered logo
- Choice of Multiple Wheel Designs

### Options in Development:

- Ground Effects

*\*Optional Accessory*

## Specifications (fits 1700 cc models only)

Curb Weight	1221 lbs (553.8 kg)
Rated Load Capacity	650 lbs (295 kg) (higher and lower spring rates available)
Trunk Storage Capacity	8.1 cu ft (229.4 cu cm)
Wheel Base with Power Trak	76.5 in (194.3 cm)
Overall Length with Power Trak	112 in (284.5 cm)
Overall Width with Chrome Wheel Well Trim	61 in (154.9 cm)
Ground Clearance	4.5 in (11.5 cm)
Standard Wheel Size	15 X 6.5 in, 5 on 100 mm bolt pattern, 30mm offset
Standard Tire Size	205/60-15