



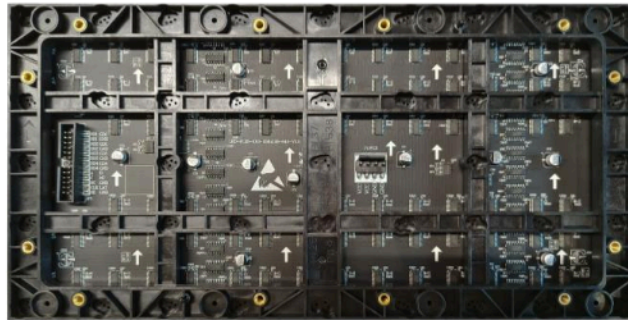

Product Specification


P1.25 Indoor

Product Picture of P1.25 Indoor

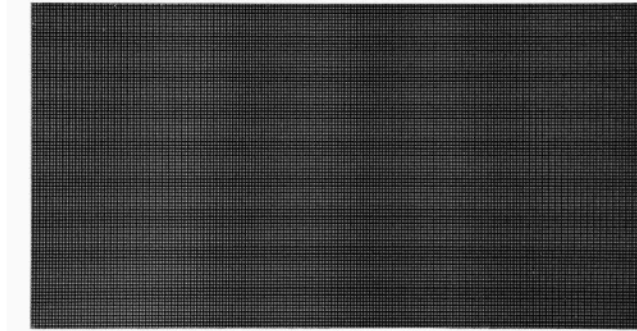



Note: The picture is for reference only, the specific object shall prevail.

Hole Position of P1.25 Indoor

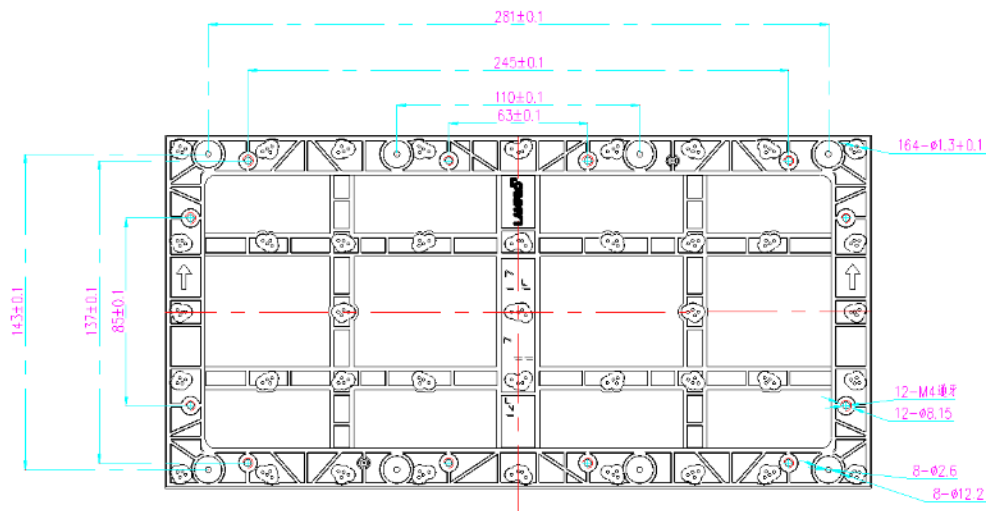

Note: Drawings are for reference only.

Wiring Diagram of Data and Power

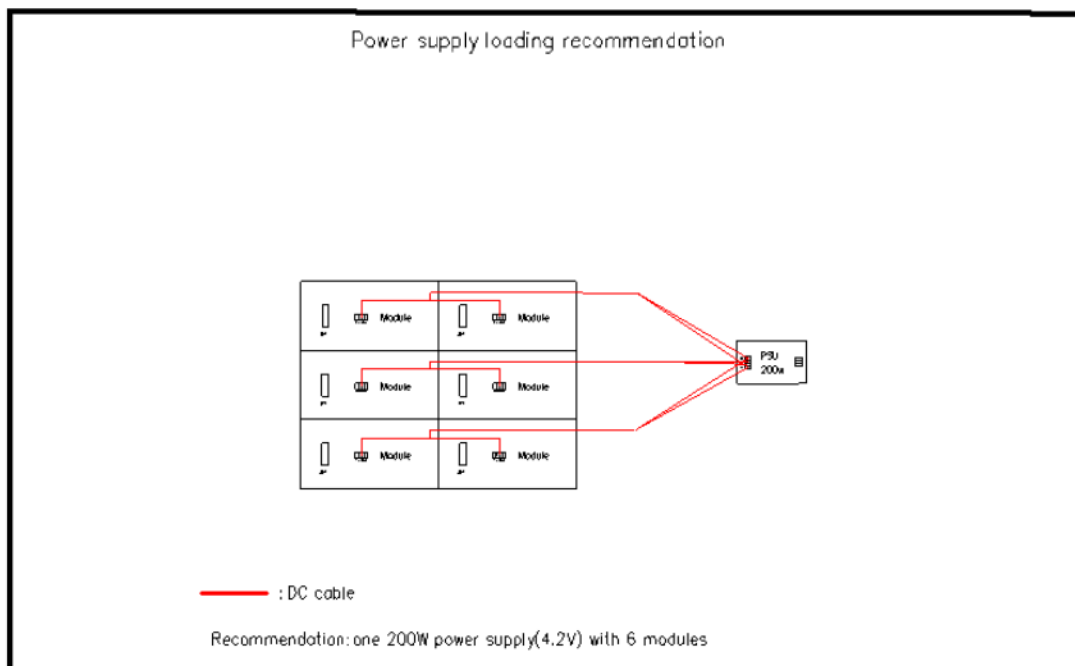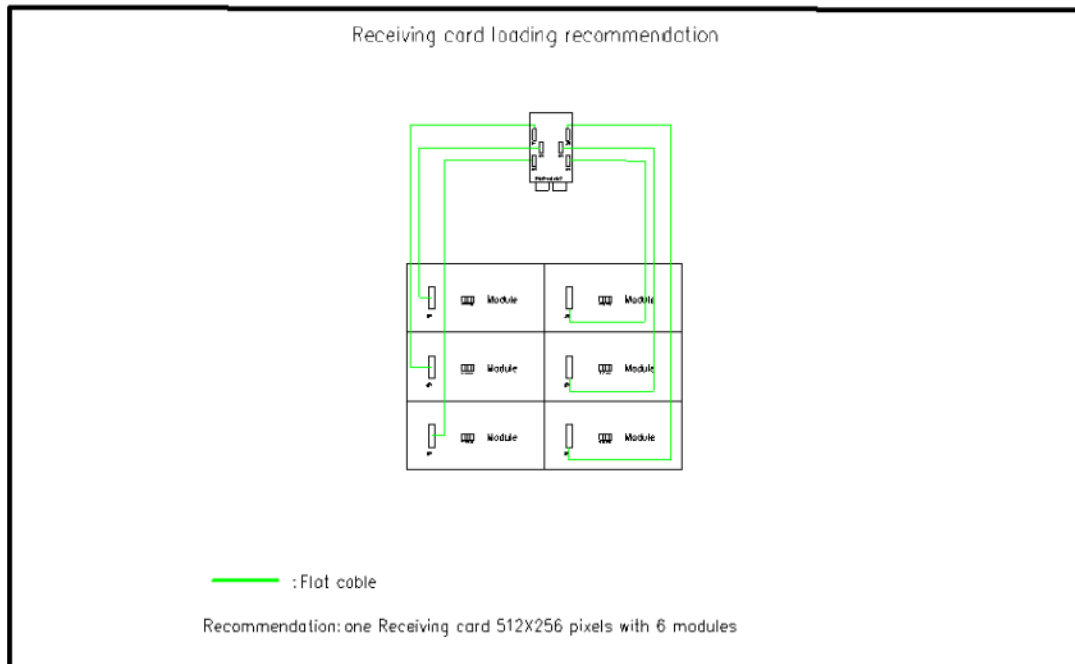

Remark:

1. The recommended diagrams are for reference only.
2. The recommended cabinet size is 640X480 mm.

Parameter of P1.25 Indoor

	Parameter Name	Product Parameter
Module	LED Type	SMD1010
	Pixel Pitch	1.25mm
	Module Resolution (W×H)	256*128=32768Pixels
	HUB	HUB320
	Module Dimension(W×H×D)	320mm×160mm×16.6mm
	Module Weight	0.48±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	500 CD/m ²
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	5000 : 1
Electronic	Input Power <Max>	586W/m ²
	Input Power <Typical>	176W/m ²
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Refresh Rate	3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	100000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~45°C / 10%~50%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-20°C~50°C / 10%~60%RH (No Condensation)

- Remark:**
1. The above parameters are typical or recommended.
 2. Product parameters or configuration adjustments without notice.
 3. Customized products, please confirm the parameters with our company.