
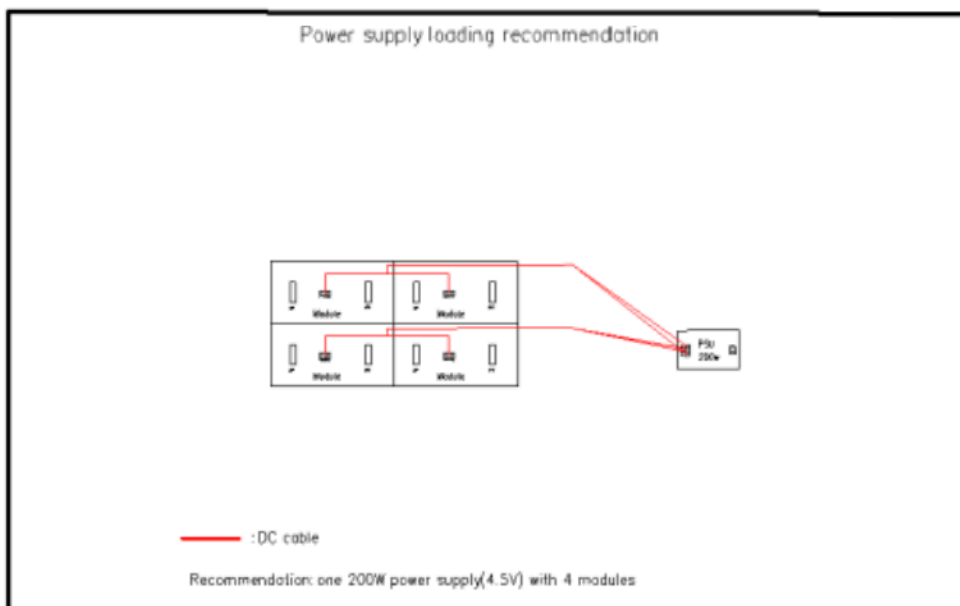


WIRING DIAGRAM OF DATA AND POWER

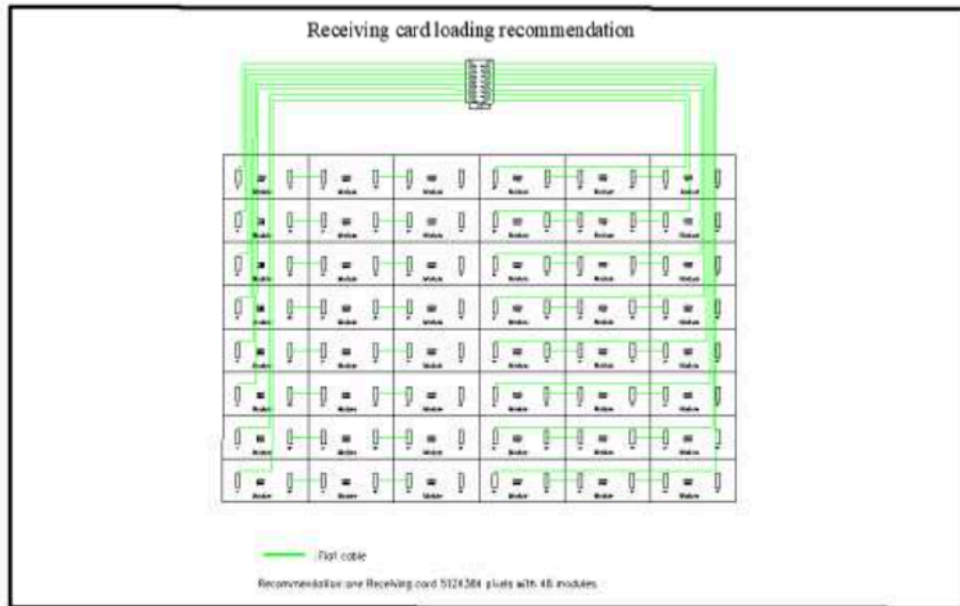

Remark:

1. The recommended diagrams are for reference only.
2. The recommended cabinet size is 960X960 mm.

SPECIFICATION PARAMETERS:

	Parameter	Value
Module	Pixel Pitch	8mm
	LED Type	SMD2727
	Module Resolution (W×H)	40X20=800 Pixels
	Pixel density (pixels/sq.m.)	15625 dot/m ²
	Module Size (WxHxD)	W320mmxH160mmxD18.5mm
	Module Weight	0.48±0.02kg
	HUB	HUB75
Optical	Single-dot Brightness Calibration	Support
	Brightness	4000~4500 cd/m ²
	Color Temperature	6500K (1000K ~ 9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Brightness/Color Uniformity	≥98%
	Contrast Ratio	5000:1
Electronic	Input Power <Max>	879 W/m ²
	Input Power <Typical>	293 W/m ²
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Refresh Rate	1920Hz
	Processing Depth	12~14Bit
	Video Support	2K HD, 4K UHD
Environme	Life Span (hrs)	100000hrs
	Working Temp/Humidity (°C/RH)	-20°C~50°C / 10%~80%RH (No Condensation)
	Storage Temp/Humidity (°C/RH)	-20°C~55°C / 10%~85%RH (No Condensation)
	Certification	BIS/CE/CB/ROHS/EAC

Note:

- 1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- 2.The specification parameters are reference values. Part of the data comes from Unilumin' s internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
3. Different configurations can achieve different refresh rates.