



Wall Mount Low Frequency Horns and Horn-Strobes

Genesis LED G4LF Series

Overview

Genesis LED G4LF Series Low Frequency Horns and Horns-Strobes comply with the low frequency requirements spelled out in NFPA 72 and meet UL 464 520Hz audible tone standards for sleeping areas. They feature a sleek low-profile design and energy-efficient technology that makes them less expensive to install and operate by reducing overhead. High performance LEDs require fewer power supplies, backup power, and batteries. These new appliances are designed with, energy-efficiency and life safety in mind.

Genesis LED G4LF Series uses high efficiency optics, combined with patented electronics, to deliver a precisely controlled and efficiently focused light distribution pattern in exchange for lower current requirements. Strobes feature field-selectable 15, 30, 75 or 110 candela light output.

Compared with Xenon-type strobes, Genesis LED G4LF Series appliances need fewer power supplies and often smaller wire gauge, which lightens conduit requirements. They are also backwards compatible with legacy strobes, so there's no need to replace all your existing devices to upgrade to new LED technology. In fact, G4LF strobes can be mixed on the same circuit and used in the same field of view as Xenon-based strobes. This makes Genesis LED G4LF Series ideal for new installations and retrofits alike.

Field-configurable sound output levels provide the flexibility modern life safety projects demand, while the Genesis LED control protocol keeps multiple strobes on compatible NAC circuits synchronized to meet or exceed NFPA 72 requirements.

Serviceability is another area where G4LF Series appliances shine. The universal room side wiring plate allows for pre-installation of the electrical wiring as well as checking continuity with the included diagnostics check bar. G4LF Series appliances can then be easily snapped into place with the confidence of knowing the wiring is correct. The innovative under-cover diagnostic test points provide easy access to device circuit testing while mounted.



Standard Features

- **High Performance LED Strobe Technology**
 - Ultra low device current consumption allows:
 - More devices per circuit
 - Ability to use lower gauge wire
 - Longer wire runs
 - Fewer booster power supplies
 - High efficiency optics
 - Selectable 15, 30, 75, or 110 cd light output
 - LED devices may be mixed with legacy Xenon strobes
- **Current draw is the same for all candela output settings**
 - Easier for new system design
 - Flexible for future changes in candela output needs
- **Low Frequency (520Hz) Audible Output**
 - Low frequency output meets NFPA standards for newly constructed commercial sleeping areas
 - Selectable high or low dB horn output
 - Selectable temporal or steady horn output
 - Improved audio frequency range for better wall penetration
- **Low-profile Design**
 - Ultra-slim... protrudes about 1.5" from the mounting surface
 - Attractive appearance... no visible mounting screws
- **Multiple "FIRE" Marking Options**
 - Order English, French, Spanish or no FIRE markings
 - Change markings at any time with replaceable quick-swap covers
 - Custom color UL / ULC listed non marked covers to match architectural or design requirements are available
- **Easy to Install**
 - Pre-install and pre-wire with convenient universal room side wiring plate
 - Check electrical continuity on room side wiring plate with included diagnostics check bar
 - Diagnostics port streamlines device circuit testing
 - Fits 1-gang, 2-gang, 4-inch square, and 4-inch octagon electrical boxes
 - Optional red and white trim plates available
 - Slide switches for field configuration
 - 12 to 18 AWG in-out screw terminals for quick wiring

Audible Signal Application

Genesis LED G4LF Series notification appliances are UL 464-listed for 520Hz low-frequency audible requirements and suitable for sleeping areas as per NFPA 72.

Most codes and regulations now call for low-frequency audible appliances (520 Hz) in existing and newly constructed sleeping rooms and require strobe lights under some of these circumstances. Consult with your Authority Having Jurisdiction for details. For sleeping rooms, most codes and standards require 75 dBA-fast at the pillow.

Genesis LED G4LF Series Low Frequency 520Hz horn output reaches as high as 83 dBA and features an improved audio frequency range compared with other Genesis LED horns. This results in excellent sound penetration through walls and a clear warning of danger for sleeping areas. Horn only models may be configured for either coded or non-coded notification appliance circuits. They can also be set for high or low dBA output. This setting reduces horn output by about 5 dBA. Horn-only models may be ceiling-mounted or wall-mounted.

For non-sleeping rooms, the suggested sound pressure level for each signaling zone used with alarm signals is at least 15 dBA above the average ambient sound level, or 5 dBA above the maximum sound level having a duration of at least 60 seconds, whichever is greater. These values are measured at five feet (1.5 m) above the floor. The average ambient sound level is A-weighted, fast response sound pressure measured over a 24-hour period.

Doubling the distance from the signal to the ear will theoretically result in a 6 dBA reduction of the received sound pressure level. The actual effect depends on the acoustic environment in the space. A 3 dBA difference represents a barely noticeable change in volume.

Visible Signal Application


Genesis LED G4LF Low Frequency horn-strobes are UL 464-listed and are also UL 1971-listed, for use indoors as wall-mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed 105 dBA (87 dBA in Canada), where occupants use hearing protection, and in areas of public accommodation as defined in the *Americans with Disabilities Act*.

Combination audible-visible appliances are installed in accordance with guidelines established for visible (strobe) devices.

For sleeping rooms as outlined by NFPA, a strobe is generally required within 16 feet of the pillow. Genesis LED G4LF low-frequency horn-strobes are designed to meet these standards, offering light output of up to 110 candela, these units are compliant with NFPA wall-mounting requirements for sleeping rooms, with mounting positions set at or farther than 24 inches (610 mm) from the ceiling, ensuring optimal performance for occupant safety.

Synchronization is important to avoid triggering seizures in people with photosensitive epilepsy. All Genesis strobes exceed UL synchronization requirements (within 10 milliseconds over a two-hour period) when used with a synchronization source. See the specifications table for a list of compatible sources.

EDWARDS recommends that these devices always be installed in accordance with the latest recognized edition of national and local codes. Refer to the appropriate codes and standards for mounting height information.


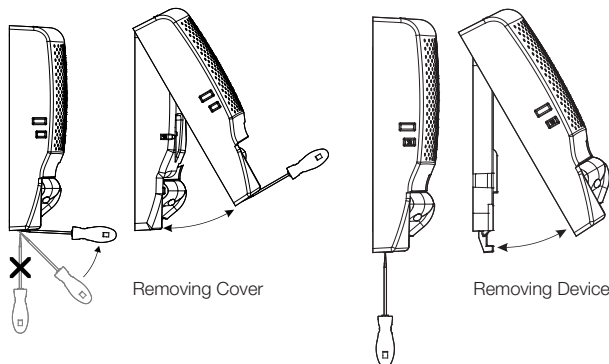


Installation


Genesis LED G4LF Low Frequency horns and horn-strobes mount to the required GRSW room side wiring plate. The GRSW mounting plate is ordered separately from the G4LF & G4LFV device in packs of 10 (GRSW-10) for convenient pre-installing and pre-wiring. The device can be removed easily from the room side wiring plate by pushing up with a flat tip screwdriver or using the GRT Genesis LED Removal Tool ordered separately in packs of 10 (GRT-10). The cover can also be removed from the device easily with a flat tip screwdriver or using the GRT Genesis LED Removal Tool to access the light and sound output settings and a diagnostics test port for voltage testing.

Genesis LED G4LF Series Low Frequency horns and horn-strobes mount to any standard one-gang, two-gang, 4-inch square, and 4-inch octagon electrical box. Matching optional G4T trim rings are available to cover oversized openings. Optional color matched double-gang surface boxes are also available.

When installing Genesis LED G4LF series appliances onto 4-inch octagon boxes, Genesis GOCT Octagon Adapter is required to ensure seamless mounting. The GOCT attaches to the GRSW wiring plate, guaranteeing a secure and efficient setup.

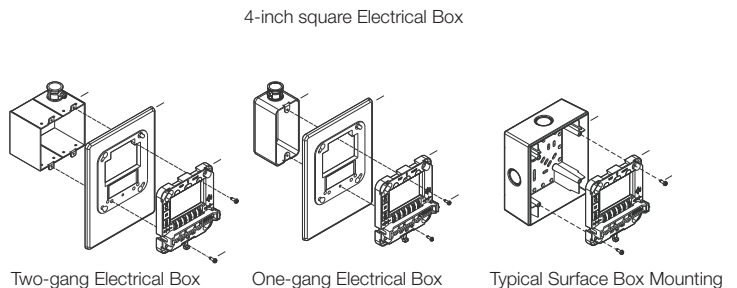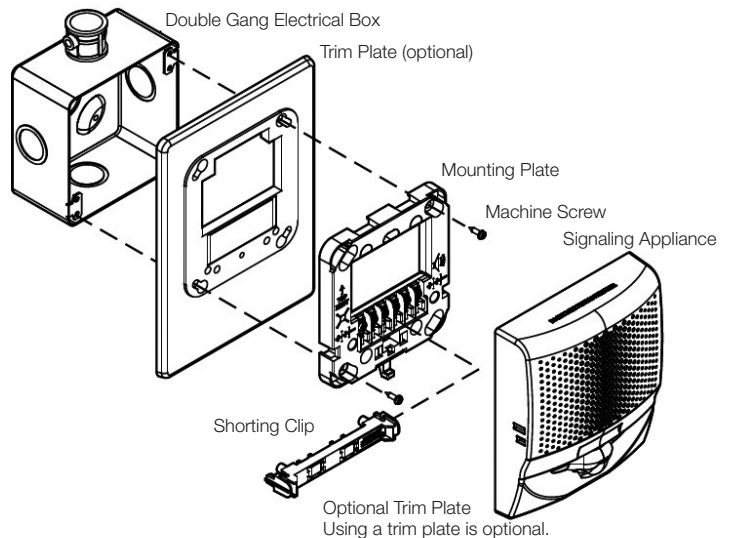


Wiring

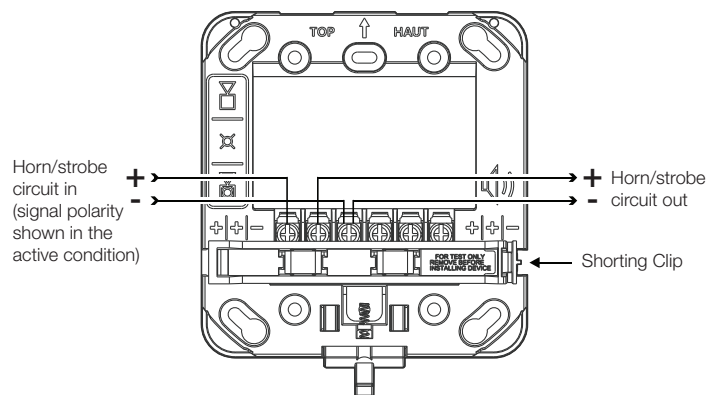


Dimensions


G4 Notification Appliances

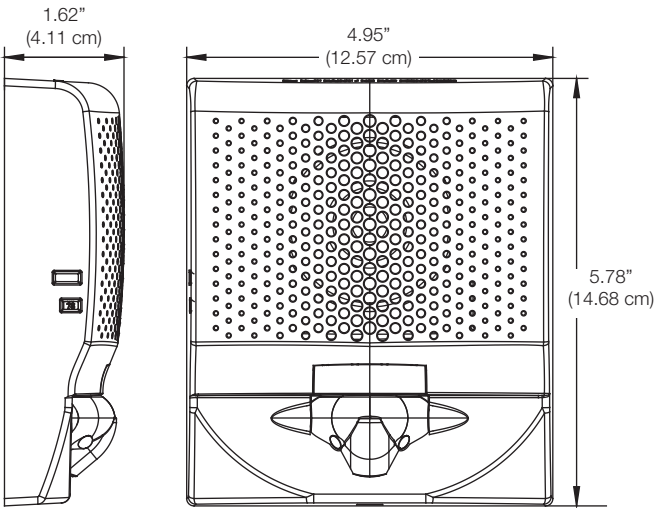

G4T Trim Plate (optional)

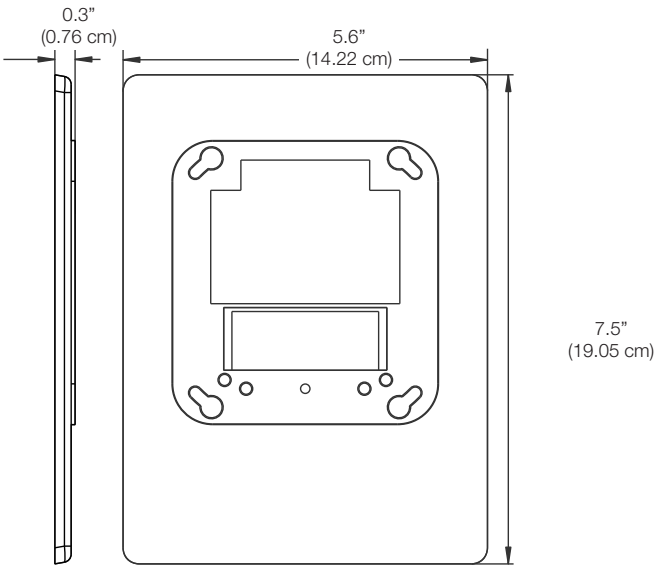

Diagnostics

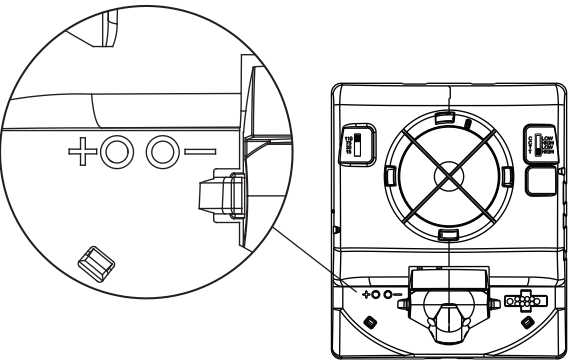

Test points indicated above are used to validate the Notification Appliance Circuit and verify device function.

Field Configuration


Temporal Low Frequency horn and horn-strobe models are factory set to sound in a three-pulse temporal pattern. By sliding the tone selector switch, horn only models may be configured for constant horn output that can be coded at precise intervals by EDWARDS control panels and control modules.

Note: Temporal 3 coding is the required output for fire notification devices per NFPA 72. Any device coding other than temporal 3 is at the discretion and approval of the local authority having jurisdiction (AHJ).

Low frequency horns and horn-strobes are factory set for high dB output. Low dB output may be selected by sliding the tone selector switch. This reduces the output by about 6 dBA.

Genesis LED clear strobes and horn-strobes may be set for 15, 30, 75, or 110 candela output. The output setting is changed by simply removing the cover and sliding the candela switch to the desired setting. The device does not have to be removed from the wall to change the output setting. The setting remains visible through a small window on the left-hand side of the device after the cover is closed.

Light and Sound Output Settings

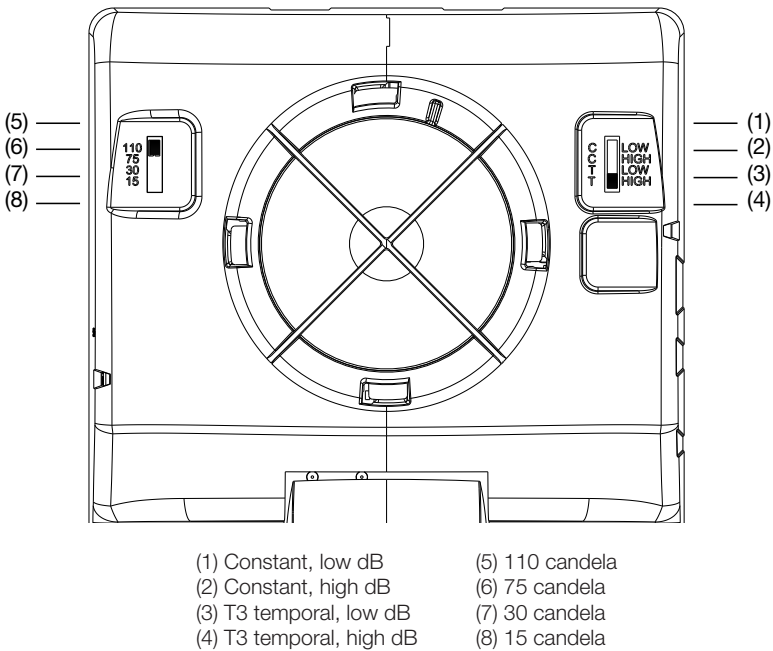

Operating current

Horns

| Sound setting | 16 to 33 VDC | 16 to 33 VFWR |
|----------------|--------------|---------------|
| C-Low, T-Low | 43 mA | 82 mA |
| C-High, T-High | 123 mA | 198 mA |

Horn-Strobes

| Strobe setting | Sound setting | 16 to 33 VDC | 16 to 33 VFWR |
|----------------|----------------|--------------|---------------|
| 15, 30, | C-Low, T-Low | 66 mA | 103 mA |
| 75, 110 | C-High, T-High | 159 mA | 230 mA |

Sound Output


Horn & Horn-Strobe

| Sound setting | Low dB(A) | High dB(A) |
|---------------------|-----------|------------|
| Continuous/Temporal | 78 dBA | 83 dBA |

Sound pattern (ULC)

| Axis | Angle | Change in output |
|------------|--------|------------------|
| Horizontal | +/- 42 | -3 dBA |
| | +/- 75 | -6 dBA |
| | +/- 90 | -8.3 dBA |
| Vertical | +/- 37 | -3 dBA |
| | +/- 81 | -6 dBA |
| | +/- 90 | -7.3 dBA |

Light Distribution

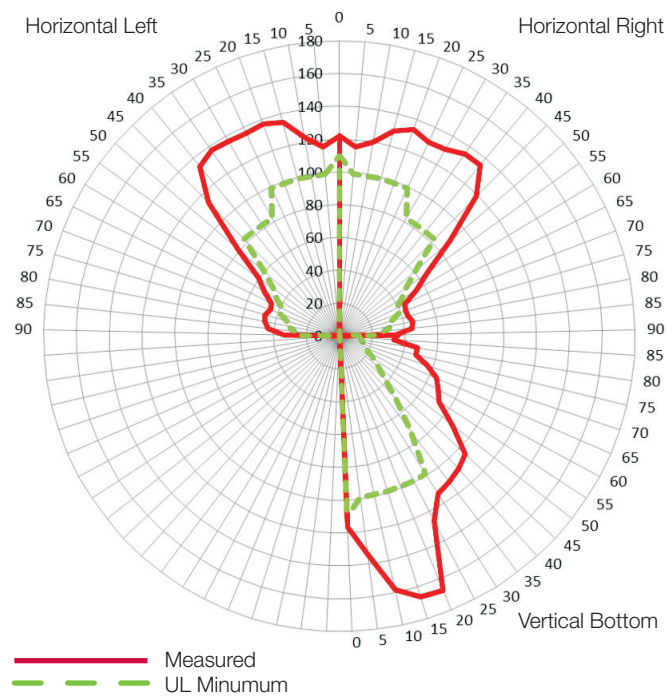


Specifications


| | |
|---------------------------------|--|
| Operating voltage | 16 to 33 VDC, 16 to 33 VFWR |
| Horn signal type | Constant or TC3 temporal |
| Light output | 15, 30, 75, or 110 candela |
| Strobe flash rate | 1 fps (flash per second) approx. |
| Synchronization | 20 Ω max. between any two devices. To determine allowed wire resistance, refer to these specifications, and the specifications for the synchronized signal source. |
| Synchronization Sources | Edwards CC Series Signal Modules, Booster and Auxiliary Power Supplies, Intelligent and Conventional Control Panels |
| Wire size | 12 to 18 AWG (0.75 to 2.50 mm ²) |
| Dimensions (WxHxD) | 4.95 x 5.78 x 1.62 in (12.57 x 14.68 x 4.11 cm) |
| Strobe-to-box center offset | -1.70 inches (-4.32 cm) |
| Compatible electrical boxes [1] | 1-gang, 2-gang, 4-inch square, 4-inch octagon with GOCT adapter plate, surface mount G4RSB, G4WSB |
| Trim plates | G4TR, G4TW (5.6 x 7.5 x 0.3 in (14.22 x 19.05 x 0.76 cm)) |
| Wiring plate | GRSW (Catalog number: GRSW-10, Pack of 10) |
| Operating environment | |
| Temperature | 32 to 122°F (0 to 50°C) |
| Relative humidity | 0 to 93% noncondensing |
| Environmental class | Indoor, dry |
| Storage Temperature | -40 to 158 F (-40 to 70 C) |
| RAL Color | Red=RAL 3013 White=RAL 9002 |
| Environmental Compliance | RoHS directive 2011/65/EU |
| Industry Canada compliance | This Class A digital apparatus complies with Canadian ICES-003 |




[1] Electrical boxes must be at least 1-1/2 in. (3.81 cm) deep.

Ordering Information








FOR REFERENCE ONLY

| Notification Appliances | | Color | Marking |
|--|-----------|-------|----------|
|  Low Frequency Horns | G4LFRF | Red | FIRE |
| | G4LFRF-FR | Red | FIRE/FEU |
| | G4LFRF-SP | Red | FUEGO |
| | G4LFRN | Red | None |
| | G4LFWF | White | FIRE |
| | G4LFWF-FR | White | FIRE/FEU |
| | G4LFWF-SP | White | FUEGO |
| | G4LFWN | White | None |


| | | | |
|---|------------|-------|----------|
|  Low Frequency Horn-strobes | G4LFVRF | Red | FIRE |
| | G4LFVRF-FR | Red | FIRE/FEU |
| | G4LFVRF-SP | Red | FUEGO |
| | G4LFVRN | Red | None |
| | G4LFWWF | White | FIRE |
| | G4LFWWF-FR | White | FIRE/FEU |
| | G4LFWWF-SP | White | FUEGO |
| | G4LFWWN | White | None |

| Replacement Appliance Covers | | Color | Marking |
|---|---------------|-------|----------|
|  Horn Covers | G4ARA-CVR | Red | ALERT |
| | G4ARF-CVR | Red | FIRE |
| | G4ARF-FR-CVR | Red | FIRE/FEU |
| | G4ARF-SP-CVR | Red | FUEGO |
| | G4ARN-CVR | Red | None |
| | G4AWA-CVR | White | ALERT |
| | G4AWF-CVR | White | FIRE |
| | G4AWF-FR-CVR | White | FIRE/FEU |
|  Horn-strobe Covers | G4AVRA-CVR | Red | ALERT |
| | G4AVRF-CVR | Red | FIRE |
| | G4AVRF-FR-CVR | Red | FIRE/FEU |
| | G4AVRF-SP-CVR | Red | FUEGO |
| | G4AVRN-CVR | Red | None |
| | G4AWA-CVR | White | ALERT |
| | G4AWWF-CVR | White | FIRE |
| | G4AWWF-FR-CVR | White | FIRE/FEU |
|  Horn-strobe Covers | G4AWWF-SP-CVR | White | FUEGO |
| | G4AWN-CVR | White | None |

Accessories


| | | | | | |
|--|---|--|------------------------------------|--|--------------------------------------|
|  GRSW-10 | Room Side Wiring Plate (required, ordered separately) |  G4TR | Trim plate, G4 Series, red |  G4TW | Trim plate, G4 Series, white |
|  GOCT | 4-inch octagon box Adapter Plate |  G4RSB | Wall 4 inch Surface Mount Box, Red |  G4WSB | Wall 4 inch Surface Mount Box, White |
|  GRT-10 | Genesis LED Device / Cover Removal Tool 10 pack | | | | |

Model Number Syntax, Appliances

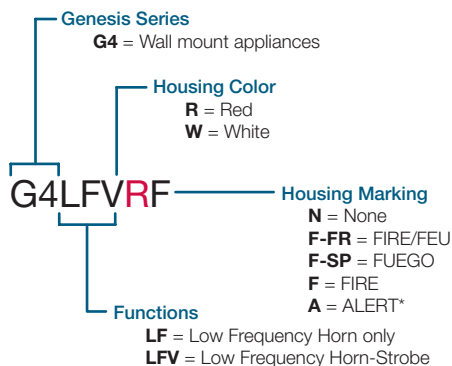

* ALERT Marking available. See replacement covers for more options.

Model Number Syntax, Replacement Covers

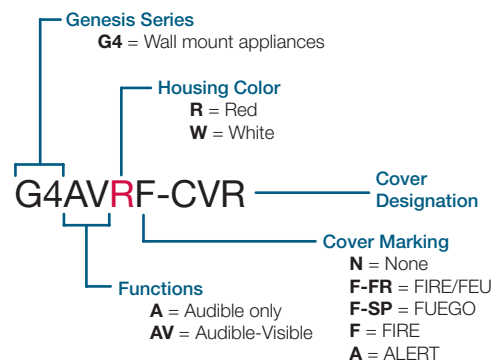

Note: G4A & G4AV wall mount appliance covers are compatible with G4LF & G4LFV Series Wall Low Frequency appliances.



Contact us

Phone: 800-655-4497 (Option 4)

Email: edwards.fire@carrier.com

Website: edwardsfiresafety.com

8985 Town Center Pkwy
Bradenton, FL 34202

© 2025 Walter Kidde Portable Equipment, LLC.
All rights reserved.
