

## la marzocco products

Espresso machines and grinders  
trusted by the world's finest coffee  
roasters, baristas, and cafés; for their  
reliability, durability, and timeless  
aesthetics.

Founded in 1927 by Giuseppe and Bruno Bambi, La Marzocco had its beginnings in Florence, Italy, birthplace of the Italian Renaissance and home to such geniuses as Leonardo da Vinci, Michelangelo, and Brunelleschi who created some of the most celebrated works of art in the world.

It seems only fitting La Marzocco would earn a reputation for making beautiful, high-quality, superbly crafted, and uniquely designed espresso machines, with great attention to detail.

In 1939, it was La Marzocco that invented and patented the first coffee machine with a horizontal boiler, now an industry standard. This was the first of a series of important innovations, later to include the dual-boiler system with saturated brewing groups.

Tradition and a passion in the search for quality and superior reliability are factors which have always distinguished the entire company. Even today, highly specialized personnel supervise each stage in the production of every single machine, hand-crafted to order, for each and every client. In this way, Giuseppe Bambi's experience and professional pride live on after ninety years.

La Marzocco remains an artisan company, while offering important advancements in equipment technology to its customers and the industry.



**la marzocco**

handmade in florence



# why la marzocco

La Marzocco, founded in 1927 in Florence by Giuseppe and Bruno Bambi, is an Italian company specializing in high-end espresso coffee machines. We have a warehouse, training facility, and offices in 403 EDSA Corner, AM Group Building, Quingua St., Makati City, and a team of sales and tech professionals across Luzon, Visayas, and Mindanao. When you buy a La Marzocco machine from AM Group Asia, Philippines, expect quality, support, and connection.

## quality

### HANDMADE MACHINES



- All La Marzocco machines are designed for performance and reliability. Across our product line, the baseline is best-in-class.
- Every machine is thoroughly bench-tested and checked before leaving our Seattle warehouse so it arrives to you ready to perform.
- A century of craftsmanship combined with the highest-quality materials give each La Marzocco a longevity that leads to higher resale value and lower operating costs over time.

## support

### IN-HOUSE SUPPORT AND INVENTORY



- Our Logistics Team manages a constant inflow and outflow of machines so that we have what you need in stock and can get it to you as fast as possible.
- Call and speak directly to La Marzocco staff – our expert Solutions Team is here to help.
- Our support resources include full installation and maintenance documentation and a network of third-party industry-leading technicians across the country.

## connection

### TO THE GLOBAL LA MARZOCCO FAMILY



- Every purchase connects you to a global community of passionate coffee professionals.
- Our factory outside of Florence, Italy is net-zero solar, as part of our commitment to sustainability and social responsibility.
- La Marzocco machines can be found in almost every major city around the globe, as a symbol of delicious espresso and a beloved tool for passionate baristas.

# business considerations

The espresso machine is the heart of your business, so it's important to discuss the following factors with a La Marzocco salesperson or reseller before deciding on your specific espresso machine. Considering these factors will guide you to purchasing the best equipment for your business.

## water

Water analysis is a must before installing any espresso machine, and your specific needs will vary by geography. Work with your reseller to determine your filtration needs for your area and equipment.

## power

Electrical power will affect the size and model of machine you can consider. Before choosing your equipment, confirm the electrical supply specifications in your location.

## maintenance

Regular maintenance is part of owning an espresso machine, but some machine features require more attention than others. If you're miles away from a qualified service provider, a simpler model may best fit your needs.

## bar layout & design

How much counter space can you dedicate to an espresso machine? How will customers order, interact, and move through your café? We offer different solutions depending on your specific needs.

## coffee menu

If coffee will be the star in your space, you'll need a machine that can keep up. Improved temperature stability, programming flexibility, and advanced features help you consistently deliver beautiful coffee to your customers.

## volume

Busy shops with short ticket times benefit from more group heads and greater automation. If you expect to have a line out the door all day, you'll be looking for a dependable workhorse with key functions automated.





# machine considerations

What does it mean to own and operate an espresso machine? Considering three of the most important factors – reliability, consistency, and design – will help you prioritize your options and choose a machine that drives your business forward.

## reliability

### OWN A LONG-TERM INVESTMENT



When deciding on an espresso machine, it's important to consider one that has proven reliability and craftsmanship. The espresso machine will be core to your business, and it is crucial that it keeps producing drinks every day with little down time. This is achieved with time-tested components, solid engineering, and a readily available, well-trained service network.

## consistency

### BRING CUSTOMERS BACK



Your customers expect to get a great cup of coffee every time they visit your business. This can only be achieved with a machine that gives you consistency every time you brew. You should choose a machine that has systems built to ensure each cup will reach the highest standard.

## design

### ATTRACT AND DELIVER



Customer expectations are first set by the design of your space. It is important to invest in beautifully designed equipment, with a wide range of customization options. Beyond outward appearance, the machine should be designed with workflow and ergonomics in mind to ease the job of the barista and speed of service.

# la marzocco technology

All La Marzocco machines are equipped with distinctive technologies that are appreciated by baristas all over the world. These technologies are core to what makes La Marzocco machines perform the way they do.



**dual boiler system**




The Dual Boiler System was patented by La Marzocco in 1970, an idea from its founder Giuseppe Bambi. The idea came from Giuseppe's belief that the brewing temperature is as important as, and possibly even more important than, the brewing pressure. Having one boiler dedicated to steam, and a second to coffee brewing water allows the barista to directly adjust brewing temperature to keep it more stable and consistent.



**saturated groups**



Developed alongside the Dual Boiler System, Saturated Groups technology is based on the presence of just water – and no air – inside the brew boiler and group. A water / air mixture inside the brew boiler and the group would reduce the temperature stability of the machine. Attaching the group directly to the brew boiler creates a single chamber so that water circulates continuously, maintaining consistent temperature.



**PID controller**



The PID Controller employs an algorithm to regulate when and for how long the heating element is engaged in the brew boiler, allowing more efficient and stable regulation of energy. With this level of control, temperature variability is reduced dramatically, making for a more consistent brew temperature. The barista is able to adjust the brew boiler temp to a precise numerical value through the machine's electronics.



## handmade construction



On the production floor, every machine is the outcome of the careful and passionate work of the hands of more than ten expert craftspeople, with no robots involved. Skilled artisans and experienced workers oversee every stage of the production process, which lasts an average of two weeks per machine.



## stainless steel



La Marzocco uses only surgical grade AISI 316L stainless steel for boiler production. This material dramatically reduces the amount of heavy metals that could get dissolved into the water used for brewing coffee and producing steam. La Marzocco's R&D Department is continuously working on minimizing the number of components inside the machine that are not made of stainless steel.



## auto brew ratio (ABR)



Auto Brew Ratio uses precision scales built into the drip tray of the Linea PB, GB5 S, Strada, KB90, and Modbar AV. The Auto Brew Ratio scales are incorporated into the espresso machine's electronics system and provide the barista with a new level of consistency and confidence, by giving control over final beverage mass.



LA MARZOTTO

# machine configurations

La Marzocco offers a range of machine configurations to match the needs of your business. More manual configurations allow baristas closer engagement with brew parameters like pre-infusion and pressure. More automated configurations allow the barista to program a repeatable output and give more of their focus to customer engagement. The style and volume of your business will be crucial in deciding which configuration to choose.



## espresso machine configurations

### manual

slower with more ability to manipulate

### automatic

faster with more consistency

#### MP | EP | LEVER

##### MANUAL



The barista manually controls pre-infusion and pressure during the shot. The barista starts and stops the shot to achieve the preferred coffee volume.

#### EE

##### SEMI-AUTOMATIC



The barista starts and stops the shot with either a push button or paddle interface to achieve the preferred coffee volume.

#### AV

##### AUTO-VOLUMETRIC



The barista starts the shot and the machine stops it, based on the pre-programmed volume of water running through the coffee to achieve the preferred coffee volume.

#### ABR

##### AUTO WITH SCALES



The barista starts the shot and the machine stops it, based on the weight of the coffee in the cup. Auto Brew Ratio utilizes a built-in scale to achieve the preferred coffee weight.

la marzocco

# machine models

La Marzocco distributes three categories of espresso machines. We offer Traditional Bar machines, Under-Counter components for customers wanting to differentiate the look and bar-flow of their café, and Light Commercial / Home machines for customers with space and electrical limitations.

## TRADITIONAL BAR



p.16

model: **linea classic s**  
no. groups: **1 | 2 | 3 | 4**  
configurations: **EE | AV**



p.18

model: **linea pb**  
no. groups: **2 | 3 | 4**  
configurations: **AV | ABR**



p.22

model: **gb5 s**  
no. groups: **2 | 3 | 4**  
configurations: **EE | AV | ABR**



p.28

model: **strada s, strada x**  
no. groups: **1 | 2 | 3**  
configurations: **AV | ABR | X**



p.34

model: **leva s, leva x**  
no. groups: **2 | 3**  
configurations: **LEVER**



p.36

model: **kb90**  
no. groups: **2 | 3**  
configurations: **AV | ABR**

## UNDER-COUNTER



p.40

model: **modbar**  
no. groups: **1 | 2 | 3 | 4 | ∞**  
configurations: **AV | ABR**

## LIGHT COMMERCIAL / HOME



p.42


model: **linea mini**  
no. groups: **1**  
configurations: **EE**



p.43

model: **gs3**  
no. groups: **1**  
configurations: **MP | AV**

## about our nomenclature

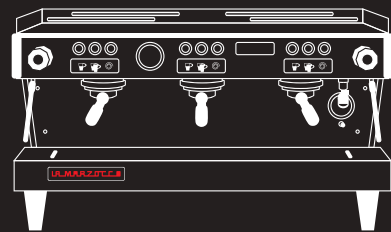

**linea pb** | **3** | **AV**

1                      2    3

- 1: model
- 2: no. groups
- 3: configuration

## configurations

**MP | EP** (manual)  
**EE** (semi-automatic)  
**AV** (auto-volumetric)  
**ABR** (auto with scales)  
**LEVER** (manual)

See page 11 for descriptions of each configuration and its affect on speed, consistency, and control of your espresso shot.





26



WARNING - HOT SURFACE  
ATTENTION - SURFACE CHAUDE

SAFETY INFORMATION  
READ THE USER MANUAL  
BEFORE USING THE MACHINE  
DO NOT TOUCH THE HOT SURFACE  
DURING OR AFTER USE  
DO NOT TOUCH THE HOT SURFACE  
DURING OR AFTER USE  
DO NOT TOUCH THE HOT SURFACE  
DURING OR AFTER USE

# linea classic s

a specialty coffee icon, the workhorse of a high-volume café



---

model: **linea classic s**

no. groups: **1 | 2 | 3 | 4**

configurations: **EE | AV**

---

## LINEA CLASSIC S OVERVIEW

The La Marzocco Linea Classic is the machine that has helped to forge the world of coffee over the past three decades. The clean lines and familiar charm of the Linea Classic occupy many of the cafés, roasteries, and chains whose names have defined the industry.

The Linea Classic S is a reliable, consistent workhorse that can be trusted to be a dependable partner in any coffee program. A tried-and-true machine, the Linea Classic S is perfect for your new café, bar, or restaurant.

## FEATURES

### saturated groups

Ensure unsurpassed thermal stability, shot after shot

### integrated shot timer (AV)

Built-in digital shot timers display extraction time

### ½ turn steam valve


Steam valve fully opens in ½ turn, requiring less movement for the barista to steam

### pro app compatible

Electronic board that provides native connectivity with the La Marzocco Pro App

## LINEA CLASSIC S HIGHLIGHT: dual PID controller

A PID controller employs an algorithm to regulate when and for how long the heating element is engaged in the boiler. Using a PID controller dramatically reduces temperature variability by precisely regulating the energy of the heating elements. With dual PID, both boilers use this system, ensuring a consistent brew temperature and stable steam pressure. The barista can adjust both boiler temperatures to a precise numerical value using the group keypad.

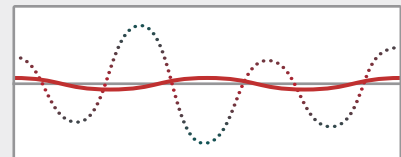

— PID CONTROLLER  
..... MECHANICAL THERMOSTAT

SPECIFICATIONS	1 group	2 group	3 group	4 group
dimensions (W x D x H)	20" x 23" x 20.5"	28" x 23" x 20.5"	37" x 23" x 20.5"	46" x 23" x 20.5"
weight (lbs)	90	130	164	236
voltage (VAC, phase, Hz)	208-240, 1, 60	208-240, 1, 60	208-240, 1, 60	208-240, 1, 60
element wattage	2500	4600	6100	8000
steam boiler capacity (liters)	3.5	7	11	15
brew boiler capacity (liters)	1.8	3.4	5	6.8
amp service required	20	30	50	50
certifications	UL-197, NSF-8, CAN / CSA-C22.2 No. 109			

# linea pb

a comprehensive technical and stylistic  
update to an industry icon



---

model: **linea pb**  
no. groups: **2 | 3 | 4**  
configurations: **AV | ABR**

---

## LINEA PB OVERVIEW

The Linea PB represents the first full update to the Linea Classic since it was released in 1989. The Linea PB features the iconic La Marzocco polished stainless steel body, updated with refined and sharpened design elements and a lower profile.

To complement its stylistic updates, the Linea PB features improved component longevity and new electronics that give the barista control over functions directly from the machine interface – including boiler temperatures, brewing volume, hot water tap dose, and auto-backflush.

### LINEA PB HIGHLIGHT: **la marzocco** user interface

Proprietary electronics drive intuitive programming and provides heads-up information and systems monitoring on a digital display:

- Shot timers
- Flow pulse counter
- USB firmware updates
- Boiler temperatures
- System alerts

## FEATURES

### **dual PIDs (brew and steam)**

Allows you to electronically control brew and steam boiler temperatures

### **piero group caps**

Re-engineered internal water path that increases temperature stability

### **auto backflush**

Simplifying end-of-shift cleaning processes for baristas ensures that machines are cleaned more often and correctly

### **ruby flow restrictors**

Ruby flow restrictors resist scale formation and erosion

### **ECO mode**

Boiler temperatures reduce to lower set-points after extended idle periods, improving energy efficiency

### **auto brew ratio (optional)**

Precision scales incorporated into the electronics system provide the barista control over beverage mass

## SPECIFICATIONS

	2 group	3 group	4 group
<b>dimensions</b> (W x D x H)	28" x 23" x 21"	38" x 23" x 21"	47" x 23" x 21"
<b>weight</b> (lbs)	202	241	306
<b>voltage</b> (VAC, phase, Hz)	208-240, 1, 60	208-240, 1, 60	208-240, 1, 60
<b>element wattage</b>	4600	6100	8000
<b>steam boiler capacity</b> (liters)	7	11	14.5
<b>brew boiler capacity</b> (liters)	3.4	5	6.8
<b>amp service required</b>	30	50	50
<b>certifications</b>	UL-197, NSF-8, CAN / CSA-C22.2 No. 109		



guatemala  
fino el injerto  
bourbon

LA MARZOCCO

HONEY  
QUALITY  
WASHED  
COFFEE

Ha  
P



WHITE 6.00  
CAPPUCCINO 6.75 5.00 5.25  
MOCHA 6.75 4.00 4.25  
CINNAMON 6.75 4.00 4.25  
SMITH 3.00  
SWITCH 3.00

SEASONAL  
JACOBSEN  
SALTED MOCHA  
W/DRANGE COOKIES

ALL DRINKS PRICED AS A DOUBLE

# gb5 s

elegant design married with proven reliability



---

model: **gb5 s**  
no. groups: **2 | 3 | 4**  
configurations: **EE | AV | ABR**

---

## GB5 S OVERVIEW

Equipped with proprietary La Marzocco electronics and advanced temperature stability, the GB5 S combines classical European design with cutting edge performance. The machine has been modernized since its release in 2005 and is an elegant companion to any coffee bar. The red lilies on the sides recall our Florentine heritage, while partially exposed groups offer a streamlined barista working experience. The machine provides control over boiler temperature, brewing volume, automatic cleaning cycles and more to keep high-quality coffee flowing even during the busiest hours.

### GB5 S HIGHLIGHT: classic italian design

The gracious lines and harmonious curves of the GB5 S speak to the La Marzocco heritage of design and intention. The understated side shields, elegant Florentine lilies, and subtle insignia of il marzocco on the cup rail combine to give this machine the feel of an heirloom built to stand the test of time.



## FEATURES

### piero group caps (AV and ABR)

Re-engineered internal water path that increases temperature stability

### dual PIDs (brew and steam)

### auto backflush

### dimnable barista lights (AV and ABR)

3-stage LED lights for eco, on, and brewing modes allow you to focus on your extraction and the cup

### ruby flow restrictors

Ruby flow restrictors resist scale formation and erosion

### easy rebuild steam valve

Engineered so the valve can be serviced directly from the front of the machine without needing to be removed

### pro touch steam wands (optional)

Vacuum-insulated double-walled steam wands remain cool while delivering high-volume dry steam

SPECIFICATIONS	2 group	3 group	4 group
dimensions (W x D x H) * with high legs	29" x 25.2" x 18.5" * 21.4"	38.5" x 25.2" x 18.5" * 21.4"	48" x 25.2" x 18.5" * 21.4"
weight (lbs)	150	171	198
voltage (VAC, phase, Hz)	208-240, 1, 60	208-240, 1, 60	208-240, 1, 60
element wattage	5200	6800	8300
steam boiler capacity (liters)	7	11	15
brew boiler capacity (liters)	3.4	5	3.4 x2
amp service required	30	50	50
certifications	UL-197, NSF-8, CAN / CSA-C22.2 No. 109		





# strada s

a machine developed by baristas for baristas



---

model: **strada s**

no. groups: **2 | 3**

configurations: **AV | ABR**

---

## STRADA S OVERVIEW

Over the course of two years La Marzocco worked with 30 of the world's finest coffee professionals to design a machine. This group was known as the Street Team. The Strada, Italian for "street," was named in their honor.

A lower profile invites customer engagement in a café setting, while also providing the barista an open, expansive work area.

The Strada platform has been designed to encourage creativity and customization so that each machine can be unique. The Strada is available in 2 different configurations to meet the specific needs of baristas and cafes around the world.

## FEATURES

### proportional steam valve

Lever-style activation for proportional solenoid steam valve.

### pro touch steam wands

High performing steam wands that are cool to the touch.

### integrated scales (ABR only)

Precision scales built into the drip tray provide an improved level of consistency.

### insulated boiler

Reduce energy consumption while contributing to temperature stability.

### auto brew ratio / drip prediction

Incorporated scales improve beverage consistency by stopping extraction based on mass, while Drip Prediction uses an algorithm to improve shot accuracy.

SPECIFICATIONS	2 group	3 group
dimensions (W x D x H)	32.7" x 27.2" x 19.7"	40.6" x 27.2" x 19.7"
weight (lbs)	169	206
voltage (VAC, phase, Hz)	220, 1	220, 1
element wattage	4330-5666	5830-7783
steam boiler capacity (liters)	8.2	11.8
brew boiler capacity (liters)	2.6	3.9
amp service required	30	50
certifications	UL-197, NSF-8, CAN / CSA-C22.2 No. 109	

# strada x

a machine developed by baristas for baristas



---

model: **strada x**  
no. groups: **1 | 2 | 3**  
configurations: **X**

---

## STRADA X OVERVIEW

Over the course of two years La Marzocco worked with thirty of the world's finest coffee professionals to design an espresso machine. This group was known as the "Street Team". The Strada, which means Street in Italian, was named in their honor.

The Strada X improves upon the features and modernizes the aesthetics of the original, while combining the most advanced features across the La Marzocco range of products.

### STRADA X HIGHLIGHT: three distinct brewing modes

**Manual Brewing** allows the barista to manually create a pressure profile by moving the paddle between 0 and 12 bars of pressure.

**Profile Brewing** lets the barista select an existing profile to run automatically when the paddle is engaged.

**AV Brewing** allows the barista to set a target weight and run espresso with consistent pressure.

## FEATURES

### mass-based profiling

Integrated scales allow for a new standard in precision and repeatability using beverage mass to control the pressure curve.

### smart saturation

The Smart Saturation feature introduced in the Strada X monitors the flow rate of the water to take guesswork out of preinfusion and ensure ultimate consistency.

### paddle-based profile control

A redesigned paddle ensures that the Strada X automatically tunes your pressure inputs into a profile that won't damage the puck and result in channeling.

### straight-in portafilters

Designed to simplify the motions required to engage the portafilter and reduce strain by 12x on the barista for even greater performance and everyday usability.

SPECIFICATIONS	1 group	2 group	3 group
dimensions (W x D x H)	21" x 27.2" x 19.7"	32.7" x 27.2" x 19.7"	103.6" x 27.2" x 19.7"
weight (lbs)	145	206	222
voltage (VAC, phase, Hz)	220, 1	220, 1	220, 1
element wattage	2037-2220	4800-5666	6730-7783
steam boiler capacity (liters)	3.5	8.2	11.8
brew boiler capacity (liters)	1.3	2.6	3.9
amp service required	10	30	50
certifications	UL-197, NSF-8, CAN / CSA-C22.2 No. 109		





# leva

reimagining what a lever-actuated  
espresso machine can be



---

models: **leva s, leva x**

no. groups: **1(x) | 2 | 3**

configuration: **LEVER**

---

## LEVA OVERVIEW



Featuring eye-catching design and a lower profile to invite customer interaction, Leva re-invents the iconic lever machine design with more ergonomic elements. Leva is a cutting-edge café centerpiece that encourages engagement, barista experimentation, and coffee conversations, while delivering a delicious coffee extraction.

Leva brings with it design, focusing not just on physical beauty, but also on the satisfaction found in a truly mechanical system.

### LEVA HIGHLIGHT: **live pressure visualization (leva x only)**

The Leva is equipped with dedicated graphical displays for each group. The displays provide live visualization of pre-infusion pressure, extraction pressure, and time throughout the course of the shot. After the coffee has been delivered, the extraction curve and parameters are visualized on the displays as a graph. The barista has the ability to overlay past visualizations, saving up to four graphs for each group as guides for future extractions.

## FEATURES



### **independent brew boilers (leva x)**

Separate boilers for each group head allow baristas to optimize temperature for individual coffees

### **smart PID (leva x)**

An advanced PID controller greatly improves the machine's temperature stability

### **pro touch steam wands**

Vacuum-insulated double-walled steam wands remain cool to the touch while delivering high-volume dry steam

### **ECO mode**

Boiler temperatures reduce to lower set-points after extended idle periods, improving energy efficiency

### **military-grade steam potentiometer (leva x)**

Proportional steam valves facilitate machine usability and maintenance while improving its durability

SPECIFICATIONS	1 group (leva X)	2 group	3 group
<b>dimensions</b> (W x D x H)	20.5", 25.5", 30.5"	31.5" x 25.5" x 30.5"	40" x 25.5" x 30.5"
<b>weight</b> (lbs)	150	218	284
<b>voltage</b> (VAC, phase, Hz)	208-240, 1, 60	208-240, 1, 60	208-240, 1, 60
<b>element wattage</b>	2300	5400 (leva s), 5700 (leva x)	6800 (leva s), 7800 (leva x)
<b>steam boiler capacity</b> (liters)	3.5	8.2	11.8
<b>brew boiler capacity</b> (liters)	1.3	3.4 (leva s), 1.3 x2 (leva x)	5 (leva s), 1.3 x3 (leva x)
<b>amp service required</b>	10	30	50
<b>certifications</b>	UL-197, NSF-4, CAN / CSA-C22.2 No. 109		

# kb90

the ultimate workflow machine featuring the  
straight-in portafilter



---

model: **kb90**  
no. groups: **2 | 3**  
configurations: **AV | ABR**

---

## KB90 OVERVIEW

The KB90 is the ultimate evolution of the Linea PB form, designed to optimize workflow for baristas by improving the ergonomics and features of the machine. The Straight-In Portafilter removes strain on baristas that causes repetitive stress injuries.

Efficiency is also increased thanks to Steam Flush: after each extraction, a burst of steam purges the brew path and is followed by a flush of hot water, keeping the group heads clean even during the busiest hours.

### KB90 HIGHLIGHT: straight-in portafilter

Designed to simplify the motions required to engage the portafilter and reduce the strain by 12x on the barista for even greater performance and everyday usability. High-volume coffee environments demand that a barista can work quickly and efficiently to produce drinks during the busiest periods of the day. The Straight-In Portafilter can noticeably mitigate repetitive stress injuries through its ease of action improving the natural workflow and output of the barista.

## FEATURES

### independent brew boilers

Separate boilers for each group head allow baristas to optimize temperature for individual coffees

### steam flush

Keeps the groups clean with an automatic burst of steam and a flush of hot water between extractions

### auto brew ratio / drip prediction

Precision scales incorporated into the drip tray improve beverage consistency by stopping extraction based on mass, while Drip Prediction uses an algorithm to improve shot accuracy

### easy rebuild steam valve

Engineered so the valve can be serviced directly from the front of the machine without needing to be removed

### pro touch steam wands

Vacuum-insulated double-walled steam wands remain cool to the touch while delivering high-volume dry steam

SPECIFICATIONS	2 group	3 group
dimensions (W x D x H)	32" x 24.5" x 21"	41.5" x 24.5" x 21"
weight (lbs)	170	223
voltage (VAC, phase, Hz)	208-240, 1, 60	208-240, 1, 60
element wattage	5400, 5700	7300, 7800
steam boiler capacity (liters)	7	11
brew boiler capacity (liters)	1.3 x2	1.3 x3
amp service required	30	50
certifications	UL-197, NSF-8, CAN / CSA-C22.2 No. 109	





La MARZOCO

# modbar

redesigned for reliability



## espresso system



Make an instant design statement with the Modbar AV. Based on the technology of the Linea PB, Modbar AV delivers absolute consistency and reliability.



## steam system



More than just a steam station, Modbar Steam delivers a minimal, modern aesthetic coupled with power and control.



## pour-over system



Brew-by-hand using one of the two included spray tips, or teach the machine different recipes, accessible at the touch of a button.

---

model: **modbar**

no. groups: **1 | 2 | 3 | 4 | ∞**

configurations: **AV | ABR**

---



## espresso system

### FEATURES

- linea pb volumetrics and optional scales
- multi-position lever with four saved programs
- add-a-tap system for two taps per module
- easy access to water, power, and drain connections
- PID temperature control
- heated brew group

### SPECIFICATIONS

TAP	
dimensions*	5.5" x 12.5" x 14"
weight (lbs)	23
MODULE	
dimensions*	16" x 15" x 8.5"
weight (lbs)	40
capacity (liters)	Dual Boiler: 2.8   Total
ELECTRICAL	
208V - 240V	
amps	14.2
wattage	3264
frequency (Hz)	50 / 60
phase	single
certifications	ETL**, CE



## steam system

### FEATURES

- double-walled performance touch steam wand
- omnidirectional ball fitting
- minimal purge required with no steam valve rebuilds
- linea-style boiler sight glass
- simple on / off switch controlled by solenoid inside module
- right-hand side connections for easy service access

### SPECIFICATIONS

TAP	
dimensions*	3.5" x 12.6" x 13.5"
weight (lbs)	7.7
MODULE	
dimensions*	16" x 14" x 8.6"
weight (lbs)	40
capacity (liters)	Dual Boiler: 4.6   Total
ELECTRICAL	
208V - 240V	
amps	14.2
wattage	3310
frequency (Hz)	50 / 60
phase	single
certifications	ETL**, CE



## pour-over system

### FEATURES

- store pour-over profiles in the module
- automatic and manual brewing modes
- built-in flow control valve
- volumetric and time-based dosing
- holder ring and two spray tips included
- unique "teaching" mode; perform your brew-by-hand and the system memorizes and stores it for you

### SPECIFICATIONS

TAP	
dimensions*	7" x 9" x 17.5"
weight (lbs)	12
MODULE	
dimensions*	16" x 14" x 5.5"
weight (lbs)	35
capacity (liters)	Dual Boiler: 1.2   Total
ELECTRICAL	
208V - 240V	
amps	13
wattage	3000
frequency (Hz)	50 / 60
phase	single
certifications	ETL**, CE

\* width x depth x height

\*\* Listed for electrical safety in US and Canada, complies with UL-197 and CSA22.2; listed for sanitation, complies with NSF /

# linea mini

a la marzocco classic, redesigned  
for the kitchen



## LINEA MINI OVERVIEW



Inspired by an espresso icon, the Linea Mini is a kitchen-sized version of the Linea Classic. Combining powerful commercial features, the Linea Mini delivers an easy-to-use and durable espresso experience in a reduced footprint. The Linea Mini looks as beautiful as it performs, ready to serve for years to come.

model: **linea mini**

no. groups: **1**

configurations: **EE**

## FEATURES

- dual boilers
- integrated group
- indicator lights
- hot water spout
- thermal stability system
- connected app capability
- internal pump
- PID controller
- water reservoir
- barista lights

## SPECIFICATIONS

dimensions*	14" x 21" x 15"
weight (lbs)	71
voltage (VAC)	120
element wattage	1600
capacity (liters)	3.5 (steam boiler)
amp service req.	15
certifications	UL-1082, NSF-8 CAN/CSA-C22.2 No.64

\* width x depth x height

# gs3

professional grade espresso equipment,  
built for the home



## GS3 OVERVIEW

When the owners of La Marzocco set out to create their dream home machine, they challenged their engineering team to fit all of the quality components of a commercial espresso machine into a kitchen-ready one. The result was the GS3 – an espresso machine built for the discerning barista at home. The GS3 boasts nearly a century of espresso machine innovations in a compact, 110V platform.

model: **gs3**  
no. groups: **1**  
configurations: **MP | AV**

## FEATURES

- dual boilers
- saturated group
- digital display
- thermal stability system
- connected app capability
- internal pump
- dual PID (brew & steam)
- water reservoir
- ruby flow restrictors
- half power mode
- periscope pressure gauge (MP)

## SPECIFICATIONS

dimensions*	14" (17.5" MP) x 21" x 16"
weight (lbs)	72.75
voltage (VAC)	120
element wattage	1600
capacity (liters)	3.5 (steam boiler)
amp service req.	15
certifications	UL-1082, NSF-8 CAN/CSA-C22.2 No.64

\* width x depth x height


# grinder considerations

After you have chosen your espresso machine, your next big decision is the grinder. Here we'll discuss three of the key points of difference among grinders to help you make your selection.

## burr shape

Commercial espresso grinders use either conical or flat burrs: grooved metal plates that grind coffee beans into small particles. In general, conical burrs grind coffee faster than flat burrs. Different taste profiles can also be created by conical or flat burrs. It is best to try your coffee with both and choose the one that gives you the preferred mix of taste profile and speed.

### grinder models by grind speed

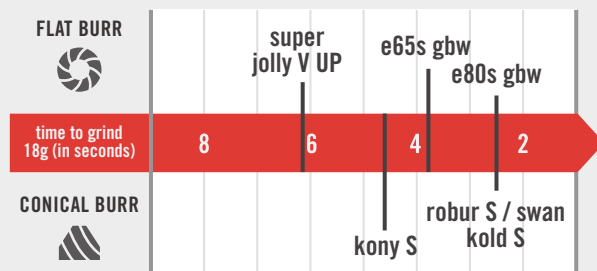

\* auto-tamping grinders not included

## motor placement

Within the body of the grinder, the motor that moves the burrs might be located either directly below the burrs (direct drive) or in the back of the grinder, connected to the burrs by a belt (belt-drive). Motor placement affects heat transmission during the grinding process.



### direct drive

Smaller footprint, but bigger temperature variability. Stepless collar grind adjustment.



### belt drive

Larger footprint, smaller temperature variability. Stepless knob grind adjustment.

## delivery method

### doser

Doser grinders use a chamber to collect coffee grounds, which the barista doses manually into the portafilter. Can be used for on-demand delivery by constantly pulling the paddle during grinding, or for pre-grinding and dosing consistent volumes of coffee in high-volume shops.

### electronic

Electronic grinders dose freshly ground coffee directly into the portafilter either on-demand or based on a programmed grind time.

### grind-by-weight/grind-by-sync

Grind-by-weight and grind-by-sync grinders use a load cell in the portafilter cradle to weight the coffee while it is grinding. These grinders allow the user to program a desired coffee weight by 0.1-gram increments and dose directly into the portafilter.





**SWAN**



**pu3**  
PRESSURE

# swan

innovative grinding technology housed in elegant design

The Swan combines new technology with nearly 100 years of experience in espresso machine innovation, allowing La Marzocco to reimagine the coffee grinder.

## Constant motor speed



With an advanced motor control and monitoring system, the Swan ensures a constant burr speed regardless of resistance from the coffee.



### swan

#### DOSED BY REVOLUTION



The advanced motor monitoring system also allows the user to program each dose based on the number of revolutions made by the burrs. This ensures more accuracy and consistency than timer-based grinders.

## Patented Anti-Static Technology



The Swan's patented anti-static technology uses an electric field to neutralize the static charge generated by grinding. This allows for coffee to fall directly from the burrs into the portafilter without any clumping or stray grounds creating messy countertops.

# auto-steam with wally milk

Wally Milk is an automatic milk steamer designed to simplify the milk steaming process, providing consistent, high-quality steamed milk at the touch of a button. Wally Milk facilitates efficient bar flow, enabling the barista to focus on a more intimate customer experience.

## consistent texture and temperature

Wally Milk monitors milk level and temperature with two sensors, which allow the machine to steam to your milk texture specifications. Place your filled pitcher on the tray, press start, and the proximity sensor next to the steam wand will measure the pitcher size and the level of milk. The infra-red sensor, located at the base of the drip tray, will monitor the steaming temperature (in °F or °C) to match your pre-programmed recipe.



### how it works

An oscillating tray simulates the skilled movement of a barista, which, combined with a unique angled steam tip, creates a consistent vortex while steaming. Wally Milk comes with three milk pitchers (8oz, 14oz, and 24oz) and automatically recognizes which size is being used.

Wally Milk recognizes any 8oz-24oz matte finish pitcher



### simple user interface

Wally Milk can be programmed with up to 20 recipes with specifications for milk temperature and level of aeration, enabling baristas to easily shift between dairy and milk alternatives and different types of beverages.

## barista backup

Think of Wally Milk like an extra set of hands. The steam for Wally Milk is provided by the steam boiler in your espresso machine, hooked up with a technician-installed connection kit. On busy coffee bars, baristas often team-up to pull shots and steam in an assembly-line fashion. With Wally Milk, that team has an automated third member, ideal for steaming large volumes of milk while other drinks are being prepared.



Machine Name: BT  
Menu Item: Espresso  
Price: \$2.50  
Quantity: 1  
Total: \$2.50  
Large Latte

You can learn the techniques, but passion is  
born of dedication, love, pride and respect.





La Marzocco

MM  
MM

MM  
Press



putting it all together

## workflow planning

After identifying your goals, it's helpful to plan out your complete equipment workflow. This consists of your machine, grinder, and tamping station. By optimizing your equipment set and tool placement, you can provide a fast and friendly customer experience while providing a safe working environment for your staff.



# customization

Your espresso machine should be unique as your business. La Marzocco offers beautifully designed equipment with a wide range of customization options.

## COLOR:

### **RAL powdercoating**



La Marzocco USA offers a wide range of colors to create your unique machine, and will install customized panels during the bench test procedure.

Custom color starts at P10,000.00



## FINISHING TOUCHES:

### **espresso. elevated to art.**



Handmade exclusively for you by our team of highly skilled craftspeople and designers.

A workshop dedicated to crafts and artistry, Officine Fratelli Bambi offers artisanal and bespoke espresso machines .

Contact your sales representative to create your dream espresso machine.





## INNOVATIVE KITCHEN SOLUTIONS



3rd Floor, AM Group Building, 403 EDSA corner Quingua,  
Brgy. Pinagkaisahan, Makati City 1213, Metro Manila, Philippines

marketing@amgroup.asia  
Tel. +63 02 7752 3091 | Cel. +63 966 089 0298

[www.amgroup.asia](http://www.amgroup.asia)