



OVERVIEW

Proudly the Smallest and Lightest LRF System in its Class. The Miniature Advanced Rangefinder System Midrange (MARS-M) brings a precision weapon-mounted laser rangefinding capability to the user in an exceptionally small form factor. With an integrated Applied Ballistics solver, visible pointer, and Bluetooth interface to external peripherals such as the Kestrel weather meter, the MARS-M delivers >700m range performance in an affordable package weighing less than 8 oz.

USER BENEFITS

- Ultra-compact with full-power capability:** Weighs under 8 oz and ranges targets >700m with a 905nm laser.
- Built-in Applied Ballistics® solver:** Calculates real-time windage and elevation using gun profiles and environmental data.
- Included Environmental Sensors:** Temperature and pressure to eliminate guesswork and increases long-range lethality.
- Speed, Precision, and Scan modes:** Adapt to fast movers, long shots, or target discrimination.
- First / Last / Best return logic:** Confirms target in cluttered environments like brush or glass.
- Haptic feedback:** Vibration confirms ranging without needing to look away.
- Integrated Bluetooth:** Interfaces to external devices such as the Kestrel Weather Meter and/or external displays
- Display:** Auto-rotating display stays level mounted at 12, 3, 6, or 9 o'clock and adjustable LED brightness for day or night operation.
- Glove-friendly 3-button interface:** Simple, intuitive control under pressure.
- Remote switch compatible:** Comes with 12" and 20" cable options.
- Built for combat:** Waterproof up to 1meter, recoil-rated, and reliable from 4°F (-20°C) to + 140°F (60°C).
- Mounting:** MIL-STD-1913 rail interface to mount to a wide variety of weapon platforms
- Units of Measure:** Imperial, Metric, or Mixed units
- Single CR123A powered:** >2,000 range activations per battery.

MARS-M FEATURES

LRF	905nm, Class 1M >700m on 30% reflective man-size target >1,000m on 30% reflective NATO target
Weight	With Battery: <8oz (227g) Without Battery: 6.4oz (183)
Dimensions	L: 3.9" (99mm) W: 2.6" (66mm) H: 1.5" (38mm) above rail
Power	Single CR123A Battery
Mounting Interface	MIL-STD-1913 Rail Grabber
Wireless Interface	2 Way Bluetooth
Ballistic Computer	Applied Ballistics, Integrated
LRF Modes	Speed, Precision, Scan (rapid)
User Interfaces	Three-button remote, rotary switch
Visible Pointer	
Output Power	3.5mW (low) Class 3R 38mW (high) Class 3B, +/- 20%
Divergence	0.5mR (+/- 0.3mR)
Wavelength	~640nm (at 20C°)



Available Accessories & Spares
MARS Fix It Stick
3-Button Remote, 12" / 20"
Mode Select Switch Assembly and Bezel, Spare
Lens Cover Assembly, Spare
Battery Cap Assembly, O-Ring & Strap, Spare
Soft Case, Spare
Mode Select Switch Assembly and Bezel, VIS Only, Spare



LRF Transmit Window


LRF Receiver Window

Aiming / Illumination Laser Window

Azimuth Adjuster

Rail Grabber

Input/Output Connector (Wired Remote Interface)

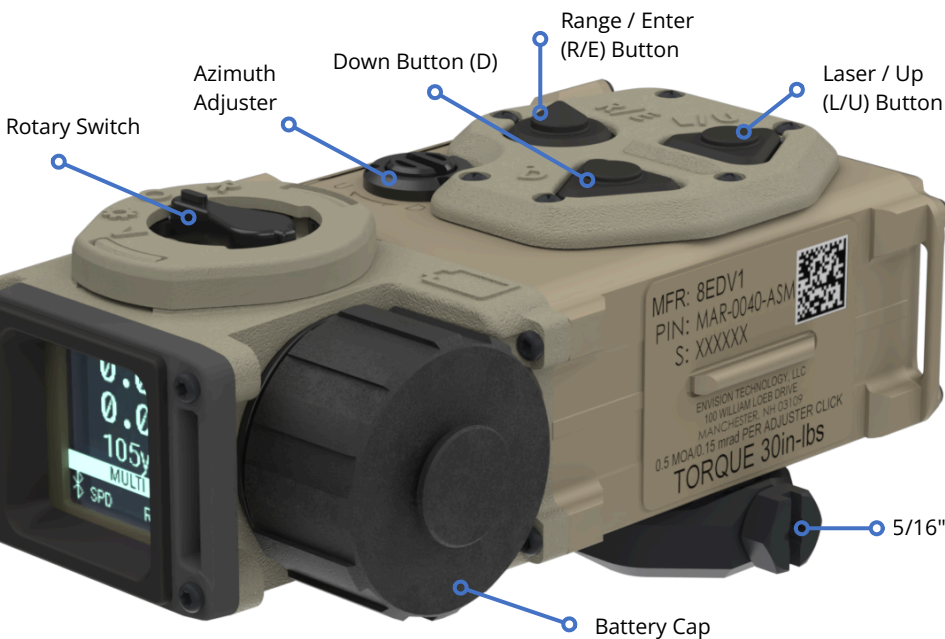

Ambient Light Sensor

LED

Rotary Switch

Azimuth Adjuster

Down Button (D)

Range / Enter (R/E) Button

Laser / Up (L/U) Button

Battery Cap

5/16" Rail Clamp

