

The AZ-EZ2N controller features a state-of-the-art microprocessor for reliable control of two (2) zones from a single forced-air HVAC system. The panel includes a bright, backlit LCD display with full text for system status monitoring and diagnosis. In addition, each thermostat and equipment terminal has its own color-coded LED allowing for easy monitoring of thermostat and equipment calls. The included supply air temperature sensor allows for constant monitoring of supply air temperature in the plenum. AZ's exclusive Electronic Limit Control™ (ELC) technology protects the system's compressor and heat exchanger from potential issues associated with freeze-up and over heating. Intelligent Smart-Staging™ handles equipment staging based on me and temperature, allowing the use of single-stage thermostats. Exclusive Economy Mode provides comfort and efficiency control. Supports up to 3-Stage Heating and 2-Stage Cooling equipment.

- Economy 2-Zone Controller
- Electronic Limit Control
- Intelligent Smart Staging
- Bright, Backlit LCD Display
- Dependable Field Proven Platform

# ·

### **AZ-EZ2N**

#### **ZONE CONTROLLER**



#### Supply Air Sensor Included

- Plastic Enclosure and Spare Fuse Included
- AZ's Exclusive Start-up Equipment Test Mode
- LED Indicates Blown Fuse

#### **EZ INSTALLATION**

- Mounts with Two Screws
- Quick-Connect Screwless Terminals
- Innovating Enclosure Design with Multiple Wiring and Mounting Options

#### **EZ CONFIGURATION**

- · Display Indicates Full System Status
- Color-Coded LED Indicators for Each Thermostat
- · Call & Equipment Call
- Two-Color LED Indicators Show Damper Position
- Red LED Indicates Blown Fuse

#### **EZ TROUBLESHOOTING**

- Display Indicates Full System Status
- Color-Coded LED Indicators for Each Thermostat Call & Equipment Call
- Two-Color LED Indicators show Damper Position
- Red LED Indicates Blown Fuse

#### **EZ CUSTOMER FEATURES**

- Customer Never Needs to Use the Control Panel
- Selectable Zone-1 Priority for More Customer Control
- Enable Emergency Heat from Zone 1 Thermostat
- Constant Supply Air Monitoring from ELC™ Ensures Customer Safety
- Zone Specific Ventilation Energize Fan from Any Thermostat

#### **EZ OPERATION**

- Mix & Match Standard Gas/Electric and Heat Pump Thermostats
- Intelligent Staging™ Based on Supply Air Temperature
- Automatic Changeover for Maximum Comfort
- Microprocessor Manages All Complex Decisions
- Adjustable Staging Time and Temperature for Maximum Comfort








## **AZ-EZ2N**

#### **ZONE CONTROLLER**

	EZ2N	8VA Max (24VAC @ 300mA)  Separate transformer design for controller, thermostats and dampers (Field Suppli	ed)	
POWER	System Power Requirements	Separate RC & RH terminals for separate equipment transformers, if needed 8VA + Thermostats (3VA) + Dampers (3 to 10VA) = Total Transformer Size	,	
	Protection	Integrated 5x20mm 300ma Slo-Blo Fuse - One replacement also included		
		10 AMP @ 24VAC Contact Rating		
OUTPUTS		RH - 24VAC HOT from Heating Transformer on Equipment (RED Led)		
		RC - 24VAC HOT from Cooling Transformer on Equipment (RED Led)		
	Equipment	C - 24VAC COMMON from Transformer on Equipment (NO Led)	10.625"	
		Y1 - 1st Stage Compressor (YELLOW Led)		
		Y2 - 2nd Stage Compressor (YELLOW Led)		
		<b>G</b> - Fan (GREEN Led)		
		W1/EH - 1st Stage Heat OR Emergency Heat (RED Led)		
		W2 O/B - Reversing Valve OR 2nd Stage Heat (ORANGE Led)		
OUTPUTS		10 AMP @ 24VAC Contact Rating	<del>_</del>	Ų.
		Power Close/Spring Open Dampers (10VA)		
	Dampers	Power Open/Power Close Dampers (3VA)		0
INPUTS		LABEL - DESCRIPTION (LED COLOR)		
		R - 24VAC HOT (RED)		<del></del>
		C - Common (NONE)		5.68
		Y - Compressor (YELLOW)		
	Thermostat	G - Fan (GREEN)		
		W - Heart OR Emergency Heat (RED)		
		O/B - Reversing Valve (ORANGE)		
		<b>EC</b> - Economy Input (GREEN) $\leftarrow$ Zone ONE Only		
INPUTS		10K Type II Thermistor	_	
	Temperature	SA Sensor - 4" Supply Air Temperature Sensor - Stainless Steel Probe w/10ft.		
		Cable and Plug (Provided with each SmartZone Controller)		
\$		SPECIAL FEATURES	_	10.625"
	Equipment	A/C - Gas Heat		10.025
	Capabilities	A/C - Electric Heat		
		Electric Heat Pump - Electric Auxiliary Heat		
		3 Heat/2 Cool		
	Controller	Intelligent Staging		
RES	Capabilities	Zone 1 Thermostat Staging Capable		
7		Electronic Limit Control		
FEATU		Adjustable High and Low Limit Set points		
		Adjustable Time and Temperature Aux Heat Staging		
		Works with Most 5-Wire Thermostats with Common Terminal		
		On-Board Supply Air Temperature Monitoring		
		Back-lit LCD Display		
		LED Indicators for Thermostat and Equipment Calls		5.6875
		Exclusive Technician Run-Test Mode		. ———
		5-Year Warranty		
		LED Indicator for Blown Fuse	1.625"	

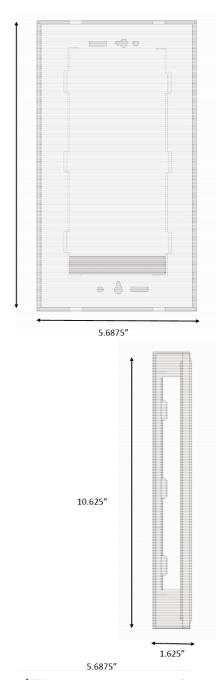

ALL RIGHTS RESERVED TO D-VAC SALES INC. 200B VERDI STREET, FARMINGDALE NY 11735 <u>SALES@DVACHVAC.COM</u> 516-256-3131

