

POM[®]-5B

PRECISE OXYGEN MONITOR

US & FOREIGN PATENTS ISSUED & PENDING



ULTRA HIGH PURITY WELDING APPLICATIONS

Precise Monitoring of Residual Oxygen
Down to .0005% (5PPM)

- Designed for ultra-high purity stainless steel and other high alloy metal applications
- Zirconium Sensor has excellent response time
- High accuracy +/- .0002%
- Long Battery Life: 8-10 hours
- One Year Warranty on Unit & Sensor
- Long Life: Expected sensor life is > 3 years


BREAKTHROUGH TECHNOLOGY

The First APP Enabled Programmable Oxygen Monitor



POM[®]Connect
AVAILABLE ON   

Access Data in Real-Time

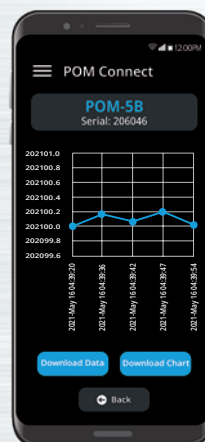

Monitor Features



Kit Contents

- POM®-5B with Built-in Sensor
- Polycarbonate Carrying Case
- Polyurethane Extension Tubing (5' or 1.5m) with Quick Connect and Stainless Steel Probe (6" or 15cm)
- Power Supply/Charger (US or Euro)
- USB Printer Cable
- Phillips Head Screwdriver



Intelligent Color Notification System

POM[®]-5B has an Intelligent Color Notification System for a quick visual check on current oxygen levels. This visual Notification System is designed with universally recognizable colors (red, yellow, and green) that appear on the device, as well as connected phone, laptop or tablet.

“Alarm Limits” can be customized to the operator preferences.




RED indicates that the current measurement is greater than the “Upper Alarm Limit.”

YELLOW indicates that the current measurement is between the “Upper Alarm Limit” & “Lower Alarm Limit.”

GREEN indicates that the current measurement is lower than the “Lower Alarm Limit.”

Bluetooth Transmitting Capabilities

The POM[®]-5B accurately measures low concentrations of oxygen in purged tubing and high purity welds, ensuring a high-quality finish. With Bluetooth transmitting capabilities, this device allows the oxygen monitor to send the oxygen readings wirelessly to a BLE-capable device with Android/iOS/Windows operating system, allowing the operator to monitor real-time readings from remote locations, permitting the ability to access the data interface while standing up to 100 feet (30 meters) away.

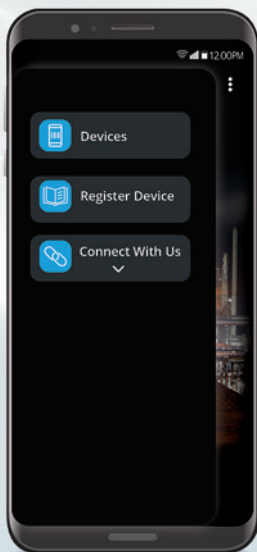

POM[®]Connect

AVAILABLE ON



POM Registration

It is important to Register the POM[®]-100B/POM[®]-5B to start warranty services. It's quick and the link is conveniently located in the menu options of the POM device or the POM Connect App.

Additionally, visit www.aquasolwelding.com/pom-registration

Specifications

POM®-5B

SPECIFICATIONS	RANGE
Measurement Range	.0005 - 20.9%
Display Resolution:	0.0005% to 20.9%
Accuracy:	± 0.002% F.S.*
Typical Response Time:	Approximately 60 seconds
Sensor Life:	3+ years
Operating /Storage Temperature:	-4°F to 140°F (-20°C to 60°C)
Humidity:	0-95% non-condensing
Pump Sampling Rate:	0.4 - 0.7 LPM (400 - 700 cc/min)
Maximum Input Pressure:	20 PSI
Operating Time:	8 - 10 hours
Battery Charge Time:	< 3 hours
Bluetooth Range:	Approximately 100 ft/30m
Weight:	18.4 oz (522 g)
Dimensions:	8.05" x 3.4" x 1.72" (20.45cm x 8.64cm x 4.37cm)

*Best Accuracy

POM®-100B/POM®-5B KIT TYPES AND SIZES

ITEM NO.	DESCRIPTION	DIMENSIONS		WEIGHT	
		ENGLISH (in)	METRIC (cm)	ENGLISH (lb)	METRIC (kg)
POM 100B Kit	POM-100B Oxygen Monitor & Accessories Kit with US Charger	15 x 11 x 5	38 x 28 x 13	6.00	2.72
POM 100B KIT Euro	POM-100B Oxygen Monitor & Accessories Kit with European Charger	15 x 11 x 5	38 x 28 x 13	6.00	2.72
POM 5B Kit	POM-5B Oxygen Monitor & Accessories Kit with US Charger	15 x 11 x 5	38 x 28 x 13	6.00	2.72
POM 5B KIT Euro	POM-5B Oxygen Monitor & Accessories Kit with European Charger	15 x 11 x 5	38 x 28 x 13	6.00	2.72
POM Charger/US	POM-100B/POM-5B US Power Supply/Charger	8 x 4 x 4	20 x 10 x 10	0.40	0.18
POM Charger/EU	POM-100B/POM-5B European Power Supply/Charger	8 x 4 x 4	20 x 10 x 10	0.40	0.18
POM-Tube Assembly	POM-100B/POM-5B Polyurethane Extension Tubing (5' or 1.5m) with Quick Connect & Stainless Steel Probe (6" or 15cm)	8 x 4 x 9	20 x 20 x 23	0.65	0.30

For additional product information, quotations and ordering, please contact:

Distributed By:



Aquasol Corporation

80 Thompson Street
N. Tonawanda, NY 14120 USA

Toll Free: 1.800.564.WELD (9353)
Phone: 716.564.8888
Fax: 716.564.8889

Email: info@aquasolcorporation.com
aquasolwelding.com



American Welding Society
Sustaining Company Member



MADE IN THE USA