
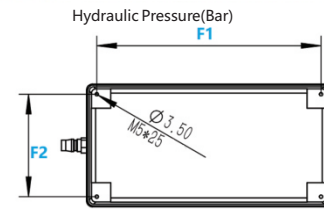
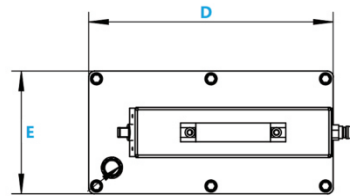
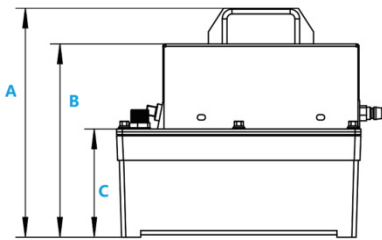


AFP-R SERIES• AIR FOOT PUMP

- Wire/wireless remote controlling pump, which can be suitable for different working situations.
- The pump is smart and portable with small size and light package, which is widely used for single-acting cylinders.
- High quality seals and reasonable structure supply a strong force & excellent pressure-holding performance.
- Every part of the pump is processed fine and durable.
- With easy-economical repair unit, the pump can be used for long time with these recycle parts.

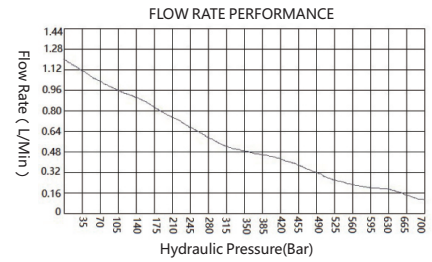

Model	Reservoir Type	Reservoir				Remote Type	Remote Wire length		Air Supply Required		Flow Rate				Oil port	Weight	
		Capacity		Usable			m	inch	bar	psi	@0 PSI		@10,000 PSI			kg	lbs
		L	(inch ³)	L	(inch ³)						L/min	(inch ³ /min)	L/min	(inch ³ /min)			
AFP-1R	Polyethylene reservoir	1.7	103.74	1.6	97.64	wire	2.5	98.4	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	6.6	14.6
AFP-2R	Aluminum reservoir	1.7	103.74	1.6	97.64	wire	2.5	98.4	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	7.6	16.8
AFP-3R	Polyethylene reservoir	2.3	140.35	2.1	128.15	wire	2.5	98.4	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	7.4	16.3
AFP-4R	Steel reservoir	3.8	231.89	3.5	213.58	wire	2.5	98.4	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	10.6	23.4
AFP-5R	Steel reservoir	5.0	305.12	4.6	280.71	wire	2.5	98.4	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	12.6	27.8
AFP-3RW	Polyethylene reservoir	2.3	140.35	2.1	128.15	wireless	/	/	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	7.5	16.5
AFP-4RW	Steel reservoir	3.8	231.89	3.5	213.58	wireless	/	/	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	10.7	23.6
AFP-5RW	Steel reservoir	5.0	305.12	4.6	280.71	wireless	/	/	3-8	44-116	1.22	74.45	0.095	5.80	3/8 NPT	12.7	28.0

Model	A		B		C		D		E		F1*F2	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
AFP-1R	237	9.33	200	7.87	113	4.45	255	10.04	128	5.04	233*105	9.17*4.13
AFP-2R	237	9.33	200	7.87	113	4.45	263	10.35	136	5.35	234*107	9.21*4.21
AFP-3R	230	9.06	193	7.60	115	4.53	315	12.40	175	6.89	220*102	8.66*4.02
AFP-3RW	241	9.49	203	7.99	115	4.53	315	12.40	175	6.89	220*102	8.66*4.02
AFP-4R	217	8.54	180	7.09	110	4.33	330	12.99	190	7.48	/	/
AFP-5R	217	8.54	180	7.09	110	4.33	372	14.65	231	9.09	/	/
AFP-4RW	228	8.98	190	7.48	110	4.33	330	12.99	190	7.48	/	/
AFP-5RW	228	8.98	190	7.48	110	4.33	372	14.65	231	9.09	/	/