

Make it E.

1-877-433-5733 www.ezspotur.com



# BARREL HANDLER EZ-0002



Shown on a Chain Rotating Base EZ-001C





## SAFETY FEATURES





#### **Rotation Safety**


\*Shown on a Chain Rotating Base EZ-001C

The rotation cycle has a mechanical stop to prevent the hydraulic cylinders from exceeding their maximum extension, which would cause the Attachment to rotate too far and damage it.



BARREL HANDLER w/ Double Cylinder Rotating Base (EZ-001D)

BARREL HANDLER w/ Fixed Base (EZ-001F)

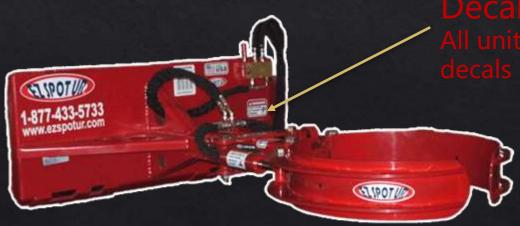


#### HOSE SAFETY

- All hydraulic hoses are <u>Cordura</u> protected
- Hoses have an operating pressure of 3,000psi
- Burst pressure of 12,000psi
- The spring hose unit prevents the line from getting pinched
- Spring hose unit keeps lines out of the dirt.

#### SPRING HOSE MOUNT



### CONNECTION SAFETY

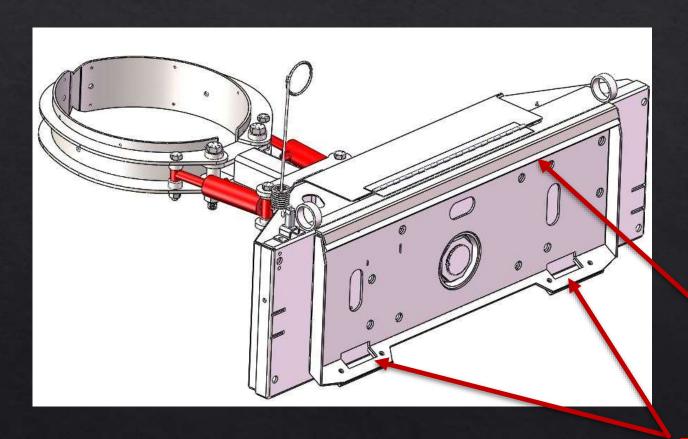


Quick attach plate has gusset on top for extra support.

Quick attach plate has doublers at the pin holes to insure they will not tear out.

Gusset


Doublers

### Clamp Specifications

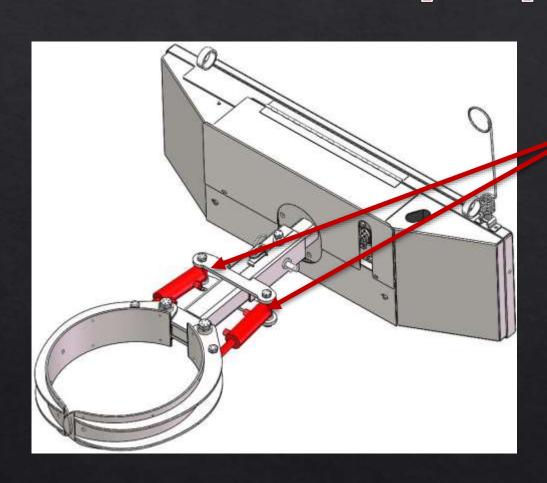

- 2"x3.5" CLAMP CYLINDERS
- Break out force of 9,425 lbs

#### CHAIN BASE SPECIFICATIONS

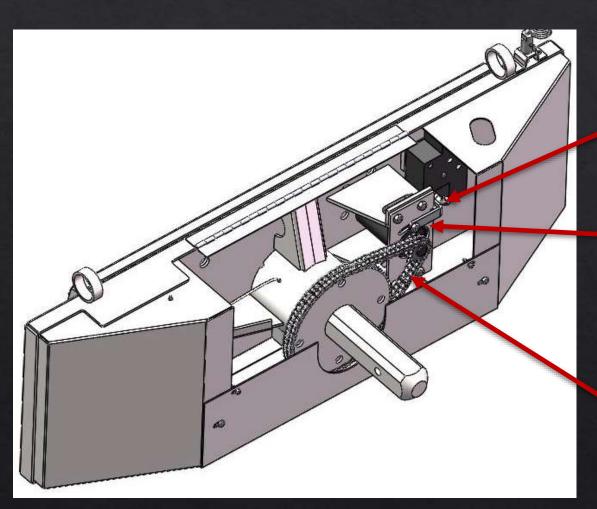

Chain Tensioner Bolt

Motor


Torque: 2059 lb-ir

• Displacement: 9.7 in<sup>3</sup>/r


Double 40 Chain


#### SHAFT SAFETY

- The main rotating shaft is made of solid 3 ½ inch 4140 OQT
- Front of shaft is milled down to 3 inch square and slides into the receiver of the toolhead.
- The sprocket is 5 ¾" for the double 40 chain.

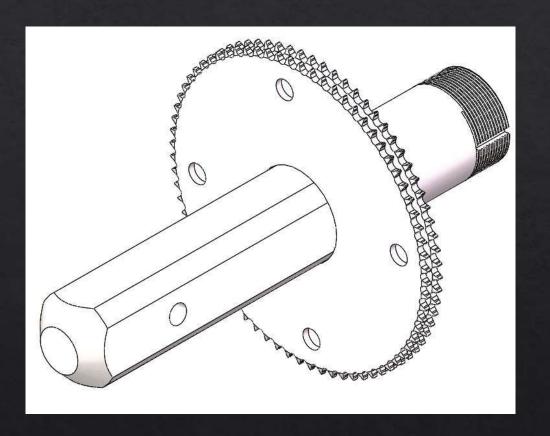

#### Dimensions of Barrel Handler

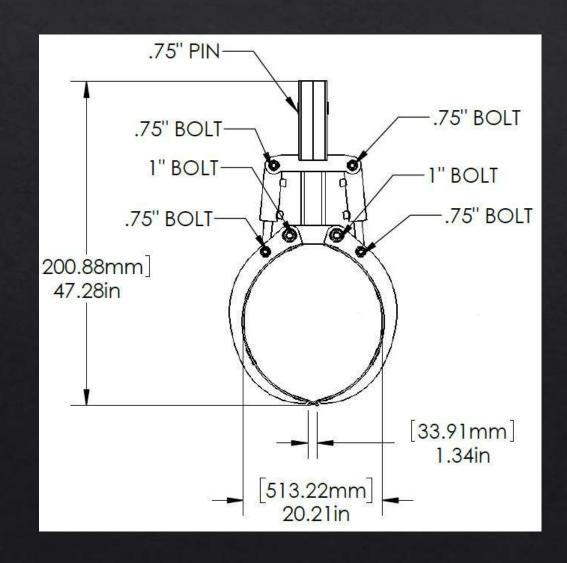

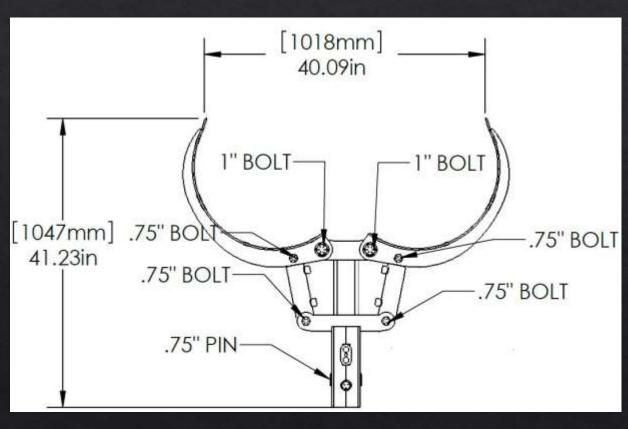

# EZSPOTUR Make it EZ!



LOAD AND UNLOAD
BARRELS



SAFELY DUMP BARRELS
WITH ONE MAN OPERATION





# MAKES CLEAN UP SAFE AND EZI







### Product Specifications



- Universal Quick Tach' mounting system.
- Can be adapted to fit any machine
- Attachment weight 543 lbs with Rotating Chain Base
- Rated weight capacity: 1200 lbs
- Rotates 300° when attached to the Chain Rotating Base.
- Rotates 110° with the Double Cylinder Rotating Base
- Can be attached to EZ Spot UR Fixed Non-Rotating Base.

### Product Specifications

- Rubber lining reduces slippage and the risk of shock.
- Guaranteed not to crush metal or plastic barrels.
- Comes with ¾" flush faced couplers
- Includes spring hose mount
- Includes wiring harness.
- Core Welded
- Composed of Grade 50 material or higher







#### BARREL HANDLER SHOE AVAILABLE



# 15 GALLON INSERTS AVAILABLE

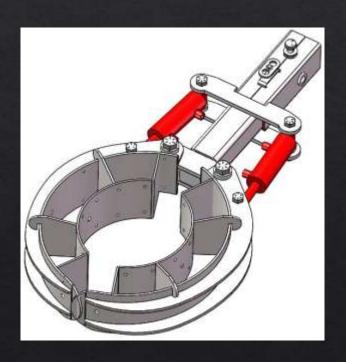

# 30 GALLON INSERTS AVAILABLE

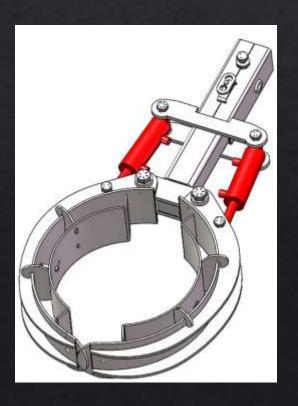

#### Barrel Handler Video



