

VN-IS128CH8HDD

Intelligent Fusion Server



Launched by Viruni Technology, Intelligent Fusion Server is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, Intelligent Fusion Server provides precise, reliable and comprehensive AI solutions for verticals.

Series Overview

Viruni IVSS goes beyond the ordinary NVR products. It is an Intelligent Video Surveillance Server that combines video management features with traditional video storage functions in one device. Besides the basic functions as a network video recorder, IVSS is integrated with features such as face detection and face recognition for different business and industrial applications.

With the build-in deep learning module, IVSS series products adopt video image metadata technology based on deep learning algorithms, offering high-precision human face recognition and perimeter protection. By applying deep learning artificial intelligence, IVSS allows users to focus on what matters most, to improve event response time and help make video actionable.

An all new UI design supports device operation and maintenance management, improving the value and experience of surveillance view, and serving the era of security big data.

Functions


Face Recognition

Supports recording faces by metadata and real-time crosscheck with incredible accuracy to figure out the face with target features. With the Regular and Stranger face mode, IVSS triggers various kinds of alarm actions for different applications.

AI IVS

With deep learning algorithm, AI IVS technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion, parking detection, loitering detection and crowd gathering estimation) are largely reduced.

- Industry embedded micro-controller
- Max 400 Mbps incoming bandwidth
- 128-channel IP video access
- Up to 24-channel AI IVS
- Up to 24-channel face recognition with normal IPC
- Up to 80-channel face recognition with face detection IPC
- Up to 24-channel video metadata
- Up to 50 face databases with 500,000 face pictures in total
- Supports RAID 0/1/5/6/10/50/60
- 4 HDMI/1 VGA video output

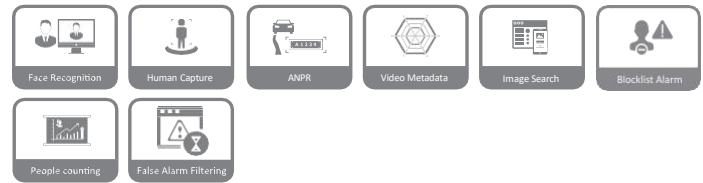

Video Metadata

Metadata is feature attribute information extracted from a target object which can be used for data retrieval. Currently, there are four main kinds of metadata in the security industry: Human face, human body, and motor vehicle and non-motor vehicle metadata.

AI Search

Supports search by metadata of human and vehicles. Supports uploading face pictures to IVSS and compare them with recorded faces in IVSS by similarity. IVSS enables operators to quickly and easily search through multiple channels and long duration, to efficiently find out when and where a person of interest appeared.

ANPR

Automatic Number Plate Recognition available for convenient entrance/exit management. This feature provides number plate recognition (working with Viruni ITC camera), number plate comparison with blacklist/allowlist, vehicle database management, and vehicle record search.

N+M Hot Standby

The highly reliable redundancy N+M Hot Standby design provides a secure failover technique to ensure immediate backup. In the event of a system failure, the sub device instantly takes over the main device to ensure no data loss.

Smart Tracking

The automatic tracking PTZ feature automatically tracks a moving target throughout the camera's field of view. This function is ideal for following an object as it moves through airports, parking lots, city centers, or other scenes.

Technical Specification

System

Main Processor	Industry embedded micro-controller
Operating System	Embedded Linux OS
Operation Interface	WEB (PCAPP), local GUI

AI Applications

AI by Camera	Face detection, face recognition, video metadata, IVS (tripwire, intrusion, abandoned object, missing object, fast moving, parking detection, crowd gathering, loitering, parking, and fence-crossing), people counting, smoking detection, call detection
AI by Device	face detection, face recognition, video metadata, IVS (tripwire, intrusion, crowd gathering, loitering detection, parking detection), plate comparison

IVS

IVS Performance (AI by Device) (Channel Number)	24-channel 2 MP or 16-channel 4 MP with normal IP camera
IVS Performance (AI by Camera) (Channel Number)	64-channel

Human Face Detection

Human Face Properties	Supports 6 properties: Gender, age, glasses, expression, mouth mask, and beard
Face Detection Performance (AI by Device) (Channel Number)	24-channel 2 MP or 16-channel 4 MP with normal IP camera
Face Detection Performance (AI by camera) (Channel Number)	80-channel

Human Face Recognition

Face Database Capacity	50 face databases with 500,000 face pictures in total
Human Face Recognition Performance (AI by Device)(Channel Number)	24-channel 2 MP or 16-channel 4 MP with normal IP camera 80-channel with face detection IP camera (Totally 80 face pictures analyzed per second)
Human Face Recognition Performance (AI by camera) (Channel Number)	80-channel

ANPR

Plate Database Capacity	50 plate databases with 500,000 plate numbers in total Supports allowlist and blacklist
Plate Detection Performance by ITC Camera (Channel Number)	32-channel

Video Metadata

Human Body Properties	ender, age, sleeves length, top color, bottom type, bottom color, bag, rain coat, umbrella, hat, hairstyle, direction, hold a baby, mouth mask
Vehicle Properties	Vehicle type, vehicle color, plate color, logo, calling, seatbelt, ornament, region
Non-motorized Vehicle Properties	Non-motor vehicle type, non-motor vehicle color, number of passengers, umbrella, rain coat, bag , sleeve length, top color, hat, hair style, mouth mask
Metadata Performance (AI by Device)(Channel Number)	24-channel 2 MP or 16-channel 4 MP with normal IP camera

Metadata Performance (AI by camera) (Channel Number)	32-channel
--	------------

Video Parameters

Remote Connection	128-channel
Network Bandwidth	Incoming bandwidth: 400 Mbps recording bandwidth: 320 Mbps outgoing bandwidth: 96 Mbps
Resolution	32MP/24MP/16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/CIF/QCIF
Decoding Capability	1-channel 32MP/1-channel 24MP/2-channel 16MP/5-channel 12MP (20 fps)/6-channel 12MP (15 fps)/5-channel 8MP (30 fps)/10-channel 8MP (15 fps)/6-channel 6MP(30 fps)/8-channel 5MP(30 fps)/9-channel 5MP (25 fps)/10-channel 4MP (30 fps)/15-channel 4MP (20 fps)/16-channel 3MP (25 fps)/10-channel 1080p (60 fps)/20-channel 1080p (30 fps)/30-channel 720p (30 fps)
Video Output	1-channel VGA output, 4-channel HDMI output, VGA 1/ HDMI 1 outputs the same video source. Supports 4K output
Multi-screen Display	1st Screen: Max.64-channel 2nd Screen: Max.16-channel 3rd Screen: Max.1-channel 4th Screen: Max.1-channel
Third-party Support	Onvif; RTSP; Sony; Panasonic; Axis; Arecont; Pelco; Canon; Samsung
Operating System	Embedded Linux OS
Operation Interface	WEB (PCAPP), local GUI

Compression

Video Compression	Smart H.265+; Smart H.264+; H.265; H.264
Audio Compression	G.711a; G.711u; PCM; G.726

Network

Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; P2P; iSCSI; UPnP; SNMP; IPv6
Mobile Phone	DMSS
Interoperability	ONVIF (Profile S, T and G); CGI; SDK
Browser	Chrome; PCAPP; IE9 or higher; Firefox
Network Mode	NIC binding mode such as multiple-address mode, load balance, fault-tolerance, etc

Record Playback

Multiple-channel Playback	Max. 16-channel playback
Record Search	Search video detection/manual record/IO alarm/intelligent event/all record file
Storage Medium	Internal HDD
Backup Method	HDD, peripheral USB storage device
Playback Function	Play, pause, stop, fast forward, fast backward, reverse play, frame by frame play Full-screen, backup (clip/file), snapshot, digital zoom, audio on/off

Storage

HDD Group	8
RAID	RAID 0/1/5/6/10/50/60
Storage Pool	N/A

Alarm

General Alarm	Motion detect, tampering, local alarm
Anomaly Alarm	IPC offline alarm, storage error, HDD full, IP conflict, MAC conflict, login lock, AI module temperature alarm, AI module offline, fan malfunction
Intelligent Alarm	Human face detection, human face recognition, entries frequency, video metadata (person/vehicle/non-motor vehicle), IVS, plate recognition, people counting, smoking, call
Alarm Linkage	Record, snapshot (full image), local external alarm output, IPC external alarm output, access & control, audio prompt, buzzer, log, preset, email

Peripheral Interface

Audio Input	1-channel, RCA port (reserved)
Audio Output	2-channel, RCA port, speaker output, audio linkage output
Alarm Input	16-channel
Alarm Output	8-channel
Internal HDD	8 slots, SATA3.0. Max. 16T/HDD
eSATA	1 port
SAS	N/A
RS-232	1 port, for debug or transparent COM data
RS-485	1 port, control peripheral PTZ and so on Supports various protocols
USB	4 ports 2 USB2.0 ports at the front panel and 2 USB3.0 ports at the rear panel
HDMI	4 ports; support 4K output
VGA	1 ports
Network	4 RJ-45 10/100/1000 Mbps self-adaptive Ethernet ports
Power	1 port
PoE	N/A

General Parameters

Power Supply	100V AC-240V AC 50-60Hz
Power Consumption	38W (without HDD, idling) 105W (all HDDs connected)
Net Weight	7.66 kg (16.89 lb)
Gross Weight	10.24 kg (22.58 lb)
Dimensions (W x L x H)	Chassis: 439.7 mm x 446.2 mm x 89.0 mm (17.31 " x 17.57 " x 3.50 ") Max. size: 481.7 mm (with hanger) x 446.2 mm x 90.8 mm (with feet mat) (18.96 " x 17.57 " x 3.57 ")
Packaging Dimensions (W x L x H)	With Packaging: 562 mm x 599 mm x 235 mm (22.13 " x 23.58 " x 9.25 ") Protection box: 491 mm x 584 mm x 631 mm (19.33 " x 22.99 " x 24.84 ")
Operating Conditions	0 °C to +45 °C (+32 °F to +113 °F)/10%RH-90% RH
Storage Conditions	-20 °C to +70 °C (-4 °F to +158 °F)
Operating Altitude	5000 m (16404.20 ft)

Installation Mode

Desktop/rack

Dimensions (mm[inch])

