

LED Integrated Fixtures



Features & Basic Specs

Features:

- Light Guider Connector For Seamless Linking
- Suitable For Enclosed Fixtures
- High Efficacy LED Chips
- Slim Design With Durable Housing
- Easy Mounting Clip Design

Applications:

- Hospitals
- Schools
- Offices
- Indoor Task Lighting

Essential Specs:

- Set Wattages: 18"/10W - 4FT/22W - 8FT/60W
- CCT: 5000K
- Input Voltage: 120-277VAC
- Lumen Output: 18" - 180lm/W
4Ft & 8FT - 150lm/W
- Dimming: Non-Dimmable
- Mounting: Surface
- Housing: Aluminum & Polycarbonate
- Operating Temp: -4° to 113° F

Additional Detailed Specs On Next Page

LED Integrated Fixtures




CLS-MN-IF-10W18IN50K-FR-LK | CLS-MN-IF-22W4FT50K-FR-LK | CLS-MN-IF-60W8FT50K-FR-LK


Input Voltage: 120-277VAC	Available Wattages: 10W/22W/60W	Available Lengths: 18"/4FT/8FT
Color Rendering Index(CRI): ≥83	Lifespan: 50,000 hours	Pieces Per Case: 20pcs
Lens Type: Frosted	Mounting Type: Surface	Extra Connecting Whips Available: CLS-MN-IF-2I4FTLK - 40 Inch CLS-MN-IF-8FTLK - 60 Inch



Wiring & Linking Diagram

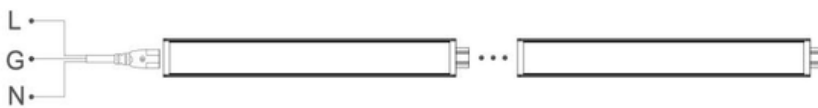

Included w/ Each Box

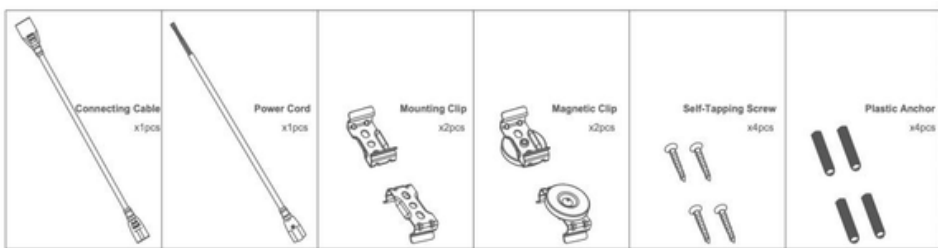

DIMENSIONS

18"

Length(L)	17.5 in / 444 mm
Width(W)	1.3 in / 33 mm
Height(H)	1.4 in / 35.56 mm

4FT

Length(L)	47.35 in / 1202 mm
Width(W)	1.3 in / 33 mm
Height(H)	1.4 in / 35.56 mm

8FT

Length(L)	93.5 in / 2375 mm
Width(W)	1.3 in / 33 mm
Height(H)	1.4 in / 35.56 mm

