

Peramin[®] SMF 10

Plasticizer - water reducer

- Delivers high strength
- Delivers homogeneity
- Delivers flowability



Peramin® SMF 10

Updated :04/2014

Plasticizer - water reducer

Description

Peramin® SMF 10 is a dispersing agent.

Peramin® SMF 10 is well adapted to conventional cement, binder based on calcium sulfate or calcium aluminates, puzzolans or other fillers.

Peramin® SMF 10 gives an homogeneous and non-segregating mortar and grout.

Peramin® SMF 10 renders the possibility to reduce water content thus increasing strength.


Compatibility

Peramin® SMF 10 is compatible with all **Peramin®** range as well as with most existing redispersible powder systems, accelerators and retarders.

Lab trials are advised before any industrial use.

Application

Concrete
Dry-mortar industry

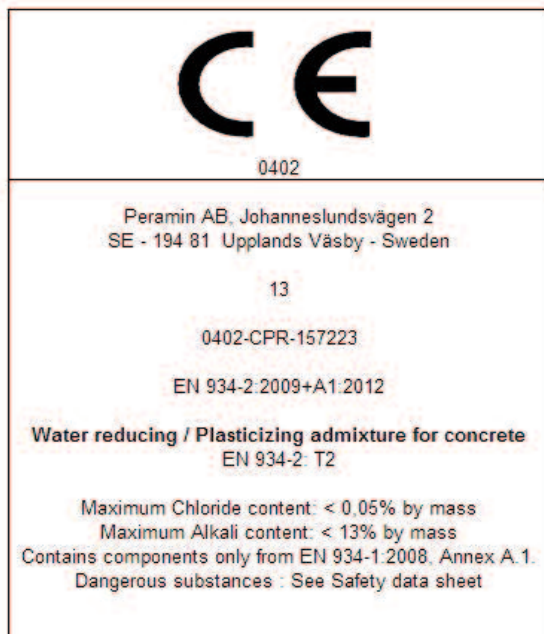

Specifications

	Datas	Methods
Appearance	Off-white Powder	PERPA001
pH (5% solution)	8,5 ± 1	ISO976
Alkali as Na ₂ O eq. (% by mass)	< 13	EN480-12
Dry Content (% by mass)	93,5 ± 1	EN480-8
Chloride content (% by mass)	< 0,05	EN 480-10

The specifications of **Peramin® SMF 10** conform to the requirements defined in the norm EN 934-2 : concrete admixtures - definitions, requirements, conformity, marking and labelling.

Dosage

Depending on the application, the dosage of **Peramin® SMF 10** varies from 0.2% to 2% weight/weight to binder. Generally, the product will not effect the setting. The product may cause a slight retardation at higher dosage or at low temperatures.

Packaging

- ♦ Pallet of 30 sacks of 25 kg

Conditions of storage

- ♦ Shelf life : 24 months in unopened bags.
- ♦ The product may absorb moisture and should be stored in a dry area.
- ♦ Opened bags should be carefully resealed and used up within a relatively short period of time.
- ♦ When stored dry, it will retain its properties for at least 24 months.

Peramin warrants that the products comply with the specifications stated herein to the exclusion of any other warranty, express or implied. Peramin makes no representation or warranty of any kind, either express or implied, as to the merchantability or fitness for a particular purpose or use of the products. The warranty shall be limited to the replacement of the non-conforming products or, at Peramin's option, the refund of the purchase price. Any technical advice, recommendations or information are given based Peramin's current knowledge and experience of the products and are deemed to be accurate. However, Peramin undertakes no liability or responsibility of any kind in respect thereof. Users are invited to check that they have the latest version of this document.