


PVC Power Coil Cables 12/300/600VOLT

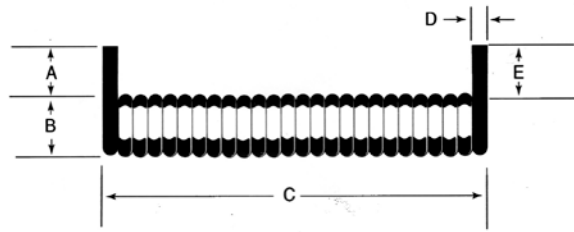

These coil cables have excellent colorability and fair coil retention. The temperature rating is **-60°F to +105°C** in all environments. Recommend for lighting application where the coil is not required to extend and retract repetitively.

CABLEscience® stocks the most popular cable sizes in **2ft. (C)** retracted - **10ft.** extended and **4ft. (C)** retracted - **20 ft.** extended length. Straight leads (**A** and **E**) are 6" each end. Custom coil cables are manufactured to order in extended lengths up to 60 ft.

Part No. 20 ft. EXT.	Cond. No.	AWG. SIZE	Volt rating	Cable Type	AMP rating	Cable " O.D. (D)	Coil " O.D. (B)
VC242-20	2	24 (41str)	12	OEM	800 MA	0.128	0.560
VVC183-20	2	18	300	SVT	7	0.250	0.900
VVC182-20	3	18	300	SVT	7	0.260	0.900
VCJ183-20	2	18	300	SJT	10	0.295	1.00
VCJ184-20	3	18	300	SJT	10	0.330	1.375
VCJ187-20	4	18	300	SJT	7	0.350	1.375
VCJ162-20	2	16	300	SJT	13	0.315	1.125
VCJ163-20	3	16	300	SJT	13	0.355"	1.375
VCJ164-20	4	16	300	SJT	10	0.410"	1.625
VCT162-20	2	16	600	ST	13	0.375	1.440
VCT163-20	3	16	600	ST	15	0.395	1.625
VCT164-20	4	16	600	ST	10	0.430	1.700