

ES4000 230/115V +HUK

LONG RUN ENERGY



A petrol generator designed specifically for intensive operations where performance power is demanded by professional user, over an extended period of time.

Main Features

Frequency	Hz	50
Voltage	V	230/115
Power factor	$\cos \phi$	0.9
Phase		1

Power Rating

Emergency Standby Power ESP	kVA	3.4
Emergency Standby Power ESP	kW	3.1
Continuous power COP	kVA	2.9
Continuous power COP	kW	2.6

Ratings definition (ISO-8528)

ESP - Emergency Standby Power:

It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

COP - Continuos Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously for an unlimited number of hours, with the maintenance intervals and procedure being carried out as prescribed by the manufacturers.

Engine specifications

Engine Brand	Honda	
Model	GX200	
Engine cooling system	Air	
Displacement	cm ³	196
Aspiration	Natural	
Operating Speed-Nominal	rpm	3000
Speed governor	Mechanical	
Fuel	Petrol	
Oil capacity	l	0.6
Starting system	Recoil	



Alternator Specifications

Type	Brushless	
Class	H	
IP protection	23	
Poles	2	
Frequency	Hz	50
Voltage tolerance	% +5; -10 (cosφ1)	
Voltage regulation system	Capacitor	

Dimensional data

Length	(L) mm	623
Width	(W) mm	409
Height	(H) mm	500
Dry weight	kg	43
Fuel tank capacity	l	11

Autonomy

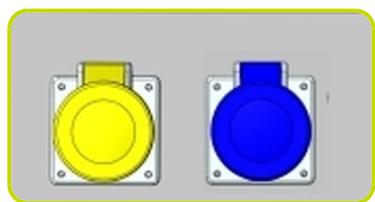
Fuel consumption at 75% of Load	l/h	1.18
Fuel consumption at 100% of Load	l/h	1.57
Running time at 75% of load	h	9.32
Running time at 100% of load	h	7.01

Noise level

Guaranteed noise level (LWA)	dB(A)	95
Noise pressure level @ 7 m	dB(A)	67

COMMANDS

- Selector switch: OFF - ON
- Starting systems: Recoil
- Selector switch 115/230V
- Fuel Cock

**PROTECTIONS STANDARD**

- Thermal protection
- Oil Guard

SOCKET TYPE

2P+T CEE 115V 16A IP44	1
2P+T CEE 230V 16A IP44	1