




Xuchang DADA Technology Co.,Ltd

Address: NO.612 HUAYUAN COUNTRY, SHIGU TOWN, CHANGGE CITY, HENAN PROVINCE, CHINA

Phone: +86-13603031941

E-mail: george@dadatec.com

Technical Information

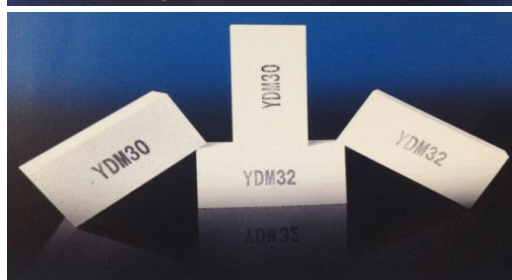

Index Mode No.	Light Insulation Brick					
	Chemical Composition			Volume Density g/CM3	Compressive Strength at Normal Temperature MPa	Rupture Strength at Normal Temperature Mpa
	AL2O3	SiO2	Fe2O3			
YDM-23 Max 1300°C	42%	54%	0.8%	0.5	1.2	0.9
	42%	54%	0.8%	0.6	1.3	1.0
	43%	53%	0.8%	0.6	1.6	1.1
	45%	52%	0.9%	0.8	2.5	1.4
	46%	51%	0.9%	1.0	3.5	1.8
YDM-26 Max 1400°C	53%	42.5%	0.8%	0.7	2.0	1.2
	54%	41.5%	0.8%	0.8	2.5	1.4
	55%	40.5%	0.9%	0.9	3.0	1.6
	55%	40.5%	0.9%	1.0	3.5	1.8
YDM-28 Max 1500°C	58%	33%	0.8%	0.9	3.0	1.6
	60%	32%	0.7%	1.0	3.5	1.8
	63%	31%	0.6%	1.2	4.5	2.0
YDM-30 Max 1600°C	70%	27%	0.5%	1.1	4.0	1.8
	72%	26%	0.5%	1.2	4.5	1.9
YDM-32 Max 1650°C	73%	25%	0.4%	1.1	4.0	1.9
	75%	24%	0.4%	1.2	4.5	2.0