


Continuous Threaded Rod

Fig. 146 (Formerly Afcon Fig. 650)

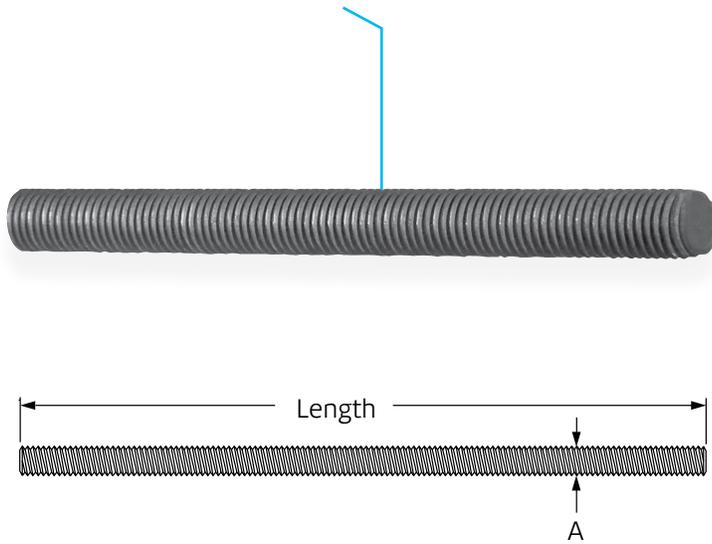

Size Range: ¼" through 1½" stocked in six, ten, and twelve foot lengths. Other even foot lengths can be furnished to order.

Material: Carbon steel or Stainless Steel Gr 304

Threads: National Coarse (USS), rod threaded complete length.

Finish: Plain or Zinc Plated (Hot-Dip Galvanized optional)

Maximum Temperature: Zinc Plated 450°F, Stainless Steel 650°F

Approvals: Complies with MSS SP-58.

Ordering: Specify rod diameter and length, figure number, name and finish.

Note: The acceptability of galvanized coatings at temperatures above 450°F is at the discretion of the end user.



Fig. 146: Dimensions (in) • Loads (lbs) • Weight (lbs)

Rod Size A	Threads per Inch	Max Load	Weight per Ft.
		650° F	
¼	20	240	0.12
⅜	16	730	0.30
½	13	1,350	0.53
⅝	11	2,160	0.84
¾	10	3,230	1.20
⅞	9	4,480	1.70
1	8	5,900	2.30
1¼	7	9,500	3.60
1½	6	13,800	5.10

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	