

# BNA

## TUFFIX

# GOH

# S1

CONFORMS TO  
**C2TE-S1**  
EN 12004

CONFORMS TO  
**Type 3**  
IS 15471

# गोह

## High-End Deformable Cementitious Tile Adhesive

TILES & STONES • WALL & FLOOR • INDOOR & OUTDOOR

High-end  
Deformable  
Cementitious  
Tile Adhesive

# 20kg


### Recommended Substrates:

Versatile adhesive for fixing large format tiles, mosaics, and stones on a variety of surfaces. Designed for both vertical and horizontal applications, this adhesive is suitable for indoor and outdoor use, offering flexibility for various tiling project applications. Suitable for sound cementitious screeds, renders, plasters, concrete, gypsum boards, and cement based water-proofing membrane. Please review the technical data sheet or reach out to BNA Technical Services for consultation.


**Coverage:** 4-4.5 kg/sqm for 3mm bed thickness. Please note that the extent of coverage may differ based on the irregularities of the surface.




1. Clean the surface to get rid of oil stains, dirt, dust or any loose particles for proper bonding.

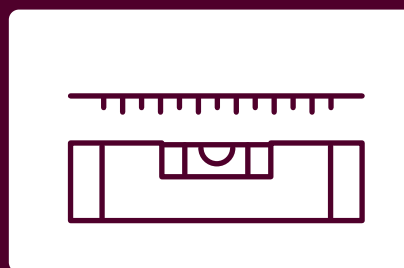


2. Ensure that the surface is flat (hard and rigid) for the intended application.

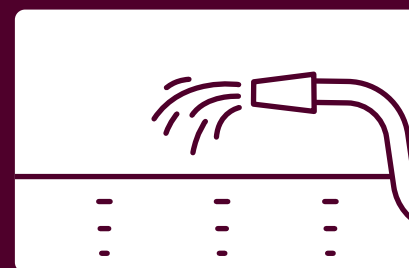


3. Ensure that the surface is well saturated before application in the case of cementitious substrates.

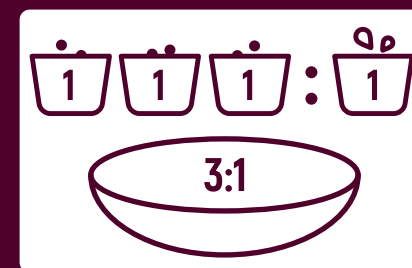


4. Gradually add POWDER to WATER in 3:1 ratio (by volume) to form a smooth workable paste.

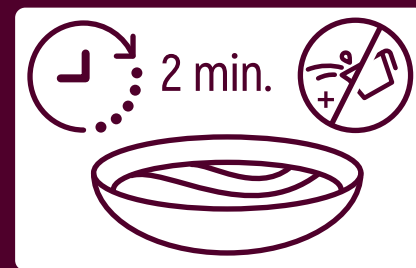

5. Wait for 2 mins. for the paste to mature. **DO NOT** add more water to extend the mixture's pot life.

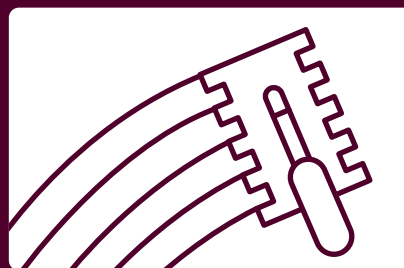

6. Apply and comb the adhesive evenly over the surface using a notched trowel.

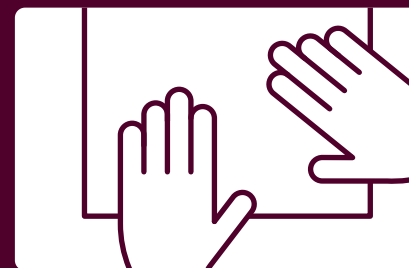

7. Firmly press the tile into the adhesive to ensure good initial bonding.



8. After 24 hours, start filling in the tile joints.

• May cause skin irritation • May cause serious eye damage • May induce an allergic skin reaction • May provoke respiratory irritation • Keep out of the reach of children • Read the label before using • In case of EYE CONTACT, gently rinse with water for several minutes. Take medical assistance immediately • Store in a locked-up location • Dispose of the contents/ container in compliance with local, regional, national, and international regulations.

For your safety, we recommend wearing gloves and safety goggles when handling this product. If any splashes occur on your skin or in your eyes, be sure to rinse them thoroughly with clean water. If irritation persists for an extended period, it is advisable to seek medical advice. Please do not reuse the bag for storing or packaging food or edible items.

Kindly be aware that this information is provided as a usage guide. We strongly encourage users to perform a trial to evaluate the product's suitability before implementing it on a larger scale. No explicit or implied guarantees or warranties are offered for the results, and the company cannot be held accountable for any subsequent damages. The technical parameters listed on the packaging are established based on standard laboratory conditions.

Manufactured by: Bharath Industries, Kongampara Road, Pampampallam PO, Kanjikode, Palakkad 678621  
Marketed by: BNA Building Solutions Pvt. Ltd., CC 63/2478-A3, Anjiparambil Complex, SA Road, Manorama Jn, Ernakulam, Cochin 682016

BEST BEFORE 12 MONTHS FROM MONTH AND YEAR OF MANUFACTURING.  
STORE IN DRY CONDITION

# 20 kg



Avoid hooks during  
bag handling.



www.bna-solutions.com

f /bnabuildingsolutions  
@ /bnabuildingsolutions  
v /bnabuildingsolutions

# S1

# GOH

TUFFIX

# BNA