

CTD16

Electric Pallet Truck



Advantages

CHARACTERISTICS

Configuration And Performance

- Electronic power steering system, light and low noise;
- Two-way magnetic valve, three drop speed mode;
- AC Driving system, NO carbon brush, maintenance free;
- Automatic lifting limit, proximity switch, long life;
- Metal shell-- High strength, safer.



Safety

- Curve automatic deceleration devices, more safe;
- Goods high position, vehicle automatic deceleration;
- Controller with Multiple automatic protection;
- Emergency reversing device/Emergency brake switch.

MANUFACTURER'S DATA AND TECHNICAL CHARACTERISTICS

Characteristics			
1.01	Manufacturer		CHL
1.02	Model		CTD16
1.03	Type		Straddle
1.04	Mast type		Full free 3-stage
1.05	Loading capacity	lbs	3500
1.06	Load center	in	24
1.07	Operating type		walkie
1.08	Wheels type		PU
1.09	Lift height	in	177.2/185.0/196.9/212.6
1.10	Max.extend height	in	196.7/204.7/216.5/236.2
1.11	Mast lowered height	in	81.2/83.9/87.8/93.0
1.12	Overall length	in	75.2
1.13	Overall width	in	31.5
1.14	Min.Turning radius	in	59
1.15	Min.Aisle width for pallets 40×48	in	79.9
1.16	Travel speed,loaded/unloaded	mph	3.1/3.4
1.17	Lift speed,loaded/unloaded	fpm	25.6/35.4
1.18	Gradeability,loaded/unloaded	%	5/7
1.19	Battery voltage/capacity	V/Ah	24/200(Lithium Battery)
1.20	Brake		Electromagnetic/Regenerative
1.21	Controller		ZAPI
1.22	Battery weight	lbs	218
1.23	Service weight with battery	lbs	3007

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

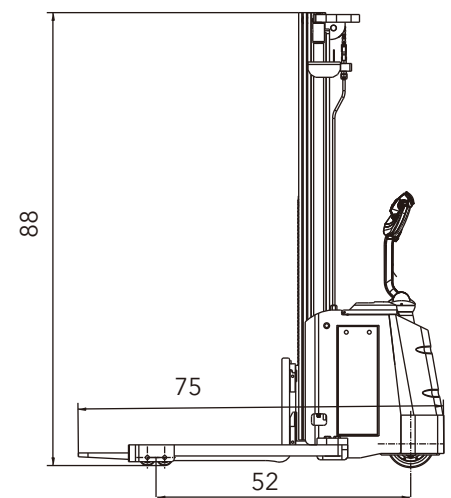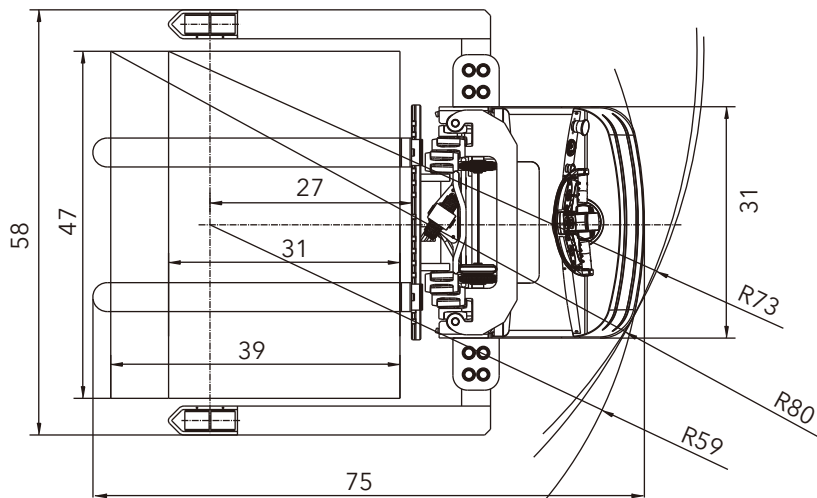

CHL COMPANY

Add / 4071 Southmeadow Pkwy W Suite 100 Atlanta,GA 30349
Tel / 404 502 4867

AUTHORIZED DEALER