


Westcountry Slate

Making Natural Slate Accessible

Cornwall and Devon

Carclaze Natural Slate™

Standard Selection

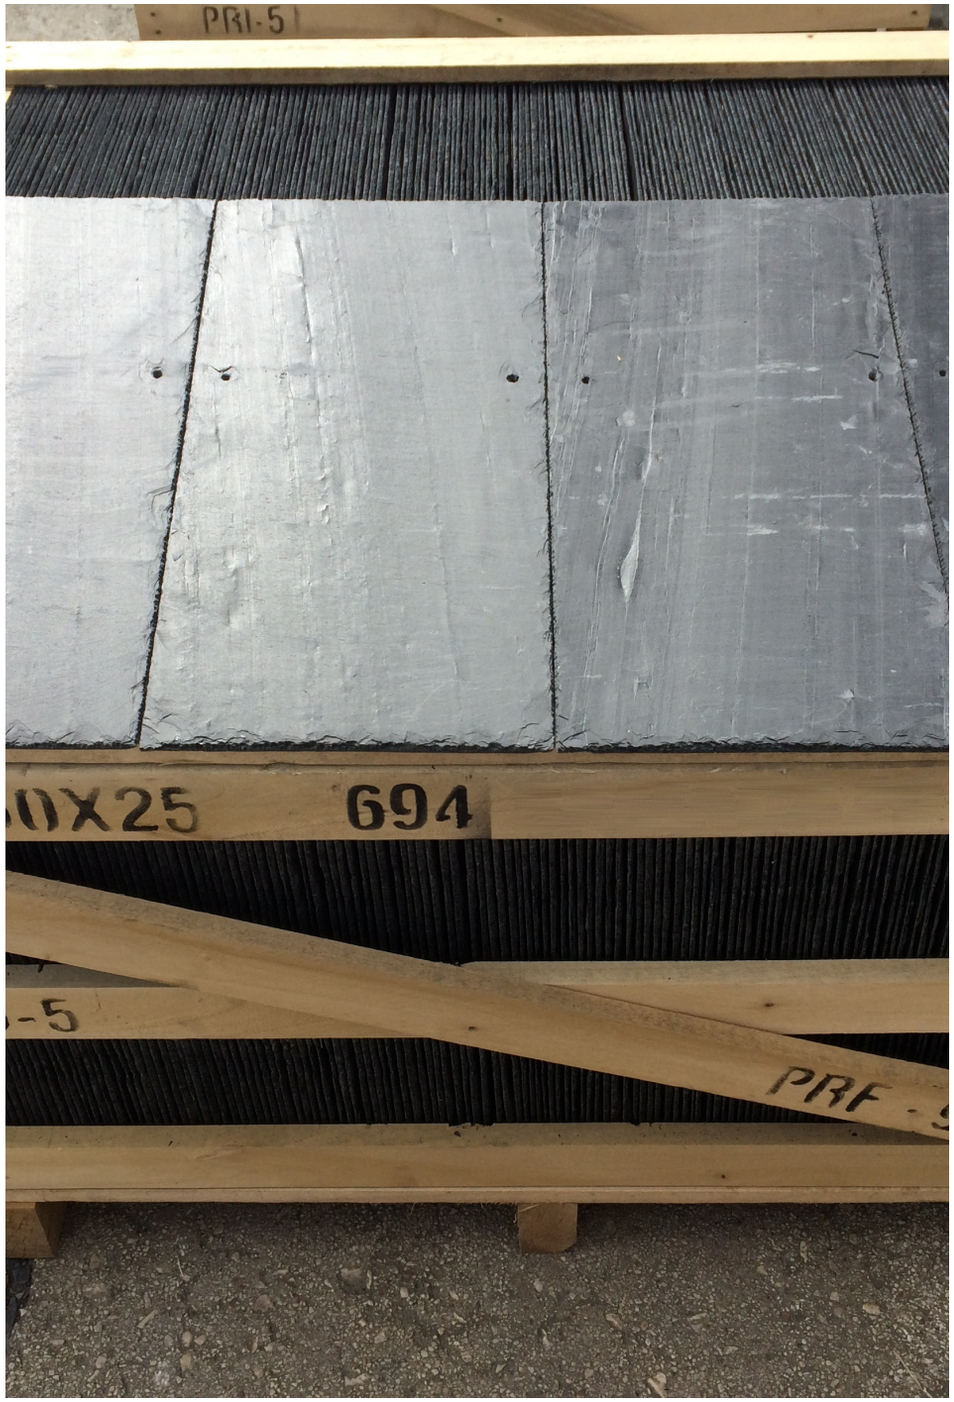

A Reliable & Consistent Choice

Carclaze Natural Slate™ is a reliable, consistent natural slate, imported and held in stock by Westcountry Slate. It is a smooth-faced, regular slate in an attractive mid-grey, supplied in a Standard grade.

It is available in a choice of formats, and every slate is tested to EN 12326, so our customers and distributors can be confident in the quality of each delivery.

We recommend Carclaze for residential re-roofs and housing developments: a durable, good-looking natural slate roof for the homeowner for many years to come.

Tested to BS EN 12326
CE & UKCA marked
Available from stock

Quality from Quarry to Roof

A Smooth, Regular Slate

Carclaze Natural Slate™ is a natural slate chosen by Westcountry Slate for its regular, smooth face and even mid-grey colour.

Its colour sits comfortably alongside traditional slate roofs, so Carclaze blends into established streetscapes just as well as it suits new-build developments.

As with any natural slate, Carclaze should be sorted by thickness before fixing, as the standards require. It arrives in sturdy timber crates, ready for site.


Carclaze is our Standard grade natural slate. Ask us about our other natural slates if your project needs a different look or grade.

In brief

A smooth-faced, regular mid-grey slate, Standard grade.





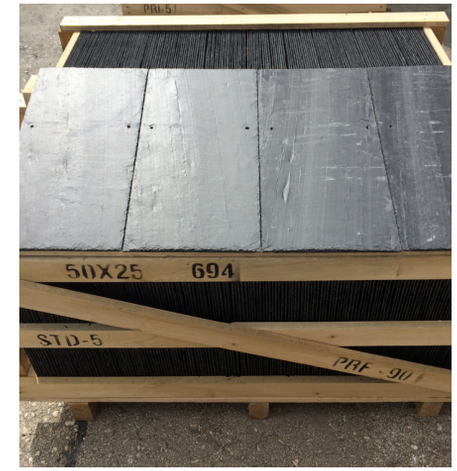

Carclaze Natural Slate™ on the roof and as delivered, in timber crates.

Sizes to Suit

Carclaze Natural Slate™ is available in a range of sizes to suit your project and the look you want for your home, or your client's.

Declared formats (mm)

600 x 300

500 x 250

400 x 250

Also available (mm)

400 x 250 PH

400 x 375


500 x 250 PH

500 x 375

Available in 5mm and 6mm thickness. The declared formats are the sizes covered by our Declaration of Performance; PH = pre-holed. Other sizes may vary in availability. Please ask for details.

Need a different size?

Call us on 01392 409390 and we will check availability.

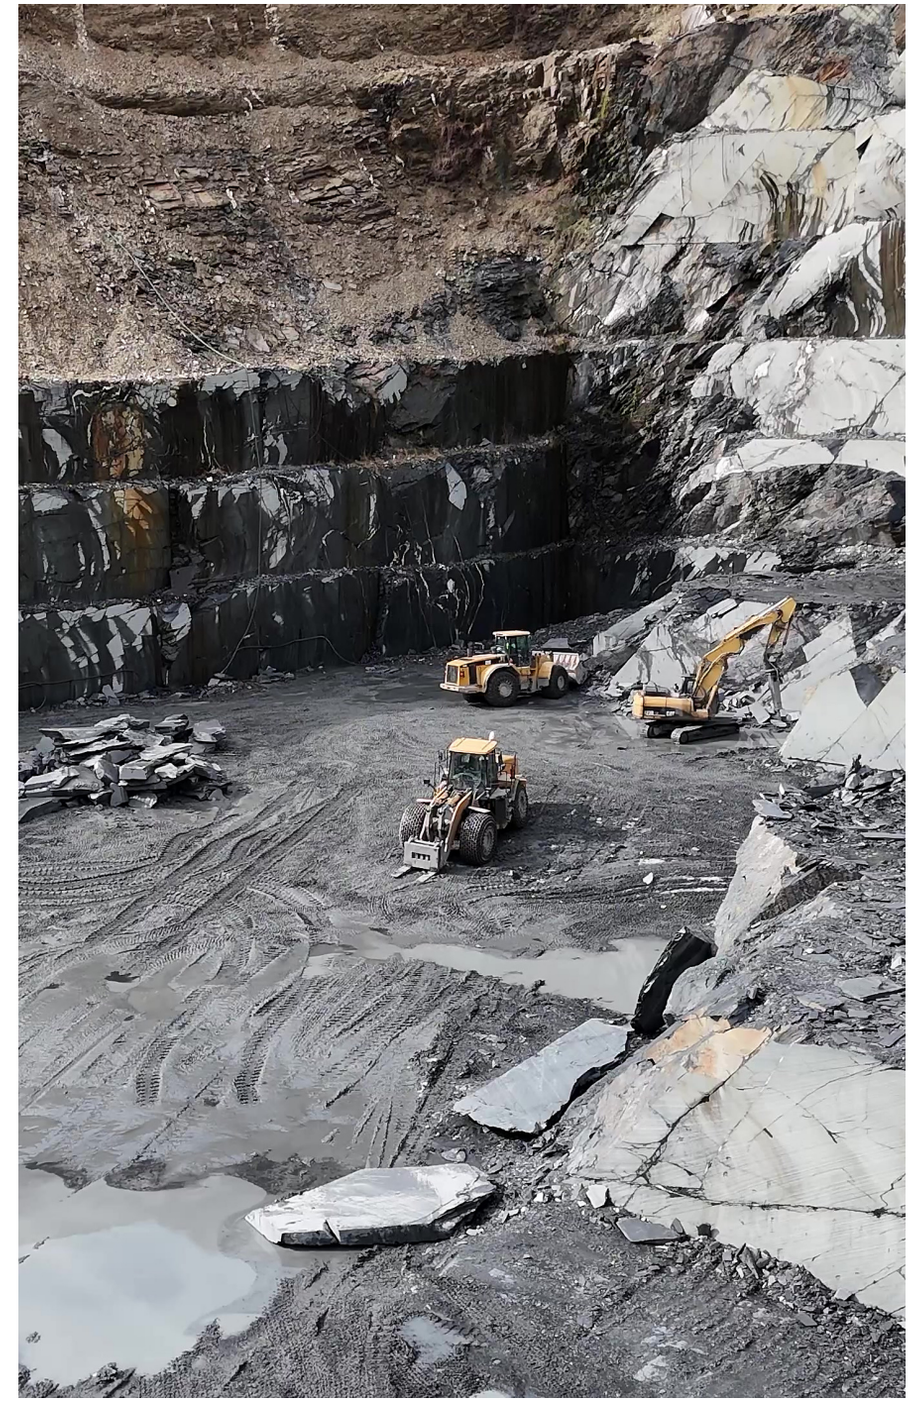







Look & Feel

Carclaze Natural Slate™ is imported and distributed by Westcountry Slate.

We import Carclaze Natural Slate™ into the UK and supply it through our trade counters in Devon and Cornwall and our network of outlets and distributors.

Westcountry Slate is a family owned and run business with over 25 years of roofing experience. We specialise in importing natural slate and work closely with trusted suppliers through long-standing relationships.

Ask your local distributor for a sample and see the smooth, mid-grey finish of Carclaze Natural Slate™ for yourself.

Natural & Sustainable


Carclaze Natural Slate™ is a natural stone, quarried and split rather than manufactured. That makes it a responsible and long-lived choice for homeowners, specifiers and developers.

- **A natural material.** Slate is split from the rock and needs no firing, coatings or chemical treatment before it reaches your roof.
- **Non-combustible.** It is considered to comply with Reaction to Fire Class A1, and the external fire performance is declared as B_{ROOF}.
- **Safe in use.** It releases no dangerous substances under normal use as roofing or cladding.
- **Built to last.** Low carbonate (0.4%) and non-carbonate carbon (0.6%) content, together with top W1, T1 and S1 test classes, support a long, low-maintenance service life.
- **Reusable.** Natural slate can be carefully salvaged and reused, so it keeps its value well beyond the life of a single roof.
- **Stocked locally.** We hold stock at our Devon and Cornwall depots, so South West projects get prompt, local supply.

A1
Reaction to fire
(considered to comply)

W1 T1 S1
Top BS EN 12326
test classes

0.4%
Carbonate
content

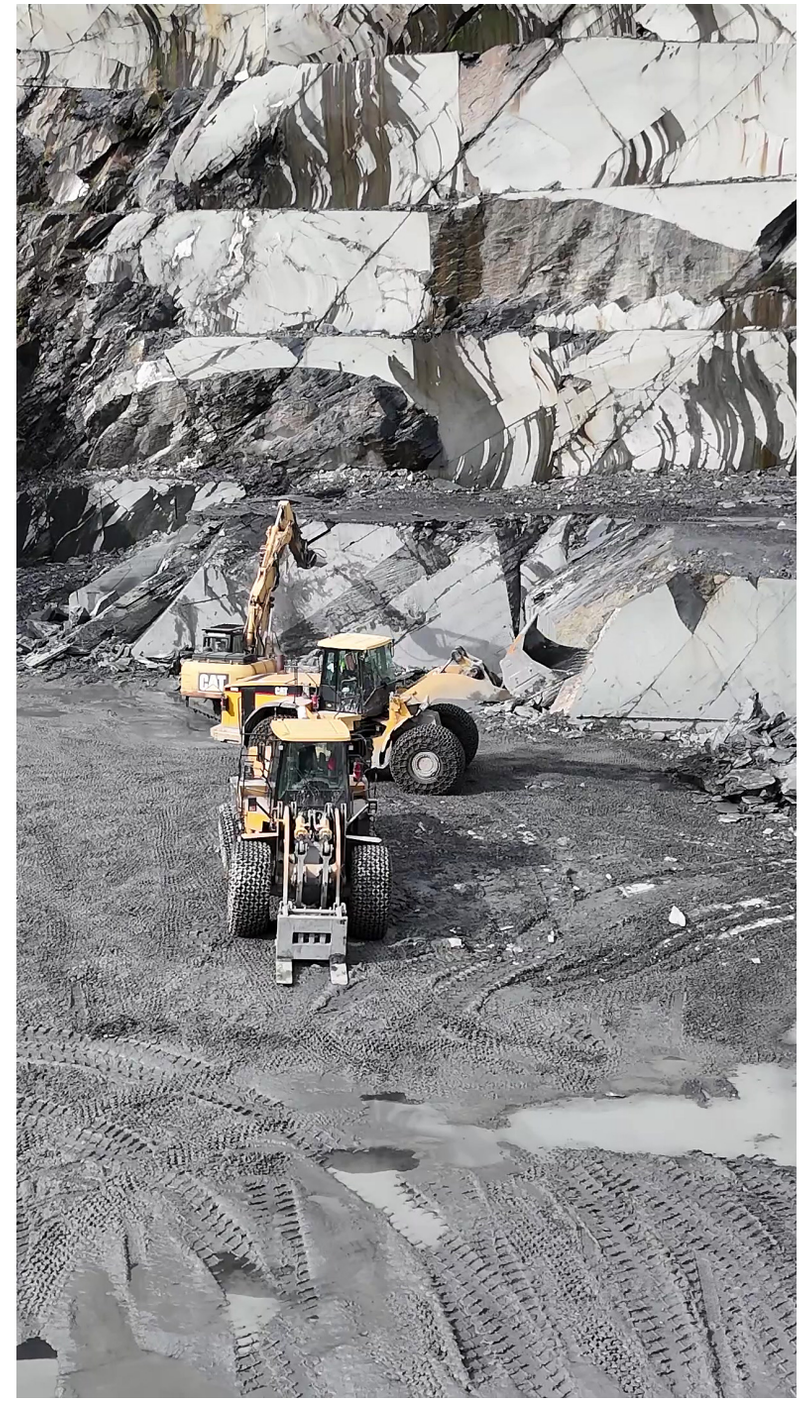

Tested to Last

Carclaze Natural Slate™ is tested to BS EN 12326 and achieves the top classes for water absorption (W1), thermal cycling (T1) and sulphur dioxide exposure (S1). It carries both CE and UKCA marking.

So homeowners, builders, merchants and architects can rely on Carclaze for many years of trouble-free roofing and cladding.

We can supply the Declaration of Performance for Carclaze Natural Slate™ on request, or you can download it from our website. It will help answer any technical questions and meet planning or specification requirements.

Technical Performance

Declared performance to BS EN 12326-1 (tested to EN 12326-1:2015 and EN 12326-2)

Product use	Roofing and exterior cladding
Declared formats	600 x 300, 500 x 250, 400 x 250
Nominal thickness	5mm and 6mm (declared 5mm ± 10%)
Length / width deviation	< ± 3mm
Squareness deviation	< ± 1%
Edge straightness deviation	< 6mm and < ± 1% of length
Flatness deviation	< 1.0%
Characteristic MoR	Longitudinal 53 MPa; transverse 40 MPa
Water absorption	W1
Freeze-thaw	Not required
Thermal cycle	T1
Sulphur dioxide exposure	S1
Carbonate content	0.4%
Non-carbonate carbon content	0.6%
External fire performance	B_{ROOF}
Reaction to fire	Considered to comply with Class A1
Dangerous substances	None in normal use as roofing or cladding
AVCP system	System 4

Figures taken from our Declaration of Performance for Carclaze Natural Slate™. Copies are available on request.









Your Local Distributor is:

Westcountry Slate

Making Natural Slate Accessible

To find your local distributor please contact:

Westcountry Slate Supplies Ltd

Devon
3 Budlake Road, Marsh Barton Trading Estate
Exeter, Devon EX2 8PY
Tel 01392 409390

Cornwall
Units 2, 3 & 4 Treviskey, Lanner
Redruth, Cornwall TR16 6AS
Tel 01209 822230

sales@westcountryslate.co.uk
www.westcountryslate.co.uk