




**Filtaworx®**

Automatic  
Self-Cleaning  
Screen Filter

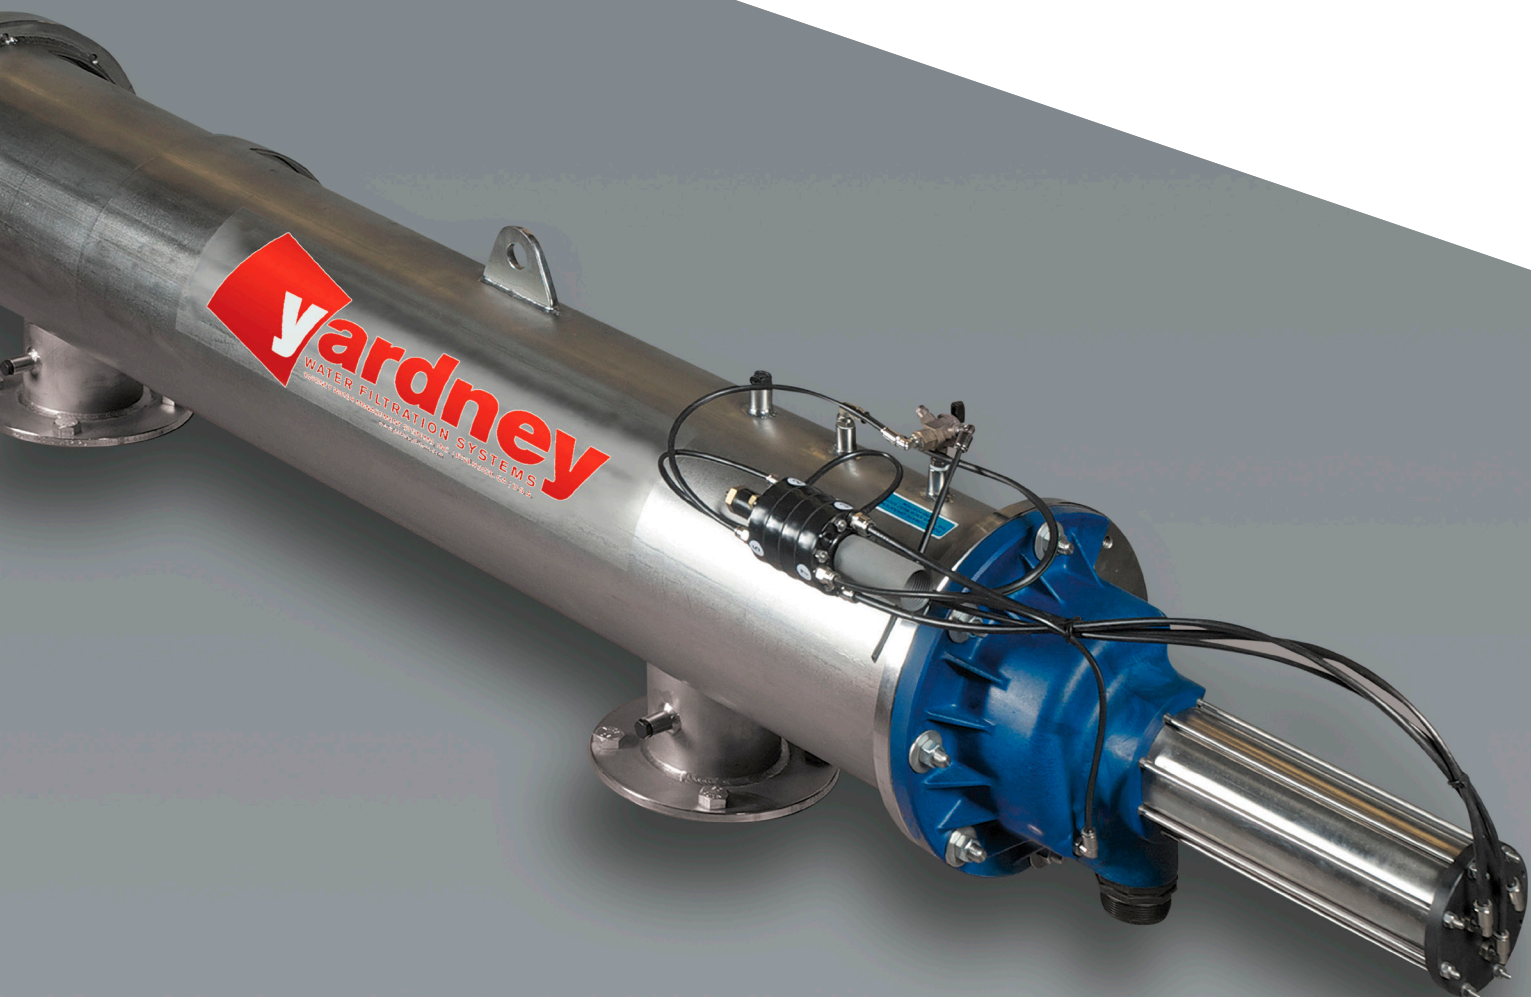

Industrial, Commercial & Municipal

# Filtaworx® Automatic Self-Cleaning Screen Filter

Time.  
Quality.  
Experience.  
Knowledge.

**Yardney Filtaworx automatic self-cleaning screen filters** provide excellent protection for industrial and commercial applications. Filtaworx screen filters are one of the most technically innovative self-cleaning filters available combining proven high performance, reliability and economy in a compact robust design.



Heavy duty stainless steel filter body provides corrosion resistance in most environments.

## Applications


- Removal of algae, slime or other organic contaminant as well as sand, grit and other inorganic contaminants with fine filtration down to 250 mesh or 50 microns
- Flow ranges from 110 gpm
- 150 psi standard operating pressure (high pressure systems available)
- Cooling towers, industrial process water, incoming plant water, waste water clean-up, industrial water for plant reuse

## Advantages


- Heavy duty stainless steel filter body
- Durable low maintenance self-cleaning mechanism
- Wide range of screen mesh sizes available in 20, 40, 80, 100, 120, 150, 200 and 250 mesh
- Hydraulically or electrically controlled internal cleaning mechanism
- Automatic self-cleaning piston action moves in both directions
- Sacrificial anode
- Automatic operation of the self-cleaning backflush cycle is achieved when a pre-set pressure drop (5-7 psi) across the filter is reached
- Sectional screens allow easy replacement of a section of screen versus entire cartridge if damage occurs to the screen
- Compact and simple installation can be mounted in any position or orientation, with minimal space requirements



Twist-lock sectional screens provide easy cartridge replacement.

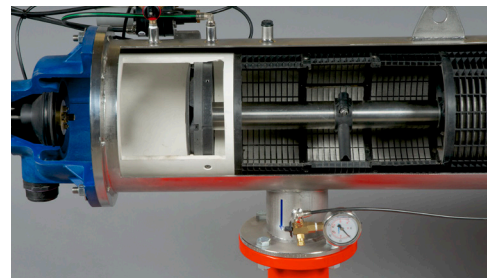


Minimal moving parts means high reliability in the field.

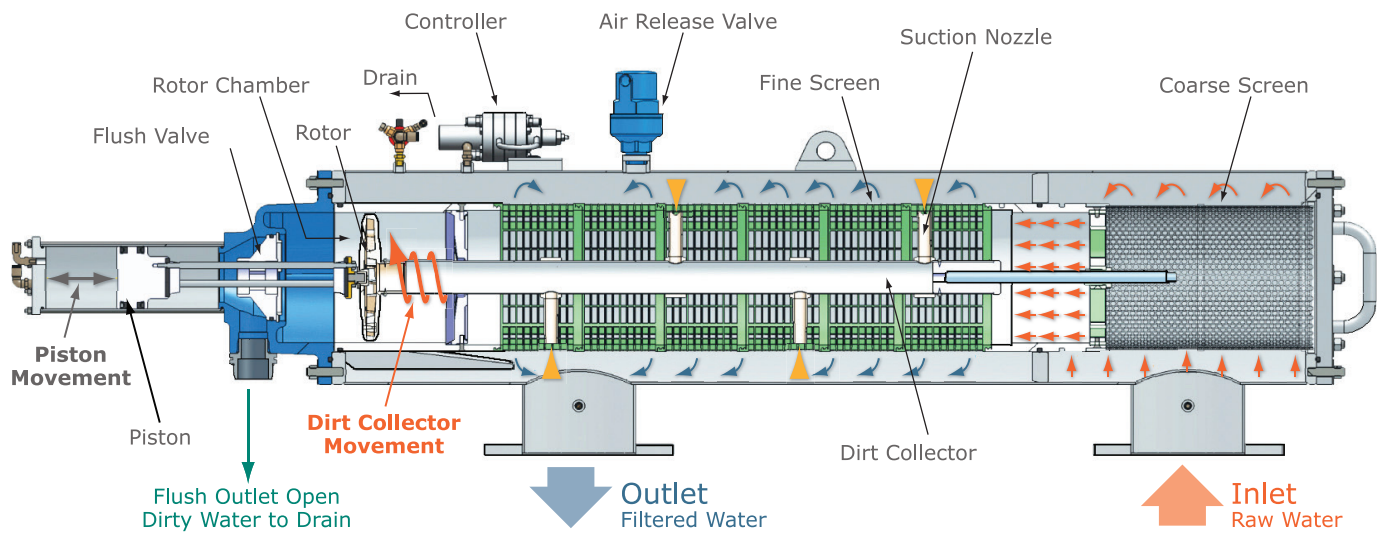

## Filtration System Operation

- During normal filtering mode the raw water enters the inlet of the filter and passes through the coarse screen (the 1/4" perforations remove large debris that may obstruct the lower mechanism).
- Water then travels to the inner section of the filter and through the fine screen to the outlet. The solids in the water are trapped on the fine screen, eventually causing a pressure drop (dp) across the filter.
- At a pressure drop of 5–7 psi the controller activates the cleaning cycle by opening the flush valve to drain (atmosphere).
- The interconnection of the suction nozzles, via the dirt collector to the drain, causes a back flushing or "vacuum clean" effect on the fine screen with a high velocity suction jet of water from the clean side of the screen, removing the dirt on the screen as it passes through.
- The water escaping via the rotor causes the dirt collector and suction nozzle assembly to rotate. The piston moves this assembly down and back along the entire length of the fine screen in a spiraling motion, cleaning the screen in approximately 15 seconds.
- At completion of flushing, the valve closes and the filter is ready for the next cycle.

## Pressure Losses For Various Flow Capacities

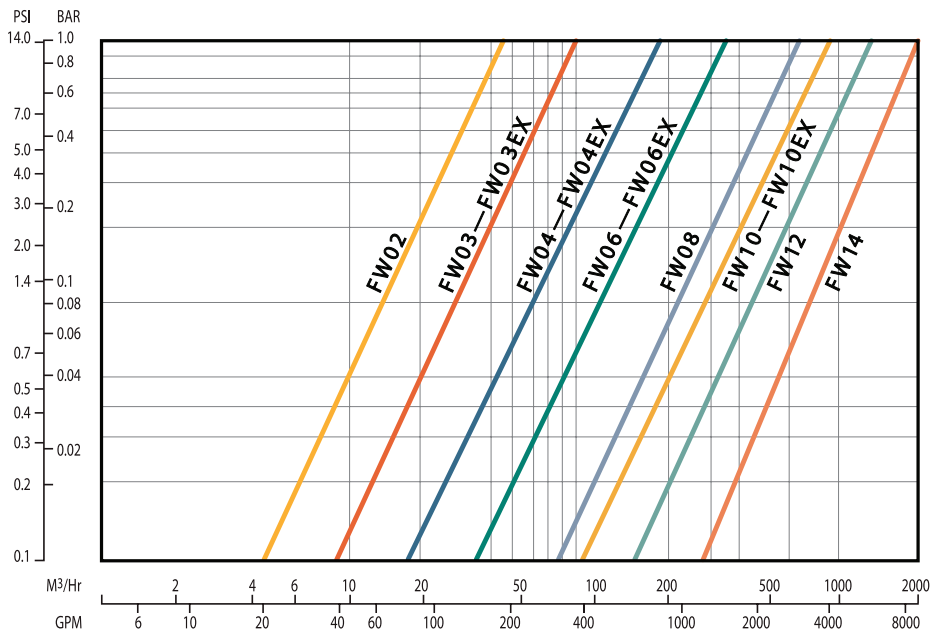

Maximum working pressure	150 psi
Minimum line pressure required during flush cycle	30 psi
Approximate flush time	15-17 sec
Flush volume	40 gal
Maximum working temperature	150 °F



# Filtaworx® Automatic Self-Cleaning Screen Filter

## Specifications

SPECIFICATIONS   HORIZONTAL																
Model	Nominal Flow Rate		Filtration Surface Area (inches)	Maximum Pressure	Inlet/Outlet	Flush Port	A	B	C	E	F	H	L	X	Y	Z
	gpm	m³/hr														
FW04EX	440	100	870	150 psi	4"	2"	9 1/4"	35 7/16"	18 3/8"	10 3/4"	9"	20 5/8"	76 7/8"	28 3/4"	14 1/4"	143 3/4"
FW06	790	180	870	150 psi	6"	2"	10 5/8"	35 7/16"	19"	12 3/4"	11"	23"	79 3/8"	30 3/4"	14 1/4"	146 1/2"
FW06EX	790	180	1258	150 psi	6"	2"	10 5/8"	35 7/16"	33 1/4"	12 3/4"	11"	23"	93 3/4"	30 3/4"	14 1/4"	174 1/2"
FW08	1400	318	1258	150 psi	8"	2"	10 5/8"	35 7/16"	38"	12 3/4"	15 1/4"	23"	102 7/8"	30 3/4"	15"	183 1/2"
FW10	1760	400	1258	150 psi	10"	2"	12 1/4"	35 7/16"	38"	14"	15 1/4"	23 1/2"	102 7/8"	31 1/2"	15 3/4"	183 1/2"
FW10EX*	1760	400	1614	150 psi	10"	2"	12 1/4"	43 5/16"	38"	16"	26 7/8"	26 1/4"	122 1/4"	34 1/4"	16 1/2"	209"
FW12*	2640	600	1614	150 psi	12"	2"	12 1/4"	43 5/16"	38"	16"	26 7/8"	26 1/4"	122 1/4"	34 1/4"	16 1/2"	209"
FW14*	3960	900	1886	150 psi	14"	2"	12 1/4"	50"	38"	16"	20 1/8"	26 1/4"	122 1/4"	34 1/4"	17 3/4"	209"

\*Products with an asterisk do not include sacrificial anodes

### Standard assembly includes:


- 304 stainless steel body with flanged inlet and outlet
- Glass reinforced nylon support structure with 316 stainless steel mesh fine screen
- Hydraulic controller
- Sacrificial Anode (FW04EX-FW10 only)
- Models FW10EX, FW12 and FW14 include four-layer sintered 316 stainless steel screens

### Available options:

- Four-layer sintered 316 stainless steel screens
- 316 stainless steel housing available on request
- Alternative materials of housing, seals, screen cartridge, etc., dependent on application
- High pressure
- Electric controller
- Sustaining valve (highly recommended)

SPECIFICATIONS   VERTICAL											
Model	Nominal Flow Rate		Filtration Surface Area (inches)	Maximum Pressure	Inlet/Outlet	Flush Port	A	B	C	X	Y
	gpm	m³/hr									
FW02*	110	25	189	150 psi	2"	2"	7 1/4"	7 3/4"	8"	28 3/8"	22"
FW02-F*	110	25	189	150 psi	2" Flg	2"	8 1/4"	8 1/4"	8"	28 3/8"	22 5/8"
FW03*	220	50	189	150 psi	3"	2"	7 5/8"	8 3/8"	8"	28 3/8"	22 5/8"
FW03-F*	220	50	189	150 psi	3" Flg	2"	8 1/4"	8 1/4"	8"	28 3/8"	22 5/8"
FW03EX*	220	50	307	150 psi	3"	2"	8 1/4"	12 3/8"	8 1/2"	35 1/2"	27 1/8"
FW04*	350	80	307	150 psi	4"	2"	9 1/4"	12 3/8"	8 1/2"	35 1/2"	27 1/8"

\*Products with an asterisk do not include sacrificial anodes

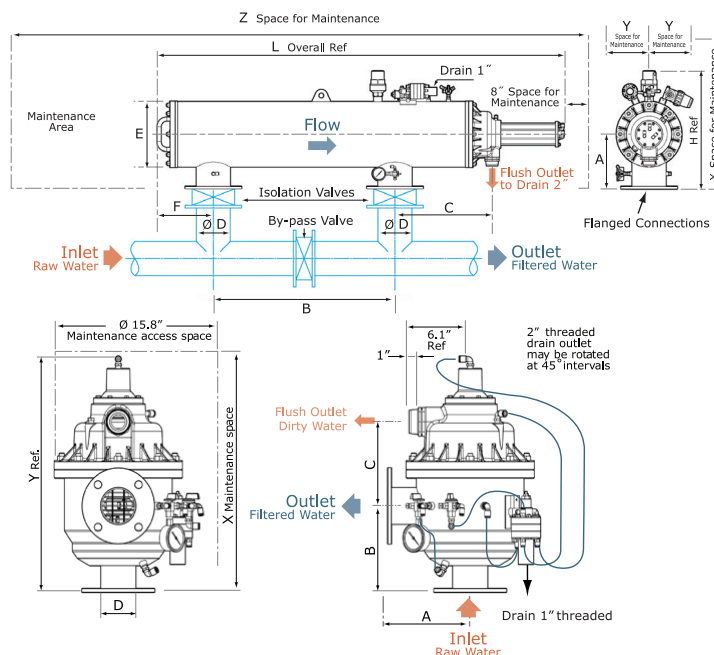

### Filtaworx ordering code part number breakdown:

Electric or Hydraulic	PRODUCT	Screen Size			Filter (inches)	Mesh
		1 Standard	2 Long	3 Extra Long*		
E	FW147	1			06	150
H	FW147	2			06	150

\*Extra long screen (3) only available on FW04

EFW147 1 06 150

Model FW06: Electric with standard screen, 6" filter, 150 mesh

HFW147 2 06 150

Model FW06: Hydraulic with long screen, 6" filter, 150 mesh



www.yardneyfilters.com

Phone: 951.656.6716  
Toll-Free: 800.854.4788  
Fax: 951.656.3867  
info@yardneyfilters.com